

spinlock

BE ADVENTURE-PROOF

Certified



Corporation

CONTROL

PROTECT

SENSE

WELCOME TO THE TRADE GUIDE

Building on several years of research into buoyancy performance, the updated VITO AFS features a new revolutionary integrated flotation construction. The AFS (Advanced Flotation System) puts the buoyancy of the inflated jacket where it functions best - giving enhanced rotation, freeboard and most importantly stability in the water.

In our SENSE category we are pleased to be debuting Rig-Sense PRO, measuring tension in both Rod -6 to -16 and Wire Ø5-20mm Cable, up to 8000kgs. Handheld, simple to operate with a clear digital display, Rig-Sense Pro offers OEM's, Riggers, Spar Manufacturers and industrial installers an easy-to-use tool for accurately recording the load data.

Other new products continue to feature in our ranges with a host of new ways for Spinlock to keep your family safe and protected on the water and on your adventures, in our VENTURE and EXPLORER ranges.

Our Trade channels are essential to our success, and we invest continuously in new ways to support you. Our Ambassador Training videos gives our partners access to bitesize video training modules to help understand and sell our technical ranges. Our new API provides you with all of the published data you need to sell the Spinlock range. Part Code, Part Description, EAN UPC Code, Country of Origin, Product Weight, RRP, Stock, Web Product Descriptions, Features, Specifications, Images and Videos. If we make an update on our ERP or Website, it's in the API immediately and updating your customers webpages and ERP systems, immediately with the accurate and up to date information.



Spinlock Limited quality management system is accredited to:



CONTROL	
6-7	Rope Holding Comparison Chart
8	PXR Cam Cleat
10	XAS Powerclutch
12	XTS Powerclutch
13	XCS Powerclutch
15	XTX Powerclutch
16	XTR Powerclutch
17	ZR Jammer
18	XX Series - XXA , XXB & XXC Powerclutch
20	ZXB Jammer
21	ZS Alloy Powerjammer
22	ZS Carbon Powerjammer
23	ZS-RLB Remote Release ZS Open Powerjammer PD Carbon Padeyes
24	TSR Fully Customisable Organiser
26	TSR Organiser
27	TSR Low Organiser
28	TWR Sheave Range TWF Winchfeeder
29	T25 Organiser BE10 Multiple Bullseye
30	T38, T50 & TC50 Organisers
33	EAC Carbon Tiller Extension
34	EA & EJ Tiller Extension
36	EJB Tiller Extension
37	WL Line Leads BE Bullseye
38	BRS Spinnaker Block SUA Mini Jammer
39	RF Sail Feeder ATCU Throttle Control

PROTECT	
52	Lifejacket Comparison Chart
54	Harness Release System
55	Deckvest 6D
58	Deckvest VITO AFS NEW
62	Deckvest LITE
64	Deckvest LITE+
66	FIDO Dog Flotation
68	Deckvest NEMO & NEMO+ NEW
72	Deckvest CENTO
74	ALTO Belt Pack
78	ALTO Throw Holder
79	Waterproof Pack Range
80	Essentials Pack Range
82	EXPLORER Pack Range NEW
86	VENTURE Pack Range NEW
88	Tote Bags NEW
89	Waterproof Storage Bag NEW
90	WING & FOIL PFD
92	Compatible Beacons
93	Lume-On™
93	Pylon™
94	Safety Line Cutter
94	Performance Kneepads
95	Performance Safety Lines NEW
97	Deck Pro
98	Mast Pro
100	Mast Float NEW
104	USCG/TC Approved
116	Pro-Tech & Pro-Tech Weld NEW
115	DURO SOLAS NEW
118	DURO SOLAS+ NEW
123	DURO
124	DURO+

SENSE	
133	Load Sense
135	Rig-Sense Pro NEW
138	Rig-Sense
140	Sense Apps
CONTROL SUPPORT	
40	Upgrades & Spares
42	Weights & Fasteners
45	Dimensions
PROTECT SUPPORT	
126	Upgrades & Spares Matrix
128	Lifejacket Inflation Systems
129	PROTECT Size Guides & Weights
SENSE SUPPORT	
133	SENSE: See online resources www.spinlock.co.uk/sense
MARKETING	
142	Marketing Materials Menu
143	PROTECT Retail Displays
144	CONTROL & PROTECT Displays & Retail Shelves
149	Media Portal
150	Spinlock Training Programme

spinlock
BE ADVENTURE-PROOF



Being B-Corp means adhering to the highest standards of social and environmental performance, transparency and accountability. We take a more rigorous approach to business decisions by focusing on people and the planet, in addition to profit.

Certified B Corporations are leaders of a global movement of people using business as a force for good and redefine success in business. By voluntarily meeting higher standards of transparency, accountability, and performance, Certified B Corps are distinguishing themselves in a cluttered marketplace by offering a positive vision of a better way to do business.



CONTROL
ENHANCING PERFORMANCE

ROPE HOLDING COMPARISON CHART

CLEATS - HANDLE RELEASE

PRODUCT	MODEL	LINE DIA	SWL AT MAX LINE DIAMETER	MULTIPLES AVAILABLE	COLOUR	CERAMIC COATED PARTS	SIDE-MOUNT VERSION	LOCK OPEN VERSION	REMOTE OP	WEIGHT (STANDARD MODEL EXC FASTENERS)	FASTENERS	FASTENER HEAD TYPE	SUPPLIED
PXR	PXR0206	2-6mm (3/32-1/4")	140kg (308lbs)	-	●	-	-	-	-	43g (1.5oz)	2 x M4 (5/32")	CSK Head	-
	PXR0810	8-10mm (5/16-3/8")	200kg (440lbs)	-	●	-	-	-	-	84g (2.9oz)	2 x M5 (3/16")	CSK Head	-
	PXR0206/SW	2-6mm (3/32-1/4")	140kg (308lbs)	-	●	-	-	-	-	77g (2.7oz)	3 x M5 (3/16")	CSK Head	-
	PXR0810/SW	8-10mm (5/16-3/8")	200kg (440lbs)	-	●	-	-	-	-	124g (4.3oz)	3 x M5 (3/16")	CSK Head	-
	PXR0206/VP	2-6mm (3/32-1/4")	140kg (308lbs)	-	●	-	-	-	-	97g (3.4oz)	Bracket mount	Pan Head or Rivet	-
	PXR0206/T	2-6mm (3/32-1/4")	140kg (308lbs)	-	●	-	-	-	-	53g (1.9oz)	2 x M4 (5/32")	CSK Head	-
	PXR0810/T	8-10mm (5/16-3/8")	200kg (440lbs)	-	●	-	-	-	-	101g (3.5oz)	2 x M5 (3/16")	CSK Head	-

CLUTCHES - HANDLE RELEASE



PRODUCT	MODEL	LINE DIA	SWL AT MAX LINE DIAMETER	MULTIPLES AVAILABLE	COLOUR	CERAMIC COATED PARTS	SIDE-MOUNT VERSION	LOCK OPEN VERSION	REMOTE OP	WEIGHT (STANDARD MODEL EXC FASTENERS)	FASTENERS	FASTENER HEAD TYPE	SUPPLIED
XAS	XAS0408/1	4-8mm (5/32-5/16")	450kg (990lbs)	✓	●	-	✓	-	-	270g (9.5oz)	2 x M6 (1/4")	CSK Head	-
	XAS0408/2	4-8mm (5/32-5/16")	450kg (990lbs)	✓	●	-	-	-	-	480g (16.9oz)	4 x M6 (1/4")	CSK Head	-
	XAS0408/3	4-8mm (5/32-5/16")	450kg (990lbs)	✓	●	-	-	-	-	680g (23.8oz)	6 x M6 (1/4")	CSK Head	-
	XAS0612/1	6-12mm (5/32-1/2")	575kg (1270lbs)	✓	●	-	✓	-	-	270g (9.5oz)	2 x M6 (1/4")	CSK Head	-
	XAS0612/2	6-12mm (5/32-1/2")	575kg (1270lbs)	✓	●	-	-	-	-	500g (17.5oz)	4 x M6 (1/4")	CSK Head	-
	XAS0612/3	6-12mm (5/32-1/2")	575kg (1270lbs)	✓	●	-	-	-	-	680g (23.8oz)	6 x M6 (1/4")	CSK Head	-
XTS	XTS0610/1	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	●	✓	✓	✓	-	545g (19.1oz)	2 x M8 (5/16")	CSK Head	-
	XTS0610/2	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	●	✓	-	✓	-	1030g (36.33 oz)	4 x M8 (5/16")	CSK Head	-
	XTS0610/3	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	●	✓	-	✓	-	1500g 952.90oz	6x M8 (5/16")	CSK Head	-
	XTS0814/1	8-14mm (5/16-9/16")	1000kg (2200lbs)	✓	●	✓	✓	✓	-	545g (19.1oz)	2 x M8 (5/16")	CSK Head	-
	XTS0814/2	8-14mm (5/16-9/16")	1000kg (2200lbs)	✓	●	✓	-	✓	-	1030g (36.33 oz)	4 x M8 (5/16")	CSK Head	-
	XTS0814/3	8-14mm (5/16-9/16")	1000kg (2200lbs)	✓	●	✓	-	✓	-	1500g 952.90oz	6 x M8 (5/16")	CSK Head	-
XCS	XCS0610/1	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	○●●●●	✓	✓	✓	-	630g (22.1oz)	2 x M8 (5/16")	CSK Head	-
	XCS0610/2	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	○●●●●	✓	-	✓	-	1120g (39.5oz)	4 x M8 (5/16")	CSK Head	-
	XCS0610/3	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	○●●●●	✓	-	✓	-	1600g (56.4oz)	6 x M8 (5/16")	CSK Head	-
	XCS0814/1	8-14mm (5/16-9/16")	1200kg (2640lbs)	✓	○●●●●	✓	✓	✓	-	630g (22.1oz)	2 x M8 (5/16")	CSK Head	-
	XCS0814/2	8-14mm (5/16-9/16")	1200kg (2640lbs)	✓	○●●●●	✓	-	✓	-	1120g (39.5oz)	4 x M8 (5/16")	CSK Head	-
	XCS0814/3	8-14mm (5/16-9/16")	1200kg (2640lbs)	✓	○●●●●	✓	-	✓	-	1600g (56.4oz)	6 x M8 (5/16")	CSK Head	-
XTR	XTR0812	8-12mm (5/16-1/2")	1000kg (2200lbs)	-	○●●●●	-	✓	-	-	340g (12.0oz)	2 x M8 (5/16")	HEX or CSK	-
	XTR0812/H	8-12mm (5/16-1/2")	1000kg (2200lbs)	-	○●●●●	-	✓	-	-	365g (12.5oz)	3 x M6	POSI PAN	✓
XTX	XTX08	8mm	800kg (1764lbs)	-	○●●●●	-	-	-	✓	360g (12.07oz)	2 x M8 (5/16")	HEX or CSK	-
	XTX09	9mm	900kg (1984lbs)	-	○●●●●	-	-	-	✓	360g (12.07oz)	2 x M8 (5/16")	HEX or CSK	-
	XTX10	10mm	1000kg (2205lbs)	-	○●●●●	-	-	-	✓	365g (12.85oz)	2 x M8 (5/16")	HEX or CSK	-
	XTX11	11mm	1100kg (2425lbs)	-	○●●●●	-	-	-	✓	365g (12.85oz)	2 x M8 (5/16")	HEX or CSK	-
	XTX12	12mm	1200kg (2645lbs)	-	○●●●●	-	-	-	✓	375g (13.22oz)	2 x M8 (5/16")	HEX or CSK	-
XXA	XX0812	8-12mm (5/16-1/2")	1800kg (3970lbs)	-	●●	-	✓	✓	✓	1080g (38.1oz)	2 x M8 (5/16")	HEX, CSK or CAP	✓
XXB	XXB0812	8-12mm (5/16-1/2")	2350kg (5180lbs)	-	●●	✓	✓	✓	✓	1080g (38.1oz)	2 x M8 (5/16")	HEX, CSK or CAP	✓
XXC	XXC0812	8-12mm (5/16-1/2")	2350kg (5180lbs)	-	●●	✓	✓	✓	✓	900g (31.7oz)	2 x M8 Titanium	HEX, CSK or CAP	✓

● Black ● Dark Grey ○●●●● White, Black, Stainless Steel & Silver ●● Black & Silver ○ White & Unpainted
 ○●●●● White, Black, Amber, Blue & Yellow ○●●●● White, Black, Silver, Amber, Blue & Yellow

ROPE HOLDING COMPARISON CHART

JAMMERS - WINCH RELEASE

PRODUCT	MODEL	LINE DIA	SWL AT MAX LINE DIAMETER	MULTIPLES AVAILABLE	COLOUR	CERAMIC COATED PARTS	SIDE-MOUNT VERSION	LOCK OPEN VERSION	REMOTE OP	WEIGHT (STANDARD MODEL EXC FASTENERS)	FASTENERS	FASTENER HEAD TYPE	SUPPLIED
ZR	ZR1014	10-14mm (3/8-9/16")	1500kg (3300lbs)	-	●	-	-	-	-	394g (13.9oz)	2 x M8 (5/16")	Button Head	✓
ZXB	ZXB0812	8-12mm (5/16-1/2")	3000kg (6600lbs)	-	●●	✓	-	-	✓	675g (23.8oz)	2 x M10	CSK	✓
ZS ALLOY	ZS0810	8-10mm (5/16-3/8")	1500kg (3310lbs)	-	●	✓	✓	-	✓	750g (26.3oz)	3 x M8	Stud	✓
	ZS1214	12-14mm (7/16-9/16")	2200kg (4850lbs)	-	●	✓	✓	-	✓	1190g (41.9oz)	4 x M8	Stud	✓
	ZS1618	16-18mm (5/8-11/16")	4000kg (8820lbs)	-	●	✓	✓	-	✓	2025g (70.9oz)	6 x M10	Stud	✓
ZS CARBON	ZS1014C	10-14mm (3/8-9/16")	4000kg (8820lbs)	-	○●	✓	✓	-	✓	1024g (36.1oz)	4 x M10	Stud	✓
	ZS1618C	16-18mm (5/8-11/16")	6000kg (13230lbs)	-	○●	✓	✓	-	✓	1790g (63.1oz)	6 x M10	Stud	✓
	ZS1824C	18-24mm (11/16-15/16")	8000kg (17640lbs)	-	○●	✓	✓	-	✓	2100g (73.5oz)	10 x M10	Stud	✓
	ZS2632C	26-32mm (1-11/4")	12000kg (26460lbs)	-	○●	✓	✓	-	✓	5100g (179.9oz)	14 x M10	Stud	✓
ZS OPEN	ZS0810/OPEN	8-10mm (5/16-3/8")	1200kg (2650lbs)	-	●	-	Custom	-	-	918g (32.4oz)	N/A	N/A	N/A
	ZS1014/OPEN	10-14mm (3/8-9/16")	1800kg (3970lbs)	-	●	-	Custom	-	-	1349g (47.6oz)	N/A	N/A	N/A
	ZS1418/OPEN	14-18mm (9/16-11/16")	3200kg (7040lbs)	-	●	-	Custom	-	-	2138g (75.4oz)	N/A	N/A	N/A
	ZS1824/OPEN	18-24mm (11/16-15/16")	5200kg (11440lbs)	-	●	-	Custom	-	-	4150g (145.3oz)	N/A	N/A	N/A
	ZS2632/OPEN	26-32mm (1-11/4")	7800kg (17160lbs)	-	●	-	Custom	-	-	6100g (213.5oz)	N/A	N/A	N/A

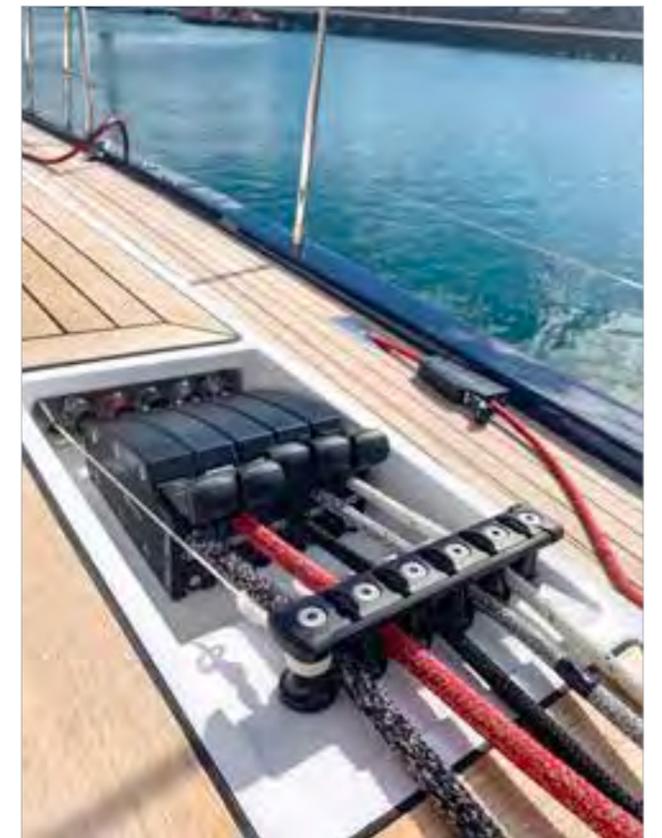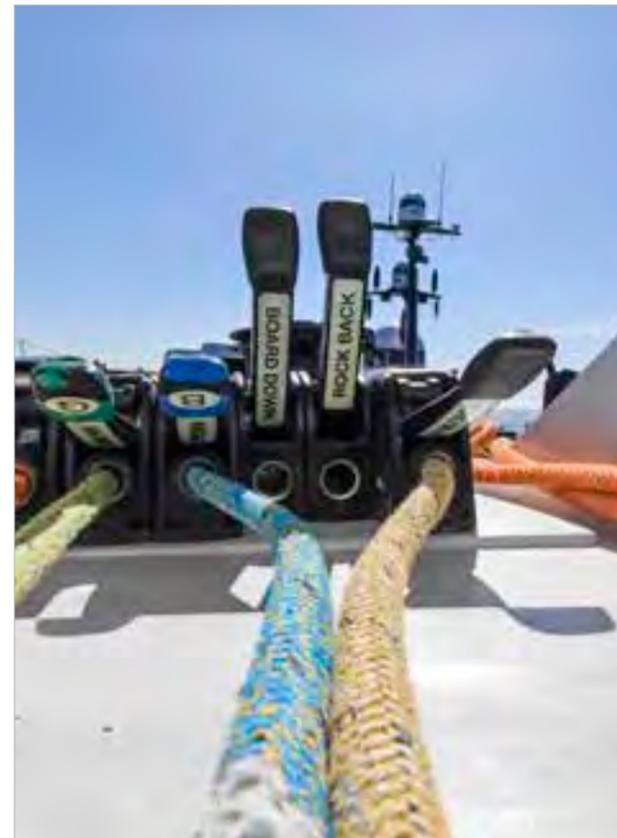

PXR CAM CLEAT THE EASIEST CLEAT TO RELEASE



Compact cam cleat for easy fast release of high performance controls and mainsheets under load


Lines 2 - 6mm (3/32 - 1/4")
Lines 6 - 10mm (5/16 - 3/8")

Loads up to 200kg (440lbs)

FEATURES

- Fast precise control for hand-tensioned lines
- Hard anodised alloy cam and base
- Ideal for high performance lines
- Micro size for small diameters
- Three stage release control switch
- Ideal for single line spinnaker hoist systems
- Resists accidental re-cleating
- Audible lock

ROPE SIZE GUIDE

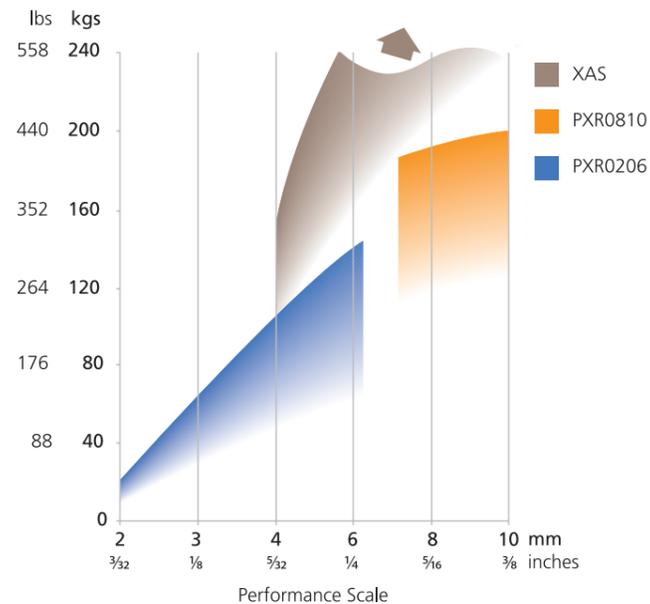

Model	Line Dia	SWL at max line dia	Break load	Weight
PXR0206	2-6mm (3/32-1/4")	140kg (308lbs)	280kg (616lbs)	43g (1.5oz)
PXR0206/SW	2-6mm (3/32-1/4")	140kg (308lbs)	280kg (616lbs)	77g (2.7oz)
PXR0206/VP	2-6mm (3/32-1/4")	140kg (308lbs)	280kg (616lbs)	97g (3.4oz)
PXR0206/T	2-6mm (3/32-1/4")	140kg (308lbs)	280kg (616lbs)	53g (1.9oz)
PXR0810	6-10mm (5/16-3/8")	200kg (440lbs)	400kg (880lbs)	84g (2.9oz)
PXR0810/SW	6-10mm (5/16-3/8")	200kg (440lbs)	400kg (880lbs)	124g (4.3oz)
PXR0810/T	6-10mm (5/16-3/8")	200kg (440lbs)	400kg (880lbs)	101g (3.5oz)

PXR CAM CLEAT THE EASIEST CLEAT TO RELEASE



RETROFIT 'T'

Matched hole centres allow direct replacement of traditional cam cleats with PXR

PXR0206/T - 27mm (1 1/16") hole centres - for upgrading dinghy control line cam cleats

PXR0810/T - 38mm (1 1/2") hole centres - for upgrading main sheet swivel cleats and traveller systems on dinghies, keelboats and yachts. Also cam cleats on downhauls, vang and backstay controls



DECK SWIVEL 'SW'

PXR0206/SW for single cleat control of jib sheets and dinghy vangs

Preferred by dinghy builders for single line spinnaker hoist systems

PXR0810/SW for bigger boat swivel cam cleat control applications

Same footprint as traditional swivel cam cleats



CENTRE PIVOT 'VP'*

Pivoting sheave and cleat - super compact design

Centrally - for feeding control lines out to the sides


Under boom - for outhaul and gnav (reverse vang) controls

At mast base - for catamaran downhauls and vangs

Easily detached

Accepts Harken sheave ref: H415

* Available for PXR0206 only

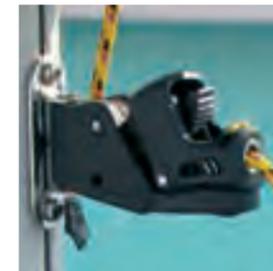

MAST BRACKET

Mast bracket for PXR0206 and PXR0810

Hard black anodised

Fits mast sections on most dinghies and keelboats up to 24ft

PXR-BRACKET





The perfect clutch for racing yachts up to 27' and cruising yachts up to 34'


Lines 4 - 12mm (5/32 - 1/2")

Loads up to 575kg (1270lbs)

FEATURES

- Superb all round performance
- High strength, soft grip ergonomic handle
- Modular design: easy to upgrade & maintain
- Effortless release
- Line-friendly grip profile
- Excellent performance across the widest rope range
- High performance, small diameter version for 4-8mm lines
- Side-mountable on either side with fairing kit XAS-SMNT

ROPE SIZE GUIDE

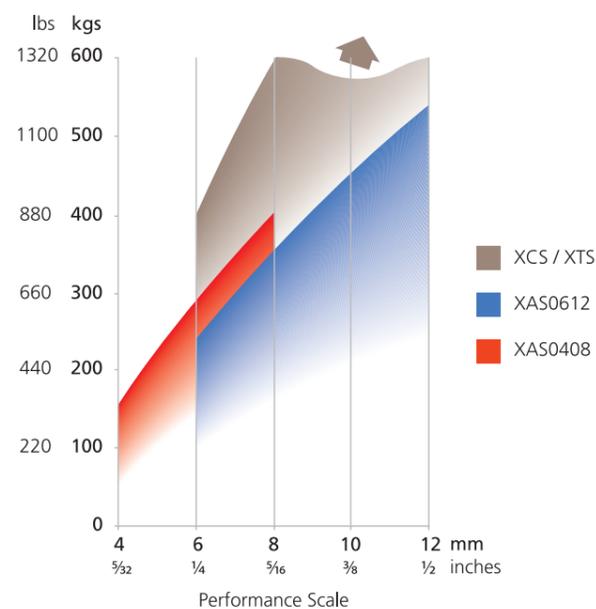

Model	Line Dia	SWL at max line diameter	Kit form for endless lines
XAS0612/1	6-12mm (1/4"-1/2")	575kg (1270lbs)	XAS0612/1M
XAS0612/2	6-12mm (1/4"-1/2")	575kg (1270lbs)	XAS0612/2M
XAS0612/3	6-12mm (1/4"-1/2")	575kg (1270lbs)	XAS0612/3M

Model	Line Dia	SWL at max line diameter
XAS0408/1	4-8mm (5/32"-5/16")	450kg (990lbs)
XAS0408/2	4-8mm (5/32"-5/16")	450kg (990lbs)
XAS0408/3	4-8mm (5/32"-5/16")	450kg (990lbs)



SMALL DIAMETER HIGH LOAD XAS0408

Optimised clutching and holding power on small diameter lines 4 - 8mm (5/32" - 5/16"). Strongly recommended for sportsboat and other small boat high performance applications. Check rope size/load graph

Regular size XAS0612 may be converted for small diameters by using base module XAS-BASE0408

XAS TIPS

Why a broad line size range is essential in your clutch

Lines often need to be switched or replaced, or smaller stronger lines fitted. A bank of clutches should never be specific to any one diameter or type of line

Leading Lines Aft

For best results with your XAS clutch installation, use model T38 deck organisers

SIDE MOUNTING AN XAS

Side mounting is usually the neatest solution for spars, side decks, and coamings and is unique to Spinlock. XAS0612/HS, XAS0612/HP

To install a single XAS on its port or starboard side, simply use the fairing kit XAS-SMNT



XTS POWERCLUTCH MID / HIGHER LOAD ROPE HOLDING



Specified as standard on larger production yachts worldwide and the choice of racing yachts inshore and offshore

Lines 6 - 14mm (1/4 - 9/16")

Loads up to 1000kg (2200lbs)



XTS0814/1



XTS0814/HP

FEATURES

- Available in single, double and triple units
- Extruded alloy handle with soft end grip
- Secure handle locking in open or closed position
- Side fairing accessory for side mounting on either side
- Two versions offer wide line diameter range
- Now available with ceramic coated cam and base for consistent holding of performance lines
- Wide range of cam upgrade options
- Easy access to fasteners
- Handle label set supplied

Model	Line Dia	SWL at max line diameter
XTS0610/1	6-10mm (1/4-3/8")	700kg (1543lbs)
XTS0610/2	6-10mm (1/4-3/8")	700kg (1543lbs)
XTS0610/3	6-10mm (1/4-3/8")	700kg (1543lbs)
XTS0610/HP	6-10mm (1/4-3/8")	700kg (1543lbs)
XTS0610/HS	6-10mm (1/4-3/8")	700kg (1543lbs)
XTS0814/1	8-14mm (5/16-9/16")	1000kg (2200lbs)
XTS0814/2	8-14mm (5/16-9/16")	1000kg (2200lbs)
XTS0814/3	8-14mm (5/16-9/16")	1000kg (2200lbs)
XTS0814/HP	8-14mm (5/16-9/16")	1000kg (2200lbs)
XTS0814/HS	8-14mm (5/16-9/16")	1000kg (2200lbs)

For ceramic versions add 'C' to end of part code

XTS SPECIAL PURPOSE CLUTCHES

Ceramic CAM and Base versions for consistent holding of modern performance lines. If upgrading to Ceramic it's important this is both CAM and BASE, available separately or as a kit for 0610 or 0814.


Continuous Line version for assembly onto the line for endless line systems

Small diameter line optimised version XTS0610


Side Mounting versions for spars, side decks and coamings

Lock-Open Cam version. When the lock is engaged the line is able to run freely in both directions until normal clutch function is needed

ROPE SIZE GUIDE

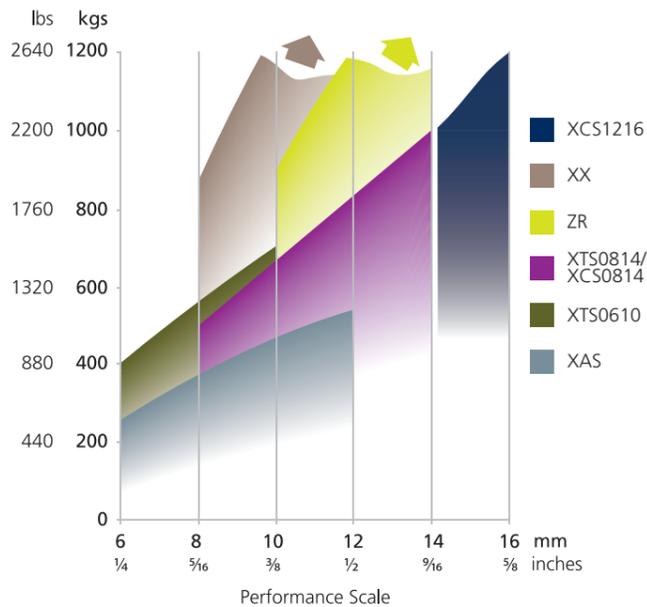

XCS POWERCLUTCH MID / HIGHER LOAD ROPE HOLDING

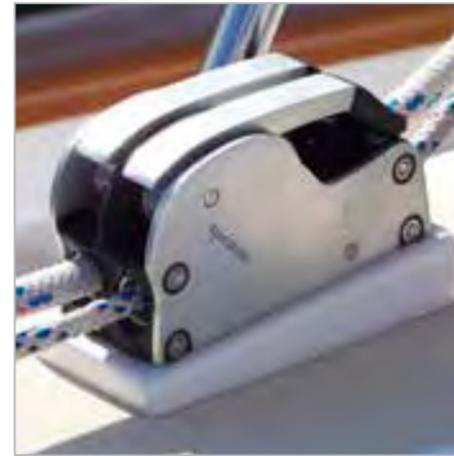

The XCS offers a range of exceptional quality finishes to match your deck or rig

Lines 6 - 16mm (1/4 - 9/16")

Loads up to 1200kg (2640lbs)



XCS0814/1S



XCS0814/2S



XCS0814/3S



XCS0814/HP

FEATURES

- XCS offers large diameter rope holding in a clutch
- Aluminium sides for sustained high load operation
- Available in white coated, black anodised or silver polished alloy to match deck, rig or other Spinlock hardware
- Mirror polished stainless steel versions also available
- Handle label set supplied
- Available in single, double and triple units
- Extruded alloy handle with soft end grip
- Secure handle locking in open or closed position
- Side fairing accessory for side mounting on either side
- Two versions offer wide line diameter range
- Now available with ceramic coated cam and base for consistent holding of performance lines
- Wide range of cam upgrade options
- Easy access to fasteners

XCS SPECIAL PURPOSE CLUTCHES

Ceramic CAM and Base versions for consistent holding of modern performance lines. If upgrading to Ceramic it's important this is both CAM and BASE, available separately or as a kit for 0610 or 0814

Large Diameter line version XCS1216

Small Diameter line optimised version XCS0610

Continuous Line version for assembly onto the line for endless line systems

Side Mounting versions for spars, side decks and coamings

Lock-Open Cam version. When the lock is engaged, the line is able to run freely in both directions until normal clutch function is needed

Stainless Steel Sided XCS/SS

Mirror polished stainless steel sided versions available in single, double and triple. Popular with classic yachts to match extensive custom on-deck stainless metal work

XCS0814/SS1, XCS0814/SS2, XCS0814/SS3

- White (W)
- Black (B)
- Stainless Steel (SS)
- Silver (S)



Model	Line Dia	SWL at max line diameter
XCS0610/1	6-10mm (1/4-3/8")	700kg (1543lbs)
XCS0610/2	6-10mm (1/4-3/8")	700kg (1543lbs)
XCS0610/3	6-10mm (1/4-3/8")	700kg (1543lbs)
XCS0814/1	8-14mm (5/16-9/16")	1000 kg (2200lbs)
XCS0814/2	8-14mm (5/16-9/16")	1000 kg (2200lbs)
XCS0814/3	8-14mm (5/16-9/16")	1000 kg (2200lbs)
XCS1216/1	12-16mm (1/2-5/8")	1200kg (2640lbs)
XCS1216/2	12-16mm (1/2-5/8")	1200kg (2640lbs)
XCS1216/3	12-16mm (1/2-5/8")	1200kg (2640lbs)

For ceramic versions add 'C' to end of part code



XTX POWERCLUTCH NEW SOFT GRIP ROPE CLUTCH RANGE



Optimised SOFTGRIP braid technology

Ropes 8 - 12mm (5/16"-1/2")

Loads up to 1200kg (2645lbs)

Weights

XTX08	360g
XTX09	360g
XTX10	365g
XTX11	365g
XTX12	375g



- 1) Pull release toggle until 'click' to latch open
- 2) Push button to hold load with SOFTGRIP Braid



REPLACEMENT GRIP ASSEMBLY

○ White (W)	● Amber (A)
● Black (B)	● Yellow (Y)
● Blue (L)	

FEATURES

- Ultra-lightweight mid-load rope holding
- Optimised SOFTGRIP braid with high performance braid anchor technology
- Gentle on rope covers - increases the lifecycle of your ropes
- Neat, retracting toggle for fingertip control of clutching power
- Controlled and consistent release across full range of loads
- Push button clutch activation with lock-open indicator
- Fully enclosed body protects against accidental release
- Small footprint and very low profile with no handle rotation space required
- Simple, versatile installation – 2 fasteners for deck, bulkhead, rig or tunnel mounting
- Remote release capability
- Easy set-up, no performance tuning required
- On-deck access for cleaning or replacing SOFTGRIP diameter

Model	Colour	Rope Dia.	SWL at max rope dia.
XTX08/A	Amber	8mm (5/16")	800kg (1764lbs)
XTX08/B	Black	8mm (5/16")	800kg (1764lbs)
XTX08/L	Blue	8mm (5/16")	800kg (1764lbs)
XTX08/W	White	8mm (5/16")	800kg (1764lbs)
XTX08/Y	Yellow	8mm (5/16")	800kg (1764lbs)
XTX09/A	Amber	9mm (max 3/8")	900kg (1980kg)
XTX09/B	Black	9mm (max 3/8")	900kg (1980kg)
XTX09/L	Blue	9mm (max 3/8")	900kg (1980kg)
XTX09/W	White	9mm (max 3/8")	900kg (1980kg)
XTX09/Y	Yellow	9mm (max 3/8")	900kg (1980kg)
XTX10/A	Amber	10mm (3/8")	1000kg (2205lbs)
XTX10/B	Black	10mm (3/8")	1000kg (2205lbs)
XTX10/L	Blue	10mm (3/8")	1000kg (2205lbs)
XTX10/W	White	10mm (3/8")	1000kg (2205lbs)
XTX10/Y	Yellow	10mm (3/8")	1000kg (2205lbs)
XTX11/A	Amber	11mm (7/16")	1100kg (2425kg)
XTX11/B	Black	11mm (7/16")	1100kg (2425kg)
XTX11/L	Blue	11mm (7/16")	1100kg (2425kg)
XTX11/W	White	11mm (7/16")	1100kg (2425kg)
XTX11/Y	Yellow	11mm (7/16")	1100kg (2425kg)
XTX12/A	Amber	12mm (1/2")	1200kg (2645lbs)
XTX12/B	Black	12mm (1/2")	1200kg (2645lbs)
XTX12/L	Blue	12mm (1/2")	1200kg (2645lbs)
XTX12/W	White	12mm (1/2")	1200kg (2645lbs)
XTX12/Y	Yellow	12mm (1/2")	1200kg (2645lbs)

Replacement braids

XTX-GRIP08	Replacement grip assembly for 8mm line
XTX-GRIP09	Replacement grip assembly for 9mm line
XTX-GRIP10	Replacement grip assembly for 10mm line
XTX-GRIP11	Replacement grip assembly for 11mm line
XTX-GRIP12	Replacement grip assembly for 12mm line

XTR POWERCLUTCH MID / HIGHER LOAD ROPE HOLDING




FEATURES

- Superb mid load holding performance
- 'Reactive Clutching' - line holding is consistent and fast across the full diameter range - release is smooth and progressive
- Offers significant rope holding improvement on the latest small diameter rope types
- Ultra lightweight alloy/composite construction
- Handle lifts to ergonomic position for release
- Reactor cam module is easily removed for on-deck cleaning and servicing
- Single units only
- Side mount versions available
- One person installation



Model	Description	Line Dia	SWL at max line dia
XTR Powerclutch			
XTR0812/B	Black	8-12mm (5/16-1/2")	1000kg (2200lbs)
XTR0812/S	Silver	8-12mm (5/16-1/2")	1000kg (2200lbs)
XTR0812/W	White	8-12mm (5/16-1/2")	1000kg (2200lbs)
XTR0812/A	Amber	8-12mm (5/16-1/2")	1000kg (2200lbs)
XTR0812/L	Blue	8-12mm (5/16-1/2")	1000kg (2200lbs)
XTR0812/Y	Yellow	8-12mm (5/16-1/2")	1000kg (2200lbs)
XTR Powerclutch, Sidemount (PORT or STBD)			
XTR0812/HB	Black	8-12mm (5/16-1/2")	1000kg (2200lbs)
XTR0812/HS	Silver	8-12mm (5/16-1/2")	1000kg (2200lbs)
XTR0812/HW	White	8-12mm (5/16-1/2")	1000kg (2200lbs)
XTR0812/HA	Amber	8-12mm (5/16-1/2")	1000kg (2200lbs)
XTR0812/HL	Blue	8-12mm (5/16-1/2")	1000kg (2200lbs)
XTR0812/HY	Yellow	8-12mm (5/16-1/2")	1000kg (2200lbs)

ROPE SIZE GUIDE

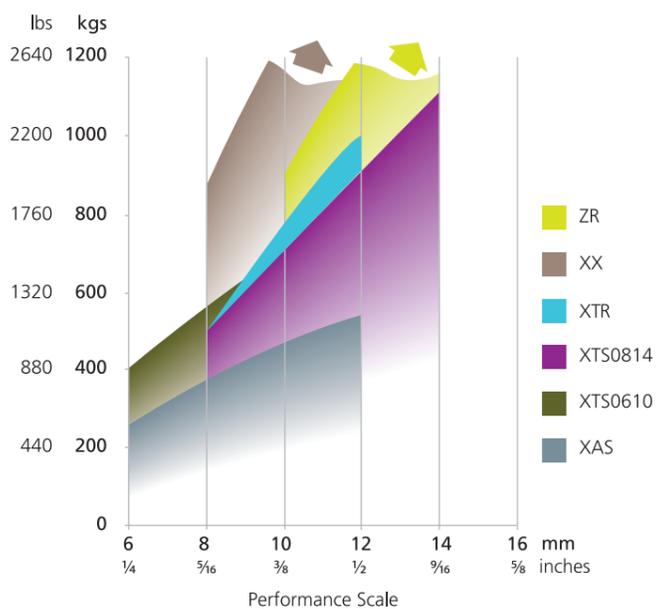

ZR JAMMER MID / HIGHER LOAD WINCH RELEASE JAMMER



Secure 'hands free' jammer technology for production yachts

Lines 10 - 14mm (3/8 - 9/16")
Loads up to 1500kg (3300lbs)


(A) ZR Grip Switch 'on' One way 'Jamming' action: the loaded line cannot be released until primed and the load is taken on the winch

(B) ZR Grip Switch 'off' Primed for winch release: jaws latch open the instant load transfers to the winch

FEATURES

- Controlled release action: always safely from the winch
- Holds three line sizes 10mm, 12mm and 14mm
- Holds 50% more line load than XTS/XTR clutch
- ZR Jammer can be primed for release using the GRIP switch
- Easy access fastener holes
- High tensile fasteners (M8 x 60mm A4-70), nuts and washers supplied
- Replaceable jaw cartridge accessed with a single screw
- Self-sealing deck fastening
- Can be configured for remote use
- Footprint matched to XX allows simple upgrade for higher loads or release functionality
- Single units only

ROPE SIZE GUIDE

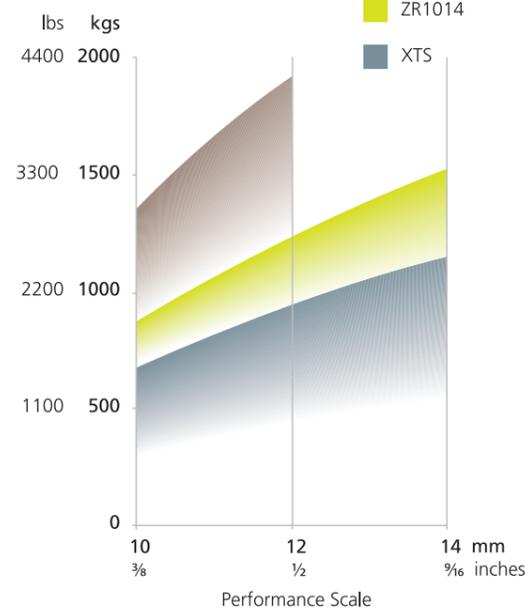

Model	Line Dia	SWL at max line diameter
ZR1014	10-14mm (3/8-9/16")	1500kg (3300lbs)

XX SERIES - XXA, XXB & XXC POWERCLUTCH

SECURE CLUTCHING FOR HIGH LOADS



The only secure clutch solution for performance yachts

Lines 8 - 12mm (5/16 - 1/2")

XXA Loads up to 1800kg (3970lbs)
XXB Loads up to 2350kg (5180lbs)
XXC Loads up to 2350kg (5180lbs)

FEATURES - XX SERIES

Latest jaw technology for consistent holding of performance ropes
Optimised for high performance 8-12mm (5/16-1/2") line diameters
Smooth controlled release action

One piece jaw set is easy to remove and clean

Access ports for fresh water flushing

Line height optimised for correct lead to winch and side mounting

Holds lines up to a massive 2350kg (5180lbs) working load

Side mount version

Ceramic jaws offer consistent holding of blended ropes and extended jaw life (XXB/XXC)

Internal Torlon roller bearings ensure lasting performance and durability under high loads (XXB/XXC)

Remote operation, handle free option


Lock Open feature allows lines to run through freely with handle closed; for applications such as mainsheets and spinnaker sheets

Allows structural integration and jammer style operation (release using winch)

Black or silver anodised (all models)

Custom finishes available

ROPE SIZE GUIDE

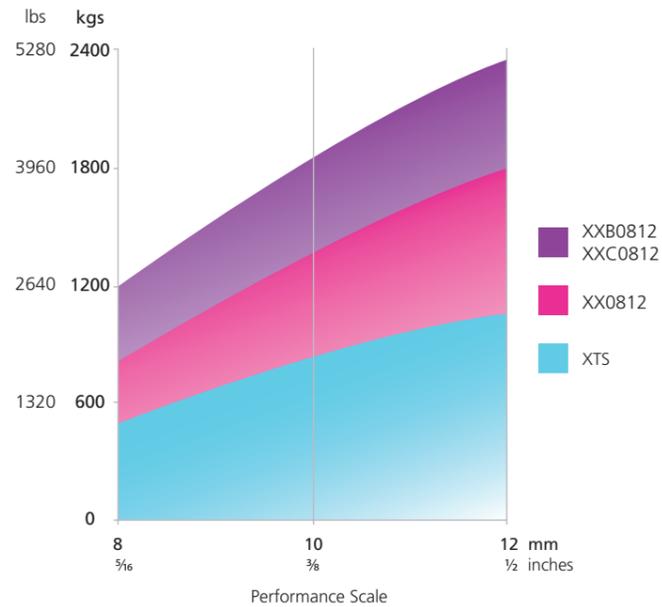

XX SERIES

SECURE CLUTCHING FOR HIGH LOADS

	XXA	XXB	XXC
WEIGHT	1100g	1100g	900g
MAX WORKING LOAD	1800Kg	2350Kg	2350Kg
ANODISED JAWS	✓	-	-
CERAMIC JAWS	-	✓	✓
TORLON ROLLER UPGRADE	-	✓	✓
TITANIUM COMPONENTS	-	-	✓
LIGHTWEIGHT MACHINED HANDLE	-	-	✓
ULTRA LIGHTWEIGHT MACHINED BODY	-	-	✓

STANDARD	BLACK ANODISED	●	XX0812	XXB0812	XXC0812
	SILVER ANODISED	○	XX0812/S	XXB0812/S	XXC0812/S
SIDE MOUNT PORT	BLACK	●	XX0812/HP	XXB0812/HP	XXC0812/HP
	SILVER	○	XX0812/HPS	XXB0812/HPS	XXC0812/HPS
SIDE MOUNT STARBOARD	BLACK	●	XX0812/HS	XXB0812/HS	XXC0812/HS
	SILVER	○	XX0812/HSS	XXB0812/HSS	XXC0812/HSS
LOCK OPEN	BLACK	●	XX0812/L	XXB0812/L	XXC0812/L
	SILVER	○	XX0812/LS	XXB0812/LS	XXC0812/LS
REMOTE	BLACK	●	XX0812/R	XXB0812/R	XXC0812/R
	SILVER	○	XX0812/RS	XXB0812/RS	XXC0812/RS



ZXB POWERJAMMER NEW JAMMER TECHNOLOGY



New Jammer using aerospace technology for super strong construction, with higher performance for lowest weight and deck footprint

Lines 8 - 12mm (5/16 - 1/2")

Loads up to 3000kg

Product Weight 675kg

Fasteners MK10 CSK

- Black (B)
- Silver (S)

FEATURES

ZXB0812 Jammer - Lines 8-12mm and loads up to 3000kg

Lightweight high strength aluminium body formed as a monocoque structure

Use of aerospace technology has reduced the size and weight by a massive 40%

Very low profile body - smaller product for the load holding

Very low pull through friction

Low maintenance PTFE bearings

Lightweight, ceramic jaws for ultimate high load performance and resistance to heat and abrasion

Clip-on jaw grips for easy replacement ensure lower cost and weight, important for long life and less waste

Toggle and button latching mechanism - replacing traditional exposed handle

Easy to operate from various positions

Remote operation compatible

Simple to view on/off status of the jammer

Easy on deck servicing and maintenance


Model	Description	Line Dia	SWL at max line dia
ZXB0812	ZXB Jammer, Black	8-12mm (5/16 - 1/2")	3000kg (6614lbs)

SPARES

Part	Description
ZXB-KIT12	ZXB Jammer replacement Jaws, Bearings, Rear Cover and Toggle/Latch Assembly
ZXB-BRG12	ZXB Jammer 8-12mm PTFE Bearings
ZXB-MLDG12	ZXB Jammer 8-12mm Moulding Se



ZS ALLOY POWERJAMMER JAMMER FOR HIGH LOADS

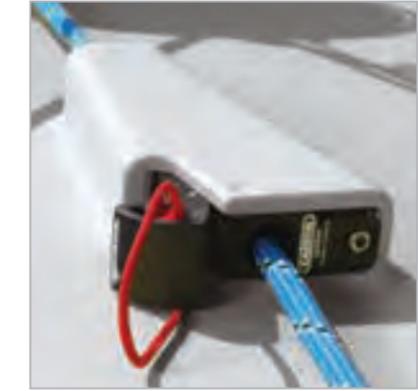

Unrivalled performance for larger diameters and high loads with winch-controlled release

Lines 8 - 18mm (5/16 - 11/16")

Loads up to 4000kg (8820lbs)

FEATURES

Digitally modelled jaw surfaces hold high tech rope securely at it's safe working load

Excellent performance on smaller diameter lines


Easy on-deck service access

Carbon versions available with lightweight, super strength body

Side mount using existing holes in jammer body

Ceramic coated jaws option offers consistent holding of blended covered ropes


ROPE SIZE GUIDE

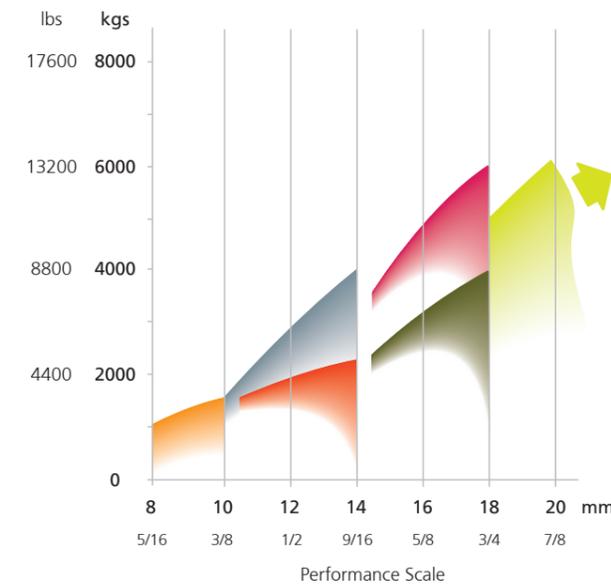

- ZS1824 C
- ZS1014 B/C
- ZS1618 B/C
- ZS1214
- ZS1618
- ZS0810

Model	Line Dia	SWL at max line dia	Weight
ZS0810	8-10mm (5/16-3/8")	1500kg (3310lbs)	750g (26.3oz)
ZS1214	12-14mm (7/16-9/16")	2200kg (4850lbs)	1190g (41.7oz)
ZS1618	16-18mm (5/8-11/16")	4000kg (8820lbs)	2025g (70.9oz)

CUSTOM OPTIONS



BONDED




HANDLE PRINTING



CUSTOM FINISH

ZS CARBON POWERJAMMER

LIGHTWEIGHT JAMMER FOR HIGH LOADS

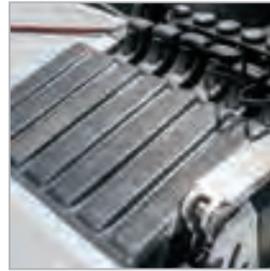

ZS Carbon Jammers for ultimate load holding and minimum product weight

Lines 10 - 32mm (3/8 - 1 1/4")

Loads up to 12000kg (26460lbs)

FEATURES

ZS Carbon Jammers are supplied with high tensile fasteners for standard mounting. ZS Carbon Jammers can be vertically or side mounted on masts. Custom mounting plates are available for each jammer

Can be set up for remote operation using ZS-RLB (see page 23)

Supplied white painted as standard. Custom finishes and unpainted product also available

ZS Bonded Series

Smaller and lighter than standard models, supplied unpainted for direct bonding. Applications include foredeck tack control lines and remote release locks, bonded to mast and booms

UPGRADES AND SPARES

ZS 'P' Series	For use in:
ZS-JAW08	ZS0810
ZS-JAW12	ZS1214 and ZS1014C
ZS-JAW16	ZS1618 and ZS1618C
ZS-JAW18	ZS1824C

ZS 'HC' Series	For use in:
ZS-JAW08HC	ZS0810
ZS-JAW12HC	ZS1214 and ZS1014C
ZS-JAW16HC	ZS1618 and ZS1618C
ZS-JAW18HC	ZS1824C

Part	Description
ZS-JAW16-12	Line reducing kit for ZS1618 Alloy 'P-Series' Digital Jaw Assembly (PTFE Sliders)
ZS-JAW16-12/B	Line reducing kit for ZS1618B 'P-Series' Digital Jaw Assembly (PTFE Sliders)
ZS-JAW16-12/C	Line reducing kit for ZS1618C 'P-Series' Digital Jaw Assembly (PTFE Sliders)
ZS-JAW16-12HC	Line reducing kit for ZS1618 Alloy 'H' CERAMIC Series Digital Jaw Assembly (PTFE sliders)
ZS-JAW16-12HC/B	Line reducing kit for ZS1618B 'H' CERAMIC Series Digital Jaw Assembly (PTFE sliders)
ZS-JAW16-12HC/C	Line reducing kit for ZS1618C 'H' CERAMIC Series Digital Jaw Assembly (PTFE sliders)
ZS-JAW18-12	Line reducing kit for ZS1824 Carbon Jaw Assembly (PTFE sliders)
ZS-JAW18-12C	Line reducing kit for ZS1824 Carbon CERAMIC Series Digital Jaw Assembly (PTFE sliders)

ZS 'P' SERIES JAWS

ZS Jammers are supplied as standard with 'P' Series Jaws which are for use with Dyneema core and polyester cover ropes and are generally used in ZS Alloy Jammers

ZS CERAMIC 'HC' SERIES JAWS

Ceramic Jaws are specially designed for ropes with blended covers: polyester with high-tech fibres such as Aramid, Technora, Codura or Vectran

ZS 'HC' Series Jaws have enhanced grip detail with ceramic coating to resist the polishing and wear caused by loaded rope at high line speed, allowing for faster engagement onto highly loaded line and improving load holding performance

ZS JAW REDUCING KITS

ZS Jaw reducing kits allow for conversion of larger jammers to smaller line sizes

Model	Line Dia	SWL at max line dia	Weight
ZS1014C	10-14mm (3/8-9/16")	4000kg (8820lbs)	1024g (36.2oz)
ZS1014B	10-14mm (3/8-9/16")	4000kg (8820lbs)	630g (22.2oz)
ZS1618C	16-18mm (5/8-11/16")	6000kg (13230lbs)	1390g (49.0oz)
ZS1618B	16-18mm (5/8-11/16")	6000kg (13230lbs)	910g (32.1oz)
ZS1824C	18-24mm (11/16-15/16")	8000kg (17640lbs)	2100g (73.5oz)
ZS2632C	26-32mm (1-1/4")	12000kg (26460lbs)	5100g (179.9oz)

PD CARBON PADEYES

STRONG POINT



Model	SWL Vertical (kg)	SWL 45 (kg)	SWL Horizontal (kg)
PD/6C	2150	1290	1290
PD/8C	4000	2400	2400
PD/10C	7600	5250	5250
PD/12C	9750	6750	6750

FEATURES

Carbon deck and backing plates

High quality 17-4PH stainless steel

Excellent strength to weight ratio

Increased through laminate bearing surfaces to minimise tearing

Significantly reduced weight to previous padeye range

Improved shock loading resistance

Compact foot print and the ability to 'nest' together

Easily sealed

ZS OPEN POWERJAMMER

MOBILE HIGH LOAD JAMMER



ZS0810/OPEN

The essential solution for peeling spinnakers, headsails and reefing. Unbeatable in an emergency

Lines 8 - 32mm (5/16 - 1 1/4")

Loads up to 7800kg (17190lbs)

FEATURES

Easily attached to any strong point with a strop

Hinged body can be opened and closed like a snatch-block

Acts as an emergency line clamp in case of winch or other hardware failure, jammed halyards, riding turns or damaged lines

Frees a winch for a sail change

Custom options include rig or deck mounting holes

Model	Line Dia	SWL at max line diameter
ZS0810/OPEN	8-10mm (5/16-3/8")	1200kg (2650lbs)
ZS1014/OPEN	10-14mm (3/8-9/16")	1800kg (3970lbs)
ZS1418/OPEN	14-18mm (9/16-11/16")	3200kg (7040lbs)
ZS1824/OPEN	18-24mm (11/16-15/16")	5200kg (11440lbs)
ZS2632/OPEN	26-32mm (1-1/4")	7800kg (17160lbs)

ZS-RLB REMOTE RELEASE

REMOTE OPERATION OF ZS JAMMERS



FEATURES

ZS-RLB and ZS-RLB/L Remote Release Switch

1. Lock ZS-RLB switch in forward 'locking position' - the line is loaded or ready for load

2. Pre-set - with the line under load the ZS-RLB switch is rotated to the 'unlock' position - this pre-tensions the trip line ready for release

3. Fire - load on the line is taken on a winch and ZS Jaws spring to the open position. The load can now be released from the winch, to run freely through the ZS

For use with ZS0810, ZXB0812, ZS1214, ZS1014C, ZS1618 and ZR1014 jammers, all supplied configured for trip line attachment and lead

Allows the jammer to be pre-tensioned to release automatically, when the load is taken on the winch

For use with ZS0810, ZXB0812, ZS1214, ZS1014C, ZS1618 and ZR1014 jammers

TSR FULLY CUSTOMISABLE ORGANISER FOR LEADING HIGHLY LOADED LINES



TSR ORGANISER


Aft Organiser for diverting lines from clutches and jammers

TSR LOW SHEAVE ORGANISER

Forward Organiser for diverting high loaded lines

FEATURES

- 20mm and 30mm diameter alloy sheaves
- 30mm sheaves for diverting large deflection angles and large diameter lines
- All rotating sheaves with plain bearings
- Alloy top rails
- Modular design and assembly – sheaves can be moved to any spacing
- Sheave diameters can be optimised for each application
- Tulip shaped design reduces friction from vertical deflection
- Low profile design
- Simple inserting and removal of endless lines
- Central shaft designed to spread load through laminate
- Titanium parts available to further reduce weight
- Custom sheave spacing and Spinlock design service available

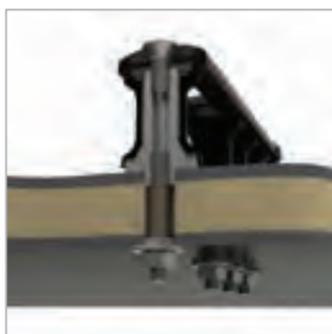

TSR FULLY CUSTOMISABLE ORGANISER FOR LEADING HIGHLY LOADED LINES

SHEAVE DIAMETER MM	20 MM	30 MM	20 MM	30 MM	44 MM
SHEAVE HEIGHT	LOW	LOW	STANDARD	STANDARD	STANDARD
NUMBER OF SHEAVES					
2	TSR20L/2	TSR30L/2	TSR20/2	TSR30/2	*
3	TSR20L/3	TSR30L/3	TSR20/3	TSR30/3	*
4	TSR20L/4	TSR30L/4	TSR20/4	TSR30/4	*
5	TSR20L/5	TSR30L/5	TSR20/5	TSR30/5	*
6	TSR20L/6	TSR30L/6	TSR20/6	TSR30/6	*
7	TSR20L/7	TSR30L/7	TSR20/7	TSR30/7	*
8	TSR20L/8	TSR30L/8	TSR20/8	TSR30/8	*
9	TSR20L/9	TSR30L/9	TSR20/9	TSR30/9	*
10	TSR20L/10	TSR30L/10	TSR20/10	TSR30/10	*
11	CONTACT SPT@SPINLOCK.CO.UK				

* CONTACT OUR SPECIAL PROJECTS TEAM FOR:

- Custom sheave spacing (at no additional cost)
- Large organisers up to 1m / 25 sheaves
- Very high load organisers with 44mm sheaves
- Titanium options available
- Custom sheave combinations

SPT@SPINLOCK.CO.UK

TSF ENDLESS LINE ORGANISER

High load Organiser with opening access




Organiser with opening access for endless lines where code sails will be removed from deck

- 20mm diameter alloy sheaves
- Sheave height reduced to maximise sheave load
- Very low profile design
- All rotating sheaves with plain bearings
- Alloy top plate






TSR ORGANISER FOR LEADING HIGHLY LOADED LINES

TSR20

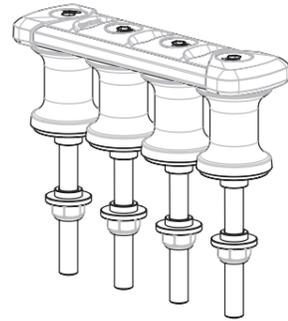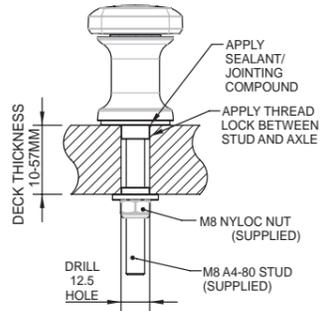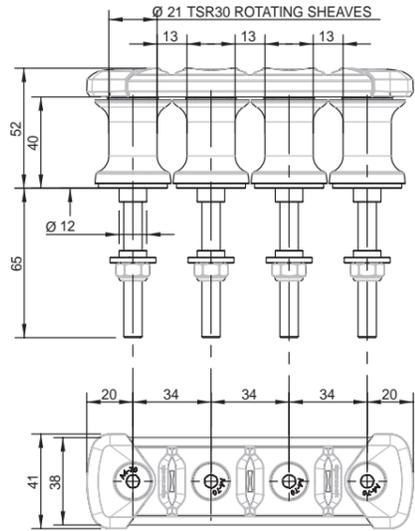




Sheave spacing: Standard product sheave spacing shown
Custom spacing available in 1.0mm increments at no additional cost

TSR20L

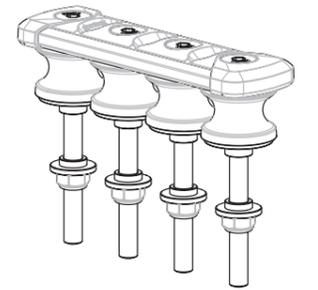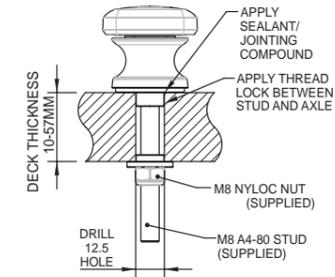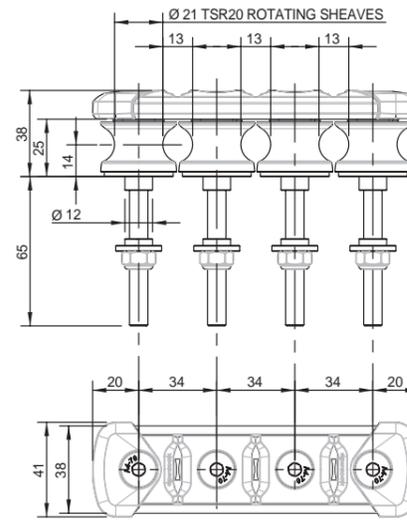




Sheave spacing: Standard product sheave spacing shown
Custom spacing available in 1.0mm increments at no additional cost

TSR30

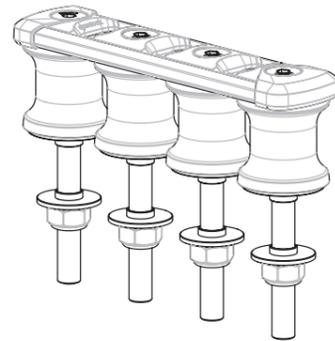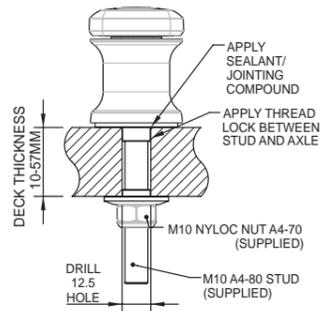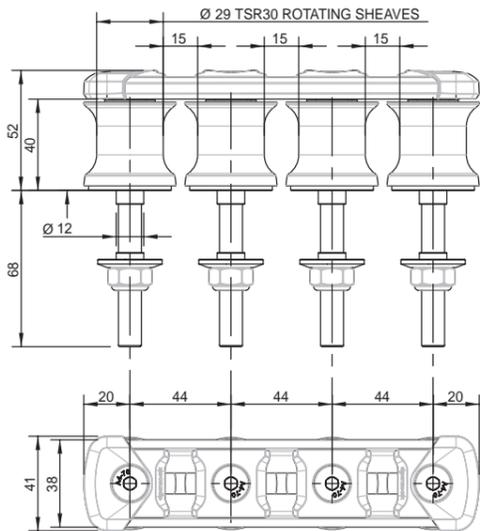

Sheave spacing: Standard product sheave spacing shown
Custom spacing available in 1.0mm increments at no additional cost

TSR30L

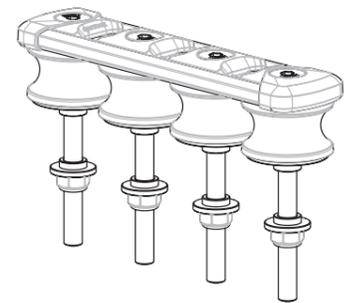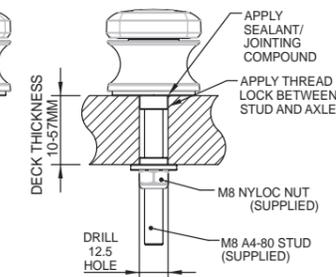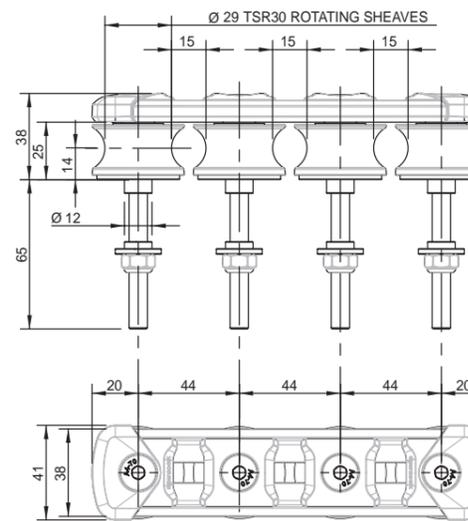

Sheave spacing: Standard product sheave spacing shown
Custom spacing available in 1.0mm increments at no additional cost

When to use Titanium?

Specify titanium when weight saving is premium


When to use low sheave TSRL?

Use low sheave versions where space is restricted such as in-deck tunnel systems and mast bases


When to use larger diameter 30mm sheaves?

Use 30mm sheaves for diverting highly loaded lines, diverting large deflections and large diameter lines

Maximum Loads	TSR20 & TSR20L
SHEAVE LOAD	1500kg
TOTAL COMBINED SHEAVE LOAD	750kg x number of sheaves
30° DEFLECTED ROPE LOAD	3000kg
60° DEFLECTED ROPE LOAD	1500kg

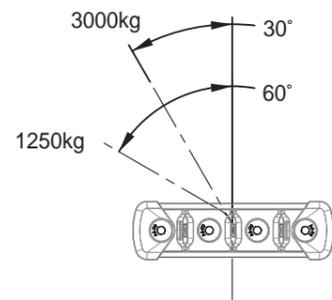

Maximum Loads	TSR30 & TSR30L
SHEAVE LOAD	2500kg
TOTAL COMBINED SHEAVE LOAD	1250kg x number of sheaves
30° DEFLECTED ROPE LOAD	5000kg
60° DEFLECTED ROPE LOAD	2500kg

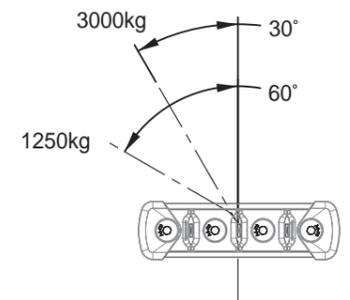

TWR SHEAVE RANGE


LOW PROFILE, HIGH LOAD DIVERTER



Our TWR Organiser is a development of our successful TSR Organiser Range, offering a high load, single line diverter for lines up to a massive 2.5 tonnes.

FEATURES

- Single sheave in 30mm and 44mm diameter
- Low profile design with minimal friction from vertical deflection
- Full rotating sheave with faired-in top plate
- 2.5 tonnes maximum sheave load
- Simple on-deck servicing
- Central shaft designed to spread load through laminate
- Titanium parts available to further reduce weight
- Competitively priced

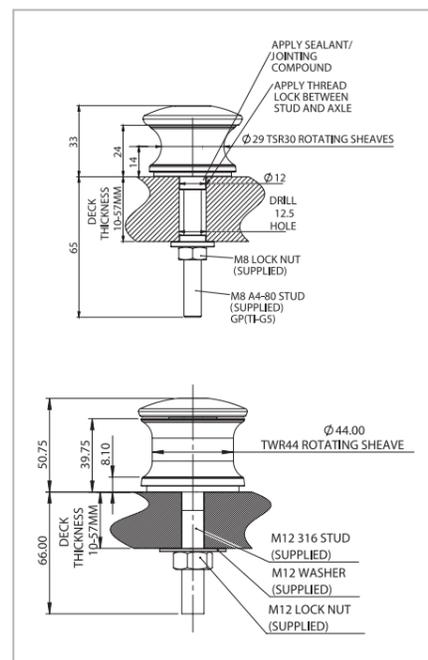

Model	Description	SWL	Max Line Dia
TWR/30	Single 30mm sheave	2000kg	16mm
TWR/44	Single 44mm sheave	2500kg	24mm

T25 ORGANISER

FOR LEADING LINES



FEATURES


- Fibre-reinforced construction
- Stainless steel 'wear strip' prevents local rope damage
- Symmetric or asymmetric configurations with full range of sheaves
- Stainless steel unlinked base for fitting on curved surfaces which simplifies deck sealing
- Double stack with BE10/2 or BE10/3 for leading additional lines
- Small boat organiser



Model	Sheave Dia/Type	SWL per sheave	Total SWL per unit	Line Dia	Fastener
T25	25mm (1") composite	400kg (880lbs)	No of sheaves x 200kg (440lbs)	10mm (3/8")	M5 CSK (3/16")

TWF WINCHFEEEDER

FOR DIVERTING LINES

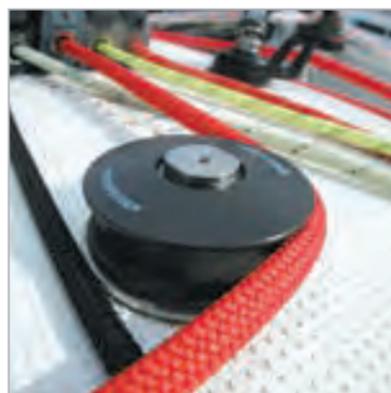

FEATURES

- Fit a winchfeeder aft of a clutch or jammer to divert lines to an alternative winch
- Useful for leading a line from a clutch on one side to an alternative winch
- Very low 25mm (1") profile keeps winchfeeders safely out of the traffic



Model	Sheave Dia / Type	SWL per sheave	Max Line Dia
TWF/50M	50mm (2") Alloy	800kg (1760lbs)	12mm (1/2")
TWF/63M	63mm (2 1/2") Alloy	1000kg (2200lbs)	12mm (1/2")

BE10 MULTIPLE BULLSEYE

FOR STAND ALONE OR USE WITH T25 ORGANISERS



FEATURES

- Versatile new solution for low loaded lines; either fitted alone or double stacked onto new T25 organisers
- Integral stainless steel eye construction
- Grouped format minimises the deck space for multiple lines
- Shape deflects easily to fit concave or convex surfaces
- BE10/2s and 3s stack anywhere on the T25 organiser providing a very neat new rope management solution



For Single Bullseye See page 37

Model	Description
BE10/2	Double 10mm bullseye
BE10/3	Triple 10mm bullseye

T38, T50 & TC50 ORGANISERS FOR LEADING LINES



T-Series Organisers guide multiple lines from the mast to banks of clutches or jammers

Lines up to 14mm (9/16")

Loads up to 1500kg (3300lbs)



FEATURES

Minimal overall length

Efficient bearings surface reduces winch effort and increases halyard life

Integral end fairings for safe side loading


Asymmetric version reduces deck footprint and saves weight

T38 and T50 can 'stack' for limited deck area or adding extra capacity. T50 will also 'stack' on TC50

Vari-camber feature: all T38 and T50 versions are designed to follow the curve of the deck when fitted

TC50 Organisers are specially developed for higher loads

Model	Sheave Dia/ Type	SWL per sheave	Total SWL per unit	Max Line Dia
T38	38mm (1 1/2") composite	600kg (1320lbs)	No of sheaves x 300kg (660lbs)	12mm (1/2")
T50	50mm (2") composite	1000kg (2200lbs)	No of sheaves x 500kg (1100lbs)	14mm (9/16")
TC50	50mm (2") alloy	1500kg (3300lbs)	No of sheaves x 750kg (1650lbs)	14mm (9/16")
TC50/D	50mm (2") alloy	1000kg upper (2200lbs) 1500kg lower (3300lbs)	No of sheaves x 500kg (1100lbs) No of sheaves x 750kg (1650lbs)	14mm (9/16")

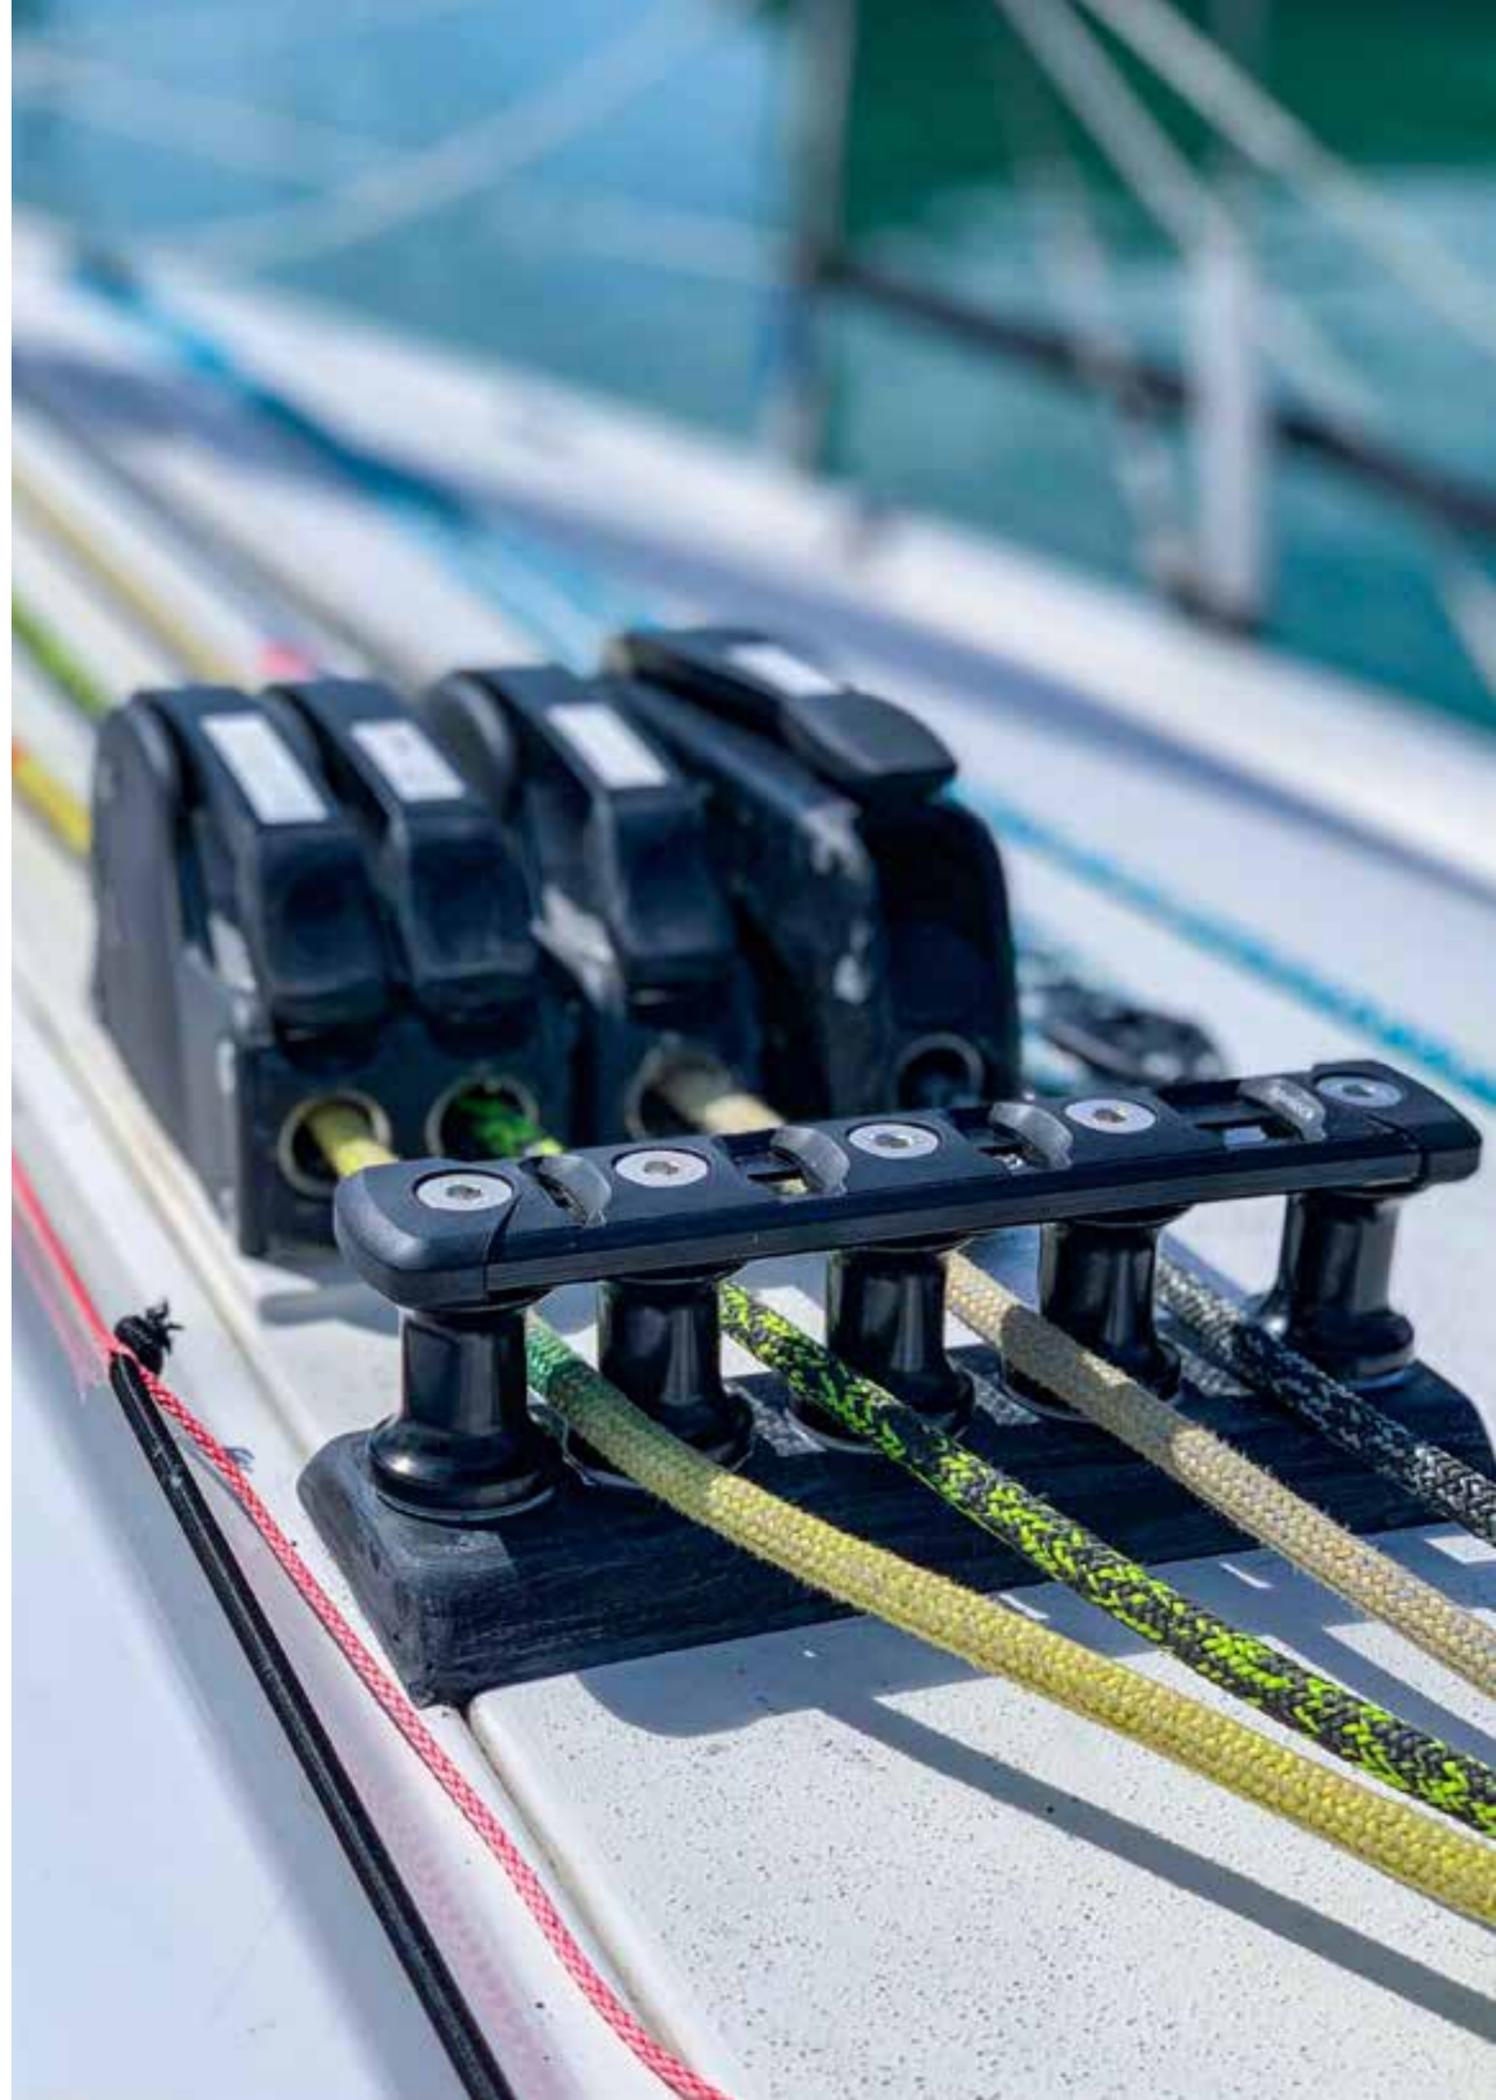




EAC CARBON TILLER EXTENSION ULTIMATE LIGHTWEIGHT STEERING CONTROL

FEATURES

- Featherlight in the hand
- Ultimate responsive helm feel
- Spinlock's iconic handle shape for fingertip control
- Lightweight carbon-fibre componentry
- Single piece integrated carbon handle and inner tube
- All parts detailed for minimum weight
- Maximum use of carbon and titanium parts
- Protective zipped bag included
- Titanium E-Joint GP with fast-pin for easy removal when not in use
- Satin clearcoat finish
- Available in 900, 1200, 1600 and 2000 lengths
- Custom paint finishes available
- Special order only





Model	Description	Weight
EAC/900	Ultra Lightweight Full Carbon Tiller Extension (600-900mm)	299g (10.55oz)
EAC/1200	Ultra Lightweight Full Carbon Tiller Extension (750-1200mm)	339g (11.96oz)
EAC/1600	Ultra Lightweight Full Carbon Tiller Extension (950-1600mm)	406g (14.32oz)
EAC/2000	Ultra Lightweight Full Carbon Tiller Extension (1350-2000mm)	461g (16.26oz)

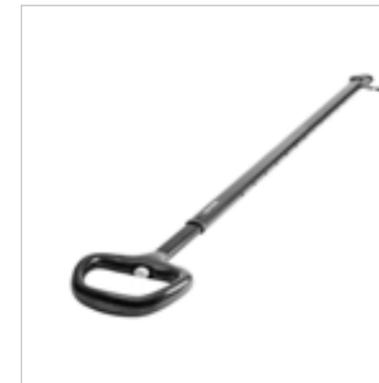


E-DIABOLO E-DIABOLO/J

Convert or replace Spinlock tiller extensions with a Diabolo universal joint. Returns the extension to a vertical position when not in use

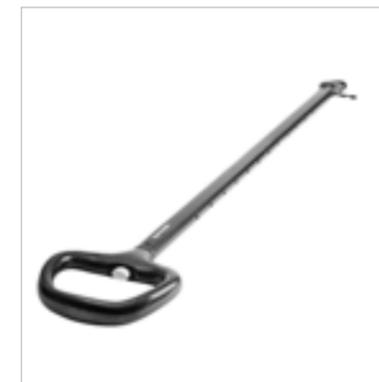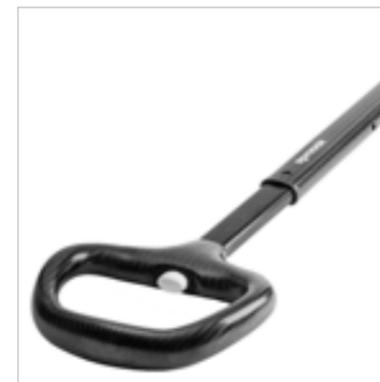

Full Swivel E-Joint with Fastpin: E-JOINT

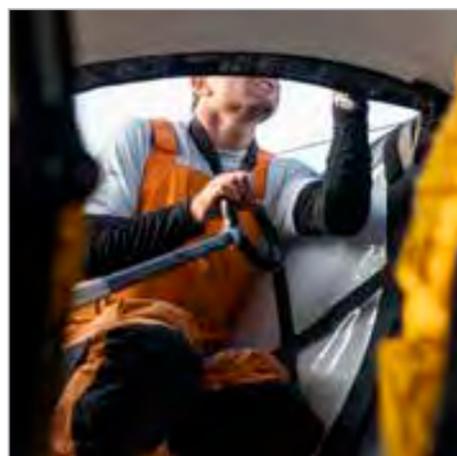

Compact telescopic extensions shaped for precision helming

FEATURES

Straight Handle (EJ) or Oval Handle (EA) Telescopic in four standard lengths

Designed for the hardest conditions; to reduce the strain and increase the sheer enjoyment of helming

The Asymmetric grip improves helming performance with:

- More feedback - for accurate and precise control
- More mobility - maintains the best helming position for optimum trim and visibility
- Less fatigue - correct helming position reduces back pain and improves concentration
- Allows two-handed helming with arms relaxed into a more comfortable, elbows-down position

Push-button adjustment with Torlon™ ball locking mechanism

Strong stainless-steel swivel joint for precise control

Removable fast pin for easy stowage

Integral shock absorber

Choose EJ Tiller extension for a slimmer grip and for the smaller cockpit - ideal for hiking and fast tacking

EJ-GRIP can be upgraded to Asymmetric handle (EA) specification or vice-versa

DIABOLO VERSION

The Diabolo version is preferred by single-handed yachtsmen. A windsurfing-style universal joint returns it to a vertical position when not in use. Ideal for boats predominantly tiller steered by autopilot

Convert or replace Spinlock tiller extensions with a Diabolo universal joint. Returns the extension to a vertical position when not in use

Model	Description
E-DIABOLO	Tiller Extension Universal Diabolo Joint
E-DIABOLO/J	Tiller Extension Universal JUMBO Diabolo Joint



- Matt Black (B)
- Silver (S)
- Matt Orange (R)
- Matt Light Blue (L)
- Matt Yellow (Y)
- Satin Clearcoat Carbon

SIZES

- 900 Series (600-900mm)
- 1200 Series (750-1200mm)
- 1600 Series (950-1600mm)
- 2000 Series (1350 - 2000mm)



E-DIABOLO & E-DIABOLO/J



E-BUTTON controls telescopic adjustment



E-JOINT

PRODUCT		EA ASYMMETRIC		EJ JOYSTICK		EAC CARBON
CONNECTION		E-JOINT (STAINLESS STEEL)	E-DIABOLO	E-JOINT (STAINLESS STEEL)	E-DIABOLO	E-JOINT (TITANIUM)
3D OVAL HANDLE		✓	✓	-	-	✓
STRAIGHT FOAM GRIP HANDLE		-	-	✓	✓	-
E-GRIP		OPTIONAL	-	OPTIONAL	-	OPTIONAL
MATERIAL		ALUMINIUM	-	ALUMINIUM	-	-
SILVER ANODISED	○	EA/900S	EA/900DS	EJ/900S	EJ/900DS	-
	○	EA/1200S	EA/1200DS	EJ/1200S	EJ/1200DS	-
	○	EA/1600S	EA/1600DS	EJ/1600S	-	-
	○	EA/2000S	-	EJ/2000S	-	-
MATT BLACK	●	EA/900B	EA/900DB	EJ/900B	EJ/900DB	-
	●	EA/1200B	EA/1200DB	EJ/1200B	EJ/1200DB	-
	●	EA/1600B	-	-	-	-
	●	EA/2000B	-	-	-	-
MATT YELLOW	●	EA/900Y	EA/900DY	EJ/900DY	EJ/900DY	-
	●	EA/1200Y	EA/1200DY	EJ/1200Y	EJ/1200DY	-
MATT BLUE	●	EA/900L	EA/900DL	EJ/900L	EJ/900DL	-
	●	EA/1200L	EA/1200DL	EJ/1200L	EJ/1200DL	-
MATT ORANGE	●	EA/900R	EA/900DR	EJ/900R	EJ/900R	-
	●	EA/1200R	EA/1200DR	EJ/1200R	EJ/1200DR	-
CLEARCOAT CARBON	●	-	-	-	-	EAC/900*
	●					EAC/1200*
	●					EAC/1600*

*Custom finish also available

TILLER EXTENSION BAGS



Protective bags for your EA and EAC tiller extension - Available in 900, 1200, 1600 and 2000 lengths

Dual zip enables opening at both ends with rugged, hard-wearing fabric

Model	Description
EA-BAG900	Protective Bag 900 Tiller Series
EA-BAG1200	Protective Bag 1200 Tiller Series
EA-BAG1600	Protective Bag 1600 Tiller Series
EA-BAG2000	Protective Bag 2000 Tiller Series

EJB TILLER EXTENSION

UNIQUE HELMING PRECISION



EJB/900B



SPINFLEX® JOINT



CLIP

The latest in lightweight, precision helming



FEATURES

- Strong, lightweight anodised aluminium tube
- 360° control - 'Spinflex'™ joint swivels freely through the full 360° arc
- 'Spinflex'™ holds tiller in helming position, 30° above horizontal for fast, high agility helming
- The Spinflex™ joint is uniquely pre-moulded at a 30° angle to reduce the bending stress both in use and at rest. It is this induced stress that leads to early failures on most vertically mounted joints
- UV resistant, extra tough 'Spinflex'™ joint
- Triple-wave handle gives a choice of secure grip positions
- Responsive 'feel' and precise helm control
- Less wrist and grip fatigue
- 3 lengths – 600mm, 900mm and 1400mm
- Hole centres allow:
 - upgrade to Spinlock EJ or EA models
 - retrofit from other extension types
- EJB Joint will fit tubes with inner dimensions 13.5mm

Specifications	Length
EJB/600B	600mm (23 ⁵ / ₈ "
EJB/900B	900mm (35 ⁷ / ₁₆ "
EJB/1400B	1400mm (55 ¹ / ₈ "
EJB-CLIP	Retaining Clip
EJB-JOINT	Replacment Spinflex Joint
EJB-KIT	Clip and Joint

WL LINE LEADS

COMPACT STANCHION LEAD SYSTEMS



Lines up to 12mm (1/2")
Stanchion ø 25mm (1")

FEATURES

- Compact furling line guide system
- Reduces line friction during furling
- Fairlead model WL/1 straight line guide for intermediate stanchions
- Sheave model WL/2 for line entry and exit stanchions with unique tracker-ball angle adjuster for perfect sheave alignment
- Complete with fastenings - easy to fit
- Replacement sheave for WL/2 available



WL/1



WL/2

Model	Line Dia	SWL at max line diameter
WL/1	12mm (1/2")	300kg (660lbs)
WL/2	12mm (1/2")	300kg (660lbs)

BE BULLSEYE

LOW PROFILE CONTROL LINE GUIDES



Improves any deck layout

Lines up to 16mm (5/8")

FEATURES

- For guiding lines between two fixed points requiring little horizontal or vertical deflection
- Guides extra lines to the cockpit cleats and clutches when no organiser sheaves are available
- Double screw fitting (except BE06)
- Stainless steel rope guide
- 6mm, 10mm, 12mm and 16mm sizes
- Low profile avoids snagging
- Integral gasket sealed base



For Multiple Bullseye
See page 29

Model	Max Line Dia
BE06	6mm (1/4")
BE10/TF	10mm (3/8")
BE12/TF	12mm (1/2")
BE16/TF	16mm (5/8")

BRS SPINNAKER BLOCK CONTROLLED SPINNAKER HANDLING



FEATURES

- Attached with webbing strop, positioned on the toe rail or padeye
- No drilling, no clutter on deck
- Cam profiled to hold loads up to 20% of the block SWL
- Plain bearing sheave provides smooth running at low loads
- Excellent durability at high loads
- Strop allows fullest rotation for spinnaker sheet use



This jammer block is for situations where a fixed foot block cannot help: peeling spinnakers or changing a sheet block

Model	Sheave Dia	SWL (Sheave)	Safe Cam Load	Line Dia
BRS/50	50mm (2")	800kg (1760lbs)	160kg (352lbs)	6-10mm (1/4-3/8")
BRS/63*	63mm (2 1/2")	1200kg (2640lbs)	240kg (528lbs)	8-12mm (5/16-1/2")

* Alloy sheave

SUA MINI JAMMER FOR USE WITH SMALLER WINCHES




Popular halyard jammer for smaller decks. More power than a camcleat, smaller than a powerclutch



Model	Line Dia	SWL at max line diameter
SUA/1	6-10mm (1/4-3/8")	400kg (880lbs)
SUA/2	6-10mm (1/4-3/8")	400kg (880lbs)
SUA/3	6-10mm (1/4-3/8")	400kg (880lbs)

RF SAILFEEDER PRECISION SAIL GUIDES

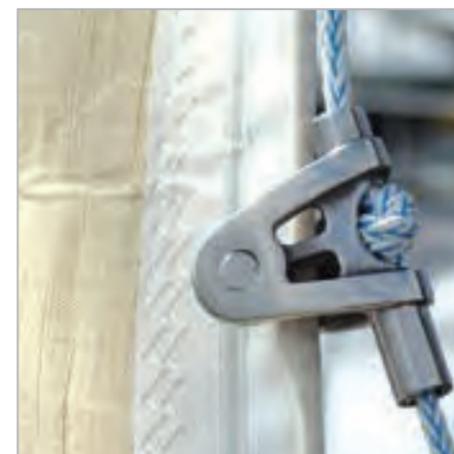

FEATURES

- Graphite loaded, anodised alloy rollers
- Reduced weight for same strength
- Electro Polished 17-4PH high grade stainless steel
- One piece precision investment casting for ultimate strength
- Mainsail feeder RF/MA locates in the mast track below the luff entry and protects luff tape during the hoist. No drilling is needed
- Headsail feeder RF/H guides any flaked genoa from the deck cleanly up into the foil
- Headsail feeders are supplied with a length of line for attachment in their correct free pivoting position between luff entry and deck
- RF/H2 for 60 feet plus racing yachts

New sailfeeders for fast, precise, smooth sail hoists

Model	Tape measurement
RF/MA	Mainsail 11mm (1/8")
RF/H	Headsail 7mm (1/4")
RF/H2	Headsail 7mm (1/4")



ATCU THROTTLE CONTROL RACEBOAT THROTTLE SOLUTION



FEATURES

- Converts a standard Teleflex™ throttle to a flush socket unit
- Provides removable handle, eliminating risk of line snags when sailing
- Allows the engine control to be located in the best position for the helmsman
- Custom handle option (ATCU-LVR) recommended for a perfect fit
- The ATCU/1 faceplate is designed to fit Teleflex™ model B700B (Teleflex™ unit not supplied)

Model	Contents
ATCU/1*	Faceplate
ATCU/1+*	Faceplate with custom lever
ATCU-LVR	Custom lever

* For assembly with unused control units only



PXR CAM CLEAT

PAGE 8-9

PXR-BRACKET Mast mount for PX & PXR

XAS POWERCLUTCH

PAGE 10-11

XAS & XA ACCESSORIES

CAM-XAS Standard replacement cam
 X-LBL Handle Labels English, French & German
 SA29 Spring Arm
 XAS-BASE0408 Base upgrade for smaller diameter line
 XAS-BASE0612 Base upgrade

XAS ACCESSORIES

XAS-SMNT Sidemount kit (including fasteners)
 XAS-HDL Handle
 XAS-SIDE Side fairings
 XAS-KIT Base, cam, sides & handle

XTS & XCS POWERCLUTCH

PAGE 12-13

XTS, XCS, XT & XC ACCESSORIES

CAM-0610 Cam upgrade for 6-10mm line
 CAM-0610C Ceramic Cam upgrade for 6-10mm line
 CAM-0814 Cam upgrade for 8-14mm line
 CAM-0814C Ceramic Cam upgrade for 8-14mm line
 CAM-1216B Cam upgrade for 12-16mm line - XCS & XC only
 CAM1216C Ceramic cam upgrade for 12-16mm line - XCS and XC only
 CAM-0812L Lock-up cam upgrade 8-12mm line
 CAM-1214L Lock-up cam upgrade 12-14mm line
 X-BASE Replacement Base XTS & XCS Clutches
 X-BASEC Ceramic coated base for XTS & XCS models
 X-HDL Black aluminium handle
 XTS-KIT Base, cam and handle
 Z-LBL High spec, high visibility handle labels
 X-LBL Handle labels English, French & German
 XTS-SIDE Plastic side fairings for XTS (pair)
 XTS-SMNT Converts standard XTS for side mounting
 XCS-SMNT Converts standard XCS for side mounting

XTS & XCS ACCESSORIES

XTS-KIT XTS Clutch Service Kit with 8-14mm rope range cam module, base and handle
 XTS-KIT0610 XTS Clutch Service Kit with 6-10mm rope range cam module, base and handle
 XTS-KIT0610C XTS/XCS Clutch Upgrade Kit - CERAMIC 6-10mm Cam Module & Base, plus Light Weight handle.
 XTS-KIT0814C XTS/XCS Clutch Upgrade Kit - CERAMIC 8-14mm Cam Module & Base, plus Light Weight handle.

XT & XC ACCESSORIES

X-SIDE Plastic side fairings for XT only (pair)

XTR POWERCLUTCH

PAGE 16

XTR-KIT Handle and cam/base module for 8-12mm
 XTR-HDL XTR Handle
 XTR-CAM0812 Cam/base module 8-12mm
 XTR-SMNT Converts standard XTR for side mounting

ZR JAMMER

PAGE 17

ZR-JAW10 Jaw assembly for ZS1014

XXA, XXB and XXC POWERCLUTCH

PAGE 18-19

XX-KIT Jaw assembly for XX0812
 XX-ROLL Standard roller set
 XX-ROLL+ TORLON™ roller set
 XX-MLDG Moulding kit for models 2010+
 XX-HDLB Handle assembly (black) for XXA and XXB
 XX-LOCK XX0812 Lock open kit
 XXB-KIT Jaw assembly for XXB0812
 XXC-KIT Jaw assembly for XXC0812
 XXC-HDLB Black Handle Kit
 XXC-HDLS Silver Handle Kit
 XXC-SMNT Side Mount Kit

ZXB POWERJAMMER

PAGE 20

ZXB-JAW12 ZXB Jammer 8-12mm Jaw Grips Ceramic
 ZXB-KIT12 ZXB Jammer replacement Jaws, Bearings, Rear Cover and Toggle/Latch Assembly
 ZXB-BRG12 ZXB Jammer 8-12mm PTFE Bearings
 ZXB-MLDG12 ZXB Jammer 8-12mm Moulding Set

ZS POWERJAMMER

PAGE 20-21

ZS-JAW08 ZS0810 Jaw Assembly
 ZS-JAW08HC ZS0810 'Ceramic' Jaw Assembly
 ZS-JAW12 ZS1214 and ZS1014C 'P' Series Jaw Assembly
 ZS-JAW12HC ZS1214 and ZS1014C 'Ceramic' Jaw Assembly
 ZS-JAW16 ZS1618 and ZS1618C 'P' Series Jaw Assembly
 ZS-JAW16HC ZS1618 and ZS1618C 'Ceramic' Jaw Assembly
 ZS-JAW18 ZS1824C 'P' Series Jaw Assembly
 ZS-JAW18C ZS1824C 'Ceramic' Jaw Assembly
 ZS-MNT0810 Alloy mounting plate
 ZS-MNT1214 Alloy mounting plate
 ZS-MNT1618 Alloy mounting plate
 ZS-MNT1014C Alloy mounting plate
 ZS-MNT1618C Alloy mounting plate
 ZS-MNT1824C Alloy mounting plate
 Z-LBL High spec, high visibility handle labels
 ZS-HDL ZS1014C & ZS1214 handle only

TSR ORGANISER

PAGE 24-27

TSR20-RL/2 Rail Pair(2) for 2 x 20mm Sheave (1 rope) with min sheave spacing
 TSR20-RL/3 Rail Pair(2) for 3 x 20mm Sheave (2 rope) with min sheave spacing
 TSR20-RL/4 Rail Pair(2) for 4 x 20mm Sheave (3 rope) with min sheave spacing
 TSR20-RL/5 Rail Pair(2) for 5 x 20mm Sheave (4 rope) with min sheave spacing
 TSR20-RL/6 Rail Pair(2) for 6 x 20mm Sheave (5 rope) with min sheave spacing
 TSR20-RL500 Rail Pair(2) 500mm long each rail
 TSR20-RL1000 Rail Pair(2) 1000mm long each rail
 TSR20/SHV TSR20 Sheave Assembly - Single
 TSR20/LSHV TSR20 Sheave Assembly - Single
 TSR20L-ESHV TSR20L End Sheave Assembly - Pair
 TSR20L-ESHVF TSR20L End Sheave Assembly Fixed - Single
 TSR30/SHV TSR20 Sheave Assembly - Single
 TSR30/LSHV TSR20 Sheave Assembly - Single
 TSR30L-ESHV TSR20L End Sheave Assembly - Pair
 TSR30L-ESHVF TSR20L End Sheave Assembly Fixed - Single

T-SERIES ORGANISER

PAGE 29-30

TB17 Composite 38mm (1 1/2") TB series only (pre 2002)
 T38-C Composite 38mm (1 1/2") T38 series only
 T38-A Alloy 38mm (1 1/2") T38 series only
 T50-C Composite 50mm (2") T50 or TA (pre 2002)
 T50-A Alloy 50mm (2") T50 or TA (pre 2002)
 T50-END T50 Plastic End Cap Moulding (Pair)
 T38-END T38 Plastic End Cap Moulding (Pair)

EA & EJ TILLER EXTENSION

PAGE 34-35

EA-HDL Handle option asymmetric
 EJ-HDL Handle option parallel
 E-GRIP Tube sleeve grip
 E-DIABOLO Stand up universal joint
 E-JOINT Full swivel joint with fastpin
 E-SHOCK Shock absorber
 E-SLEEVE Replacement pivot housing
 E-FASTPIN Full swivel joint release pin
 E-BUTTON Control button
 E-CLIP Tiller clip for all models
 E-KIT Button, clip and sleeve

EJB TILLER EXTENSION

PAGE 36

EJB-CLIP Retaining Clip
 EJB-JOINT Replacement Spinflex™ Joint
 EJB-KIT

WL FURLING LINE LEAD

PAGE 37

WL-SHEAVE Replacement sheave for WL/2

BRS SPINNAKER BLOCK

PAGE 38

BRS-STROP Replacement strop for both models

ATCU THROTTLE CONTROL

PAGE 39

ATCU-LVR Custom lever for throttle control

WEIGHTS & FASTENERS

PAGE	PRODUCT	MODEL	WEIGHT	FASTENERS	SUPPLIED	CSK HEAD	PAN HEAD	STUD	HEX HEAD
23	PD PADEYE	PD/6C	75g (2.6oz)	2 x M6 (1/4")	✓	-	-	-	-
		PD/8C	142g (5.0oz)	2 x M8 (5/16")	✓	-	-	-	-
		PD/10C	244g (8.6oz)	2 x M10 (3/8")	✓	-	-	-	-
		PD/12C	385g (13.5oz)	2 x M12 (1/2")	✓	-	-	-	-
24	TSR SERIES ORGANISER	TSR	for details contact spt@spinlock.co.uk		✓	✓	-	-	-
28	TWR SHEAVE RANGE	TWR/30	138g (4.9oz)	1 x M8 (5/16")	✓	-	-	-	-
		TWR/44	280g (9.9oz)	1 x M12 (1/2")	✓	-	-	-	-
28	TWF WINCHFEEDER	TWF/50M	200g (7.0oz)	1 x M10 (3/8")	✓	-	-	-	-
		TWF/63M	325g (11.4oz)	1 x M12	✓	-	-	-	-
29	T25 ORGANISER	T25	64g (2.2oz) for 2 M5 (3/16") 20g (0.7oz) per extra sheave		-	✓	✓	-	-
29	BE MULTIPLE BULLSEYE	BE10/2	16g (0.6oz)	2 x M5 (3/16")	-	✓	-	-	-
		BE10/3	24g (0.9oz)	2 x M5 (3/16")	-	✓	-	-	-
30	T SERIES ORGANISER	T38	115g (4.0oz) for 2 M6 (1/4")		-	✓	-	-	-
		T50	185g (6.5oz) for 2 M8 (5/16")		-	✓	-	-	-
		TC50	575g (20.1oz) for 2 M8 (5/16") (A4-80)		✓	✓	-	-	-
		TC50/D	750g (26.3oz) for 2 M8 (5/16") (A4-80)		✓	✓	-	-	-
33	EAC CARBON TILLER EXTENSION	EAC/900	299g (10.55oz)	2 x M5 (3/16")	✓	✓	-	-	-
		EAC/1200	339g (11.96oz)	2 x M5 (3/16")	✓	✓	-	-	-
		EAC/1600	406g (14.32oz)	2 x M5 (3/16")	✓	✓	-	-	-
		EAC/2000	461g (16.26oz)	2 x M5 (3/16")	✓	✓	-	-	-
34	EA TILLER EXTENSION	EA/900S	690g (24.2oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EA/1200S	780g (27.3oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EA/1600S	800g (1lb 12oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EA/2000S	900g (1lb 15oz)	2 x M5 (3/16)	✓	✓	-	-	-
35	EJ TILLER EXTENSION	EJ/900S	445g (15.6oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EJ/1200S	510g (17.9oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EJ/1600S	800g (1lb 12oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EJ/2000S	900g (1lb 15oz)	2 x M5 (3/16)	✓	✓	-	-	-
36	EJB TILLER EXTENSION	EJB/600B	125g (4.4oz)	2 x M5 (3/16")	-	-	✓	-	-
		EJB/900B	170g (6.0oz)	2 x M5 (3/16")	-	-	✓	-	-
		EJB/1400B	255g (8.9oz)	2 x M5 (3/16")	-	-	✓	-	-
37	WL FURLING LINE LEAD	WL/1	40g (1.4oz)	Stanchion: 25mm (1")					
		WL/2	70g (2.5oz)	Stanchion: 25mm (1")					
37	BE BULLSEYE	BE06	5g (0.18oz)	1 x M4 (5/32")	-	✓	-	-	-
		BE10/TF	8g (0.28oz)	2 x M4 (5/32")	-	✓	-	-	-
		BE12/TF	14g (0.49oz)	2 x M5 (3/16")	-	✓	-	-	-
		BE16/TF	35g (1.2oz)	2 x M6 (1/4")	-	✓	-	-	-

WEIGHTS & FASTENERS

PAGE	PRODUCT	MODEL	WEIGHT	FASTENERS	SUPPLIED	CSK HEAD	PAN HEAD	STUD	HEX HEAD
38	BRS SPINNAKER BLOCK	BRS/50	250g (8.8oz)	Soft attachment	-	-	-	-	-
38	SUA MINI JAMMER	SUA/1	170g (6.0oz)	4 x M6 (1/4")	-	-	✓	-	-
		SUA/2	250g (8.8oz)	4 x M6 (1/4")	-	-	✓	-	-
		SUA/3	350g (12.3oz)	4 x M6 (1/4")	-	-	✓	-	-
39	RF SAILFEEDER	RF/MA	136g (4.8oz)	Sail: Mainsail Tape: 11mm (7/16")					
		RF/H	140g (4.9oz)	Sail: Headsail (single) Tape: 7mm (1/4")					
		RF/H2	219g (7.7oz)	Sail: Headsail Tape: 7mm (1/4")					
39	ATCU ENGINE THROTTLE CONTROL	ATCU/1	260g (9.1oz)	4 x M5 (3/16")	✓	✓	✓	-	-
		ATCU/1+	380g (13.3oz)	4 x M5 (3/16")	✓	✓	✓	-	-
		ATCU-LVR	107g (3.8oz)	-	-	-	-	-	-











WEIGHTS, FASTENERS & DIMENSIONS

ALL TECHNICAL DATA IS AVAILABLE AT SPINLOCK.CO.UK AND PROSUPPORT@SPINLOCK.CO.UK






DIMENSIONS


PAGE 8-9
PXR CAM CLEAT

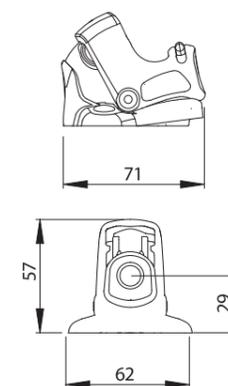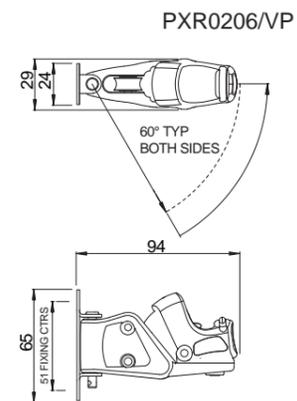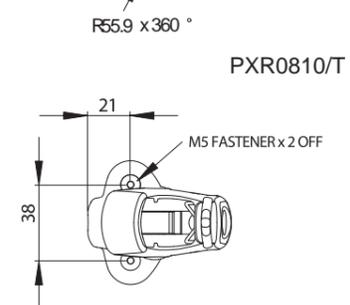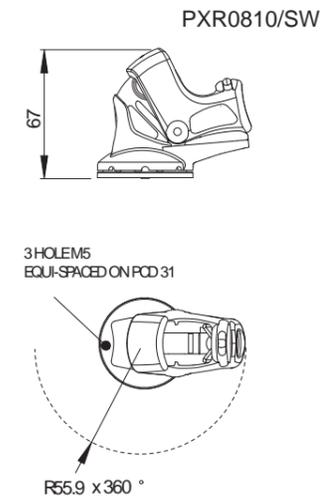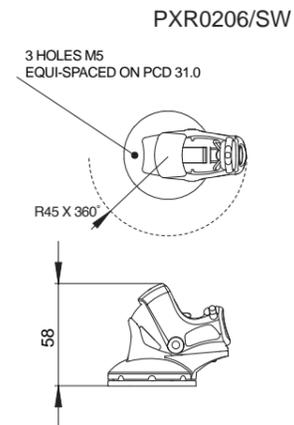

PAGE 10-11
XAS POWERCLUTCH

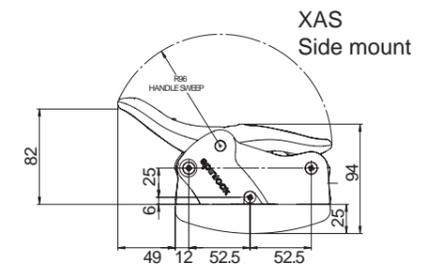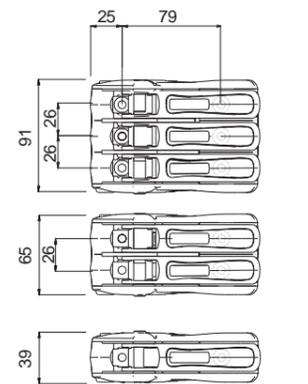

PXR MAST BRACKET

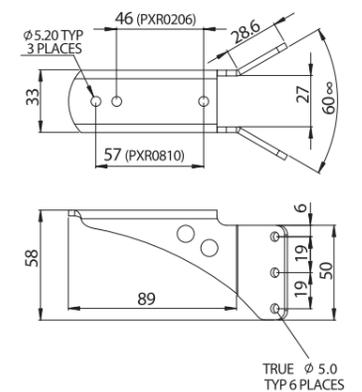


PX dimensions available online at www.spinlock.co.uk

Drawings not to scale: Do not use as drill templates


DIMENSIONS

PAGE 29
T25 ORGANISER

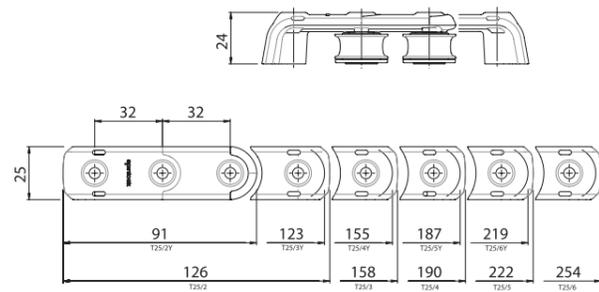


PAGE 30
T SERIES ORGANISER


Symmetric & Asymmetric versions

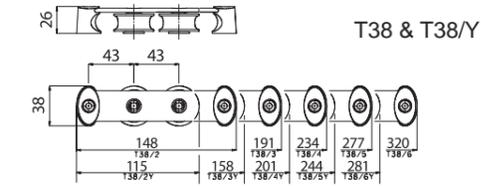


T50 & T50/Y

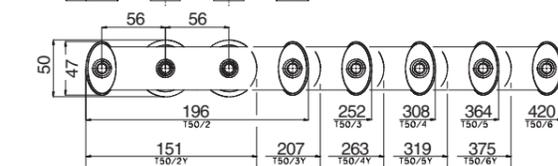


TC50

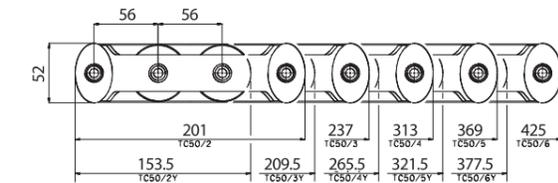



TC50/D




PAGE 29
BE MULTIPLE BULLSEYE




BE10/2



BE10/3




PAGE 34-35
EA & EJ TILLER EXTENSION

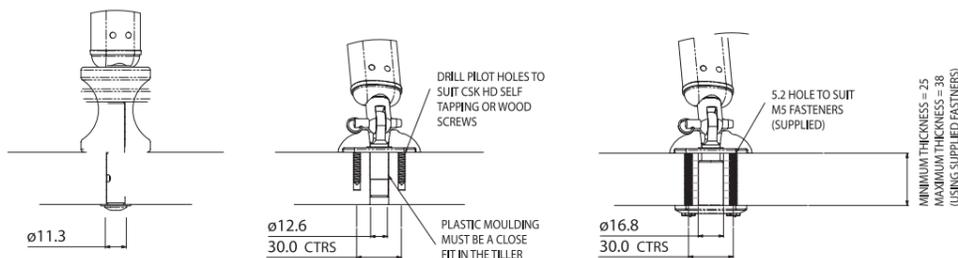


Drawings not to scale: Do not use as drill templates

PAGE 36
EJB TILLER EXTENSION




PAGE 37
WL LINE LEAD

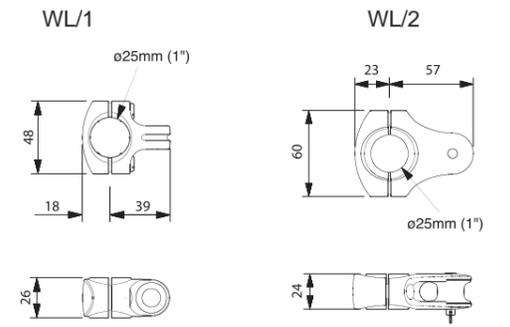


PAGE 37
BE BULLSEYE

BE06

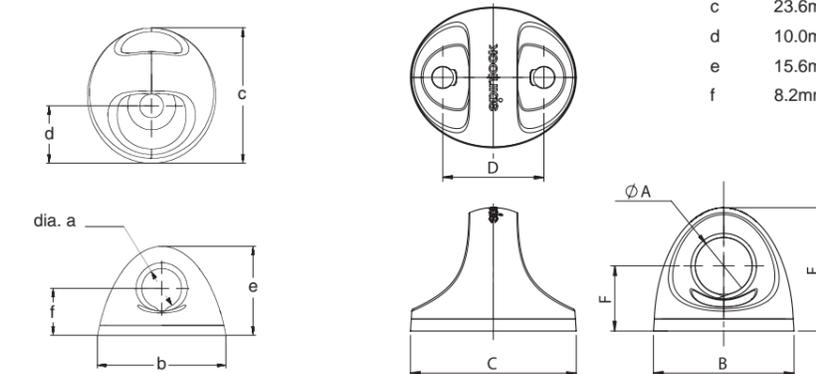


	BE06	BE10/TF	BE12/TF	BE16/TF
a	7.0mm	11.0mm	13.5mm	17.0mm
b	22.5mm	27.8mm	33.3mm	39.3mm
c	23.6mm	32.8mm	39.3mm	52.4mm
d	10.0mm	20.0mm	24.0mm	32.0mm
e	15.6mm	24.4mm	29.3mm	39.0mm
f	8.2mm	12.8mm	15.5mm	20.5mm

PAGE 38
BRS SPINNAKER BLOCK

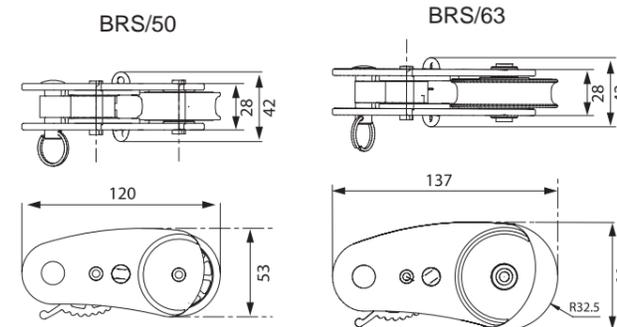

PAGE 38
SUA MINI JAMMER

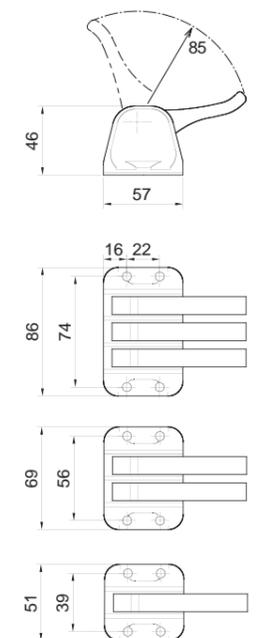

Drawings not to scale: Do not use as drill templates




PROTECT
NO LIMITS

HARNESS RELEASE SYSTEM (HRS™)

ISO12402-1 Deck Safety Harness

Soft loop attachment point for safety line, located on front of lifejacket for ease of access. The soft loop attachment point for safety line can be released in an emergency to free a person from their safety line

- Activation handle located behind soft loop, easy to locate, grab and pull
- Soft loop attachment released and open
- User separated from safety line and boat
- Easily reset to use again

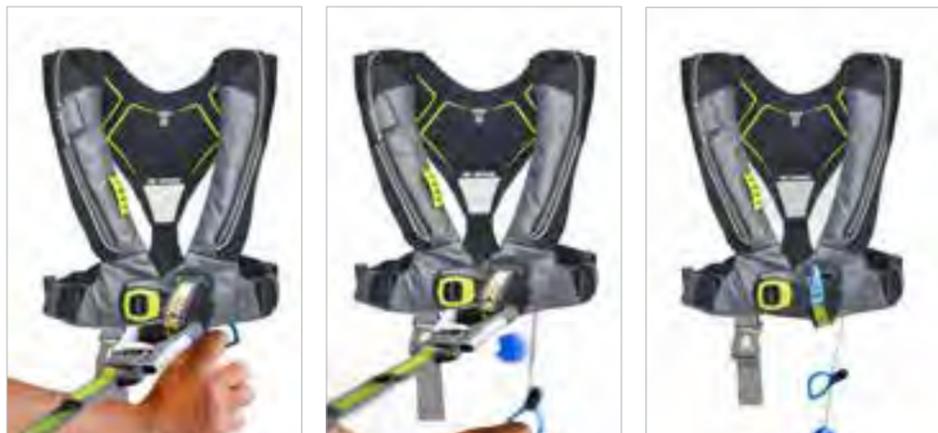

1) PULL HRS™ HANDLE TO ACTIVATE

2) HARNESS LOOP RELEASES



DECKVEST 6D LIFEJACKET HARNESS WITH OPTIONAL HRS

FEATURES

- 170N and 275N Buoyancy
- One Size
- UML Pro Sensor Elite activation system
- Improved front opening buckle with smooth body adjuster system
- Optional Harness Release System (HRS™)
- Enhanced shoulder fit system for the perfect fit – every time – all day
- Enhanced back profile for clean, unobtrusive look and fit
- Hard wearing coated fabrics in key areas
- New sprayhood design with large visor – stored away from neck
- Firing system on rear of bladder for improved comfort and reduced snagging when inflated
- 40mm Single Leg Strap with stowage pocket - extra wide, easy to locate
- Pylon 360° lifejacket light fitted
- Lume-On bladder illumination lights fitted
- MOB2 Beacon AIS Compatible
- 5 Year Warranty

275N Benefits

170N is the recommended buoyancy for offshore sailing. Although a little bulkier and marginally heavier, a 275N lifejacket may be of benefit to certain users:



- Can be of benefit to larger users
- May turn over a face-down body quicker
- May hold the user's head higher out of water
- Supports the extra weight of tools or equipment and provides extra flotation for commercial users



Model	Description
Deckvest 6D 170N	
DW-LJH6D/A	Deckvest 6D 170N (Charcoal & Black)
DW-LJH6D/ACY	Deckvest 6D 170N (Citrus & Black)
DW-LJH6D/APB	Deckvest 6D 170N (Pacific Blue & Black)
DW-LJH6D/ATW	Deckvest 6D 170N (Tropic White & Charcoal)
DW-LJH6D/A/HRS	Deckvest 6D 170N with HRS System (Charcoal & Black)
DW-LJH6D/ACY/HRS	Deckvest 6D 170N with HRS System (Citrus & Black)
DW-LJH6D/APB/HRS	Deckvest 6D 170N with HRS System (Pacific Blue & Black)
DW-LJH6D/ATW/HRS	Deckvest 6D 170N with HRS System (Tropic White & Charcoal)
Deckvest 6D 275N	
DW-LJH6D/A275	Deckvest 6D 275N (Charcoal & Black)
DW-LJH6D/A275/HRS	Deckvest 6D 275N with HRS System (Charcoal & Black)
Optional Fitting	
DW-MOB/2-F	Ocean Signal MOB2 AIS Beacon Unit Fitted
DW-HRS/6D-F	Deckvest 6D Harness Release System Fitted
DW-RAK/E170	ELITE Lifejacket Re-arming Kit (33g cylinder)
DW-RAK/E275	ELITE Lifejacket Re-arming Kit (33g cylinder)

CE approved
ISO12402-3 150N Lifejacket
ISO12402-2 275N Lifejackets
ISO12401 Deck Harness

DECKVEST 6D LIFEJACKET HARNESS WITH OPTIONAL HRS™

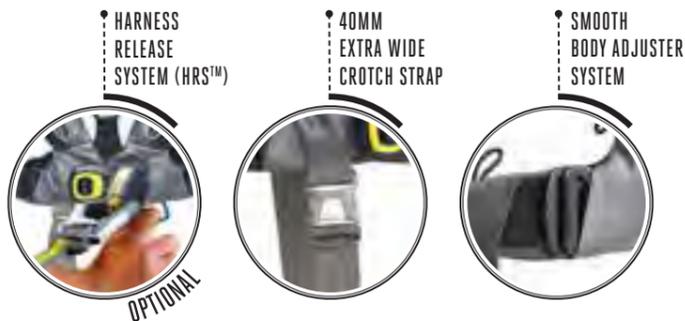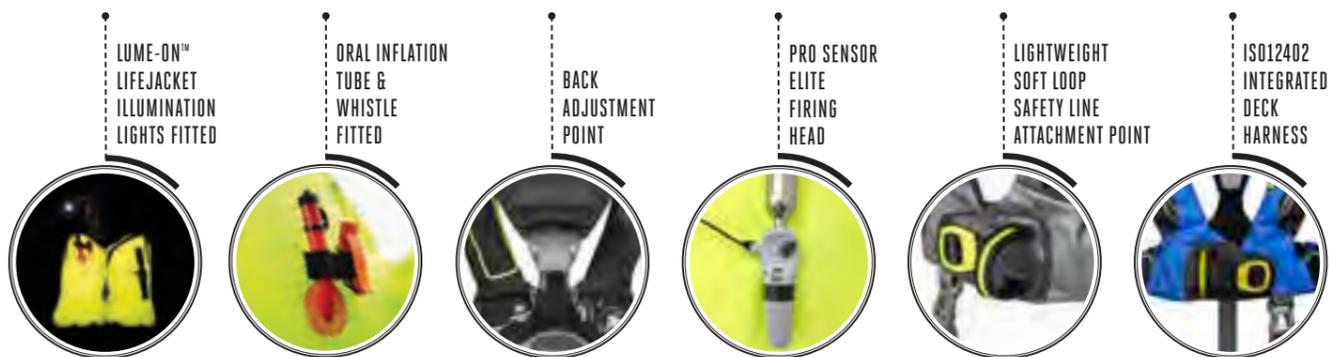

**"REVOLUTIONISING RISK:
DECKVEST VITO AFS SETS
UNMATCHED SAFETY STANDARD"**



DECKVEST VITO AFS OFFSHORE LIFEJACKET HARNESS

NEW

The AFS (Advanced Flotation System) puts the buoyancy of the inflated jacket where it functions best – giving enhanced rotation, freeboard and very importantly stability in the water

Very low profile bladder shape for increased manoeuvrability in water

Smaller, lighter and softer than traditional 2D welded lifejackets

The combined use of highly visible colours, hi-vis pink with hi-vis yellow has been proven to enhance visibility at distance in challenging conditions



FEATURES

170N buoyancy

Hammar® hydrostatic automatic inflation system

Fitted with Harness Release System (HRS™)

Striking design finish in durable rip stop fabric

Structured fit allows easy donning with simple to adjust buckles

Fine tune adjust each time for layers of clothing

Latest Deckvest 6D style button fastening

Pylon Lifejacket Light™ fitted

Lume-On™ lifejacket bladder illumination lights fitted

Structured sprayhood to reduce the risk of secondary drowning fitted

PLB fitting approved

Central attachment loops, for remote steering or MOB alert devices

Wider 40mm leg strap with stowage

Toggle attachment points for optional Chest Pack (DW-PCC)

FITTED WITH HARNESS RELEASE SYSTEM (HRS™)



Soft loop attachment point for safety line, located on front of lifejacket for ease of access. The soft loop attachment point for safety line can be released in an emergency to free a person from their safety line

- Activation handle located behind soft loop, easy to locate, grab and pull
- Soft loop attachment released and open
- User separated from safety line and boat
- Easily reset to use again

1) PULL HRS™ HANDLE TO ACTIVATE

2) HARNESS LOOP RELEASES


Model	Description
DW-VT2/H170	Deckvest VITO 170N Lifejacket Harness

Optional Fitting	Description
DW-MOB/2-F	Ocean Signal MOB2 AIS Beacon Unit Fitted
DW-PLB/3-F	Ocean Signal PLB3 AIS Personal Locator Beacon
DW-PCC-F	Chest Pack Fitted
DW-CTR	Safety Line Cutter and Stowage Pouch

Information

One Size
Chest measurement: 80-145cm
Product Weight: 1.24kg (2lb 12oz)

CE approved
ISO 12402-3 Lifejacket (170N)
ISO 12401 Deck Harness
Pylon Light ISO 12402-8
Sprayhood ISO 12402-8

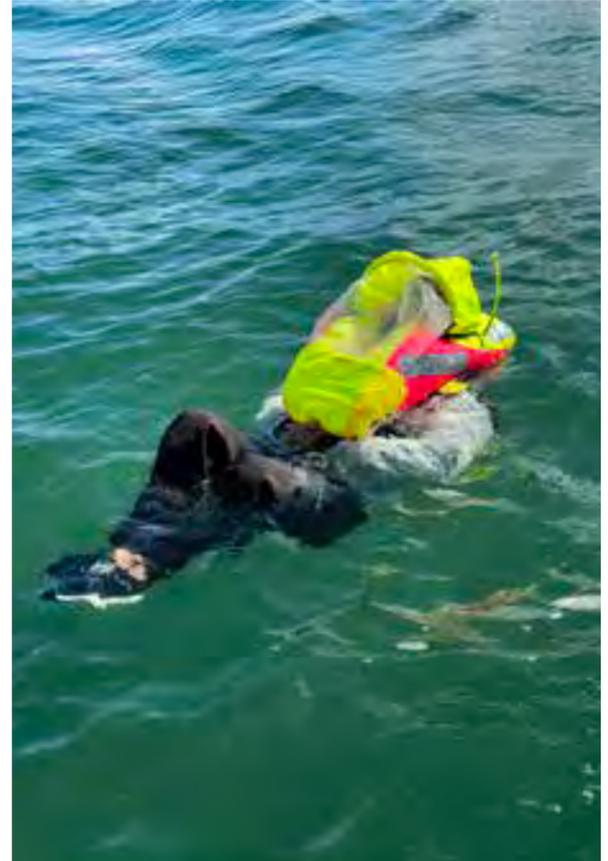

DECKVEST LITE & LITE+ 170N ULTRA-LIGHTWEIGHT LIFEJACKET



DECKVEST LITE ULTRA-LIGHTWEIGHT LIFEJACKET

FEATURES

- New clean, contemporary design
- Designed for the perfect fit - every time
- Lightweight low profile
- Durable honeycomb ripstop cover fabric
- 170N (38lbs) buoyancy
- UML MK5 inflator
- One size
- Single crotch strap with recessed clip reduces risk of snagging
- Muted highly reflective panel detail
- Clipping area for PLB / VHF
- Optional Lume-On™ bladder illumination lights
- Optional Pylon™ 360 degree lifejacket light
- Attachment point for optional Sprayhood
- Attachment point for optional Chest Pack
- Attachment point for kill cord or VHF leash
- Webbing end tidy
- Neoprene neck panel for added comfort
- Through Life Support (TLS) Registration extends product warranty to 5 years



- Black Graphite (A)
- Pacific Blue (APB)
- Flow Green (AFG)
- Bleach White (BW)
- Seagrass Green (SG)



BLEACH WHITE SEAGRASS GREEN



BLACK GRAPHITE PACIFIC BLUE FLOW GREEN

Model	Description
DW-LTE/A	Deckvest LITE, Black Graphite
DW-LTE/APB	Deckvest LITE, Pacific Blue
DW-LTE/AFG	Deckvest LITE, Flow Green
DW-LTE/ABW	Deckvest LITE, Bleach White
DW-LTE/ASG	Deckvest LITE, Seagrass Green
Optional Fitting	
DW-SHD/170-F	Deckvest LITE Sprayhood Fitted
DW-PYL/L1-F	Pylon™ Lifejacket Light Fitted
DW-LMN-F	Lume-On™ Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-MOB/2-F	Ocean Signal MOB2 AIS Beacon Unit Fitted
DW-MAK	UML Manual Conversion Kit Available Fitted

UKCA and CE approved
 ISO12402-3 150N Lifejacket
 ISO 12402-6 Special application lifejackets



DECKVEST LITE+ ULTRA-LIGHTWEIGHT LIFEJACKET WITH HARNESS

FEATURES

- Harness version of the popular Deckvest LITE
- Lifejacket Harness with soft loop safety line clipping point
- 170N and 275N buoyancy
- Quick and easy to use anodised buckle
- Designed for the perfect fit - every time
- UML MK5 inflator
- Lightweight low profile design
- Durable honeycomb ripstop cover fabric
- One size
- Single crotch strap with recessed clip reduces risk of snagging
- Clipping area for PLB / VHF
- Optional Lume-On™ bladder illumination lights
- Optional Pylon™ 360 degree lifejacket light
- Attachment point for optional Sprayhood
- Attachment points for optional Chest Pack
- Attachment point for kill cord or VHF leash
- Webbing end tidy
- Neoprene neck panel for added comfort
- Through Life Support (TLS) Registration extends product warranty to 5 years



- Black Graphite 170N & 275N
- Sun Yellow 170N Only



275N has unique "high lift" bladder for additional height and stability in the water

Model	Description
DW-LTH/A	Deckvest LITE+ 170N, Black Graphite
DW-LTH/ASY	Deckvest LITE+ 170N, Sun Yellow
DW-LTH/A275	Deckvest LITE+ 275, Black Graphite
Optional Fitting	
DW-SHD/170-F	Deckvest LITE Sprayhood Fitted
DW-PYL/L1-F	Pylon™ Lifejacket Light Fitted
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-MOB/2-F	Ocean Signal MOB2 AIS Beacon Unit Fitted
DW-MAK-F	UML Manual Conversion Kit Fitted


- CE approved
- ISO 12402-3 150N Lifejacket
- ISO 12402-2 275N Lifejacket
- ISO12401 Deck Harness
- ISO 12402-6 - Special application lifejackets



EXTRA SMALL



WESTIE 8KG - SMALL

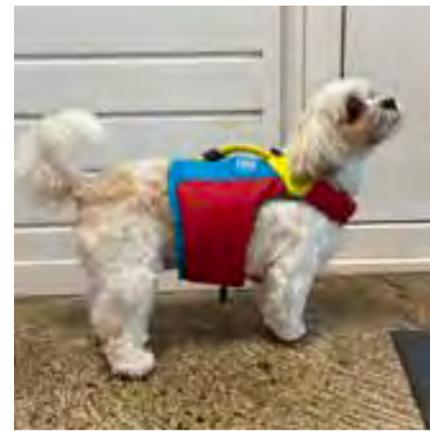


EXTRA SMALL



SMALL



EXTRA SMALL

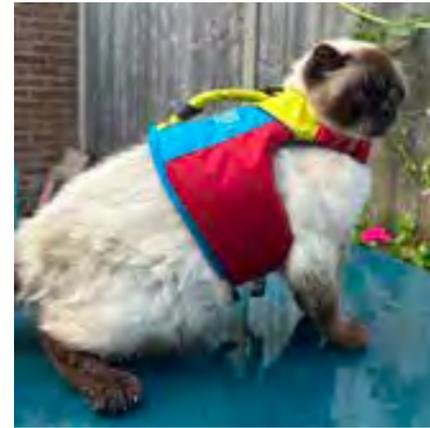


5KG BERMESE EXTRA SMALL




SMALL



MEDIUM

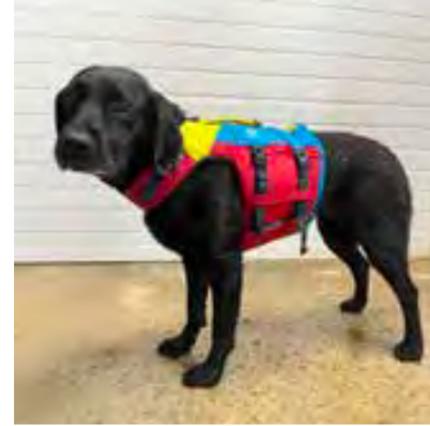


MEDIUM

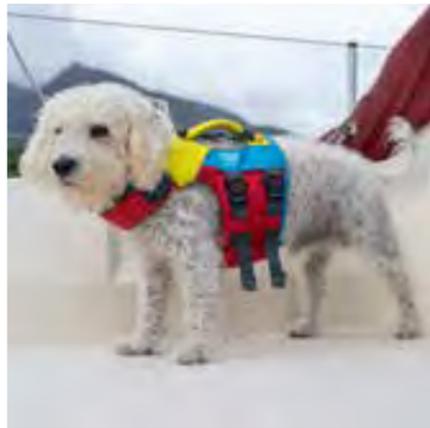

EXTRA SMALL



MEDIUM

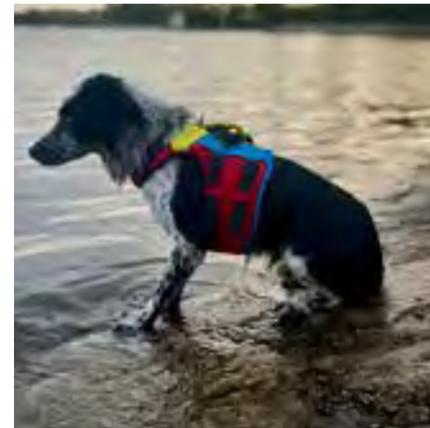

MEDIUM

FIDO FLOTATION VEST FOR DOGS

Keep your canine companion as safe as you are when in or around the water. Designed with the same precision and quality as our marine safety equipment, the Spinlock FIDO flotation vest provides buoyancy and comfort, allowing dogs to embrace adventures with confidence.

FEATURES

Lightweight foam flotation

3 sizes; extra small, small and medium

Convenient handle on the back of the lifejacket allows for easy lifting and retrieval of your dog from the water

Tailored with adjustable straps, can be adjusted to fit your dog comfortably, offering a secure and snug fit that allows for freedom of movement

Designed with your dog's comfort in mind, prevents chafing or discomfort during extended wear

Breathable construction ensures proper ventilation, keeping your dog cool and comfortable during offshore adventures



SIZE	GIRTH (CM)	NECK (CM)	LENGTH (CM)
XS	43-56	31-41	17
S	56-69	38-50	21
M	69-81	45-59	29

Model	Size	Approx Weight
DW-FD/XS	Extra Small	3-8kg
DW-FD/S	Small	8-15kg
DW-FD/M	Medium	15-40kg

Model	Description
DW-FD/XS	FIDO, Dog Flotation Vest, Extra Small
DW-FD/S	FIDO, Dog Flotation Vest, Small
DW-FD/M	FIDO, Dog Flotation Vest, Medium

CELEBRATE LITTLE ADVENTURES



NEW

DECKVEST NEMO & NEMO+

INFANT & CHILD LIFEJACKET RANGE

NEW

FEATURES

Soft neck panels to reduce chafing

Easy attach and adjust buckle for security

Padded secure leg strap to hold the jacket in place

Simple zip access for easy donning

Whistle for alerting attention

High-volume buoyancy with a supporting collar ensures that children will be turned over and the head supported out of the water even if they are non-swimmers

NEMO: One junior size for children weighing 15-30kg. Please note, children's lifeackets are best fitted by weight

NEMO has grab handle on the top of the neck.

NEMO+ Two Junior Sizes Infant <15kg and Child 15-30kg. Please note, children's lifeackets are best fitted by weight

NEMO+ The harness point is positioned on the back to keep the safety line clear of the child, ensuring small hands stay safely out of the way

NEMO+ has a front hand-only grab handle for adults to lift the child to safety, cleverly designed to reduce any snagging risk



NEMO+

NEMO

DECKVEST NEMO+ INFANT & CHILD LIFEJACKET



FRONT HANDLE

Front handle is a grabbing and lifting point only


BACK HARNESS

ISO12401 Certified rear harness attachment point. Back harness attachment point can be used in conjunction with a safety line

MODEL	SIZE	BUOYANCY	WEIGHT	CHEST
DW-CNMH/1	Infant	45N	<15kg	40-50cm
DW-CNMH/2	Child	60N	15kg - 30kg	45-60cm
DW-CNM/2	Child	60N	15kg - 30kg	45-60cm

Model	Description
DW-CNMH/1	Deckvest NEMO+ Lifejacket, Infant
DW-CNMH/2	Deckvest NEMO+ Lifejacket, Child
DW-CNMH/2	Deckvest NEMO Lifejacket, Child

UKCA and CE Approved	
ISO 12402-4 Lifejacket	100N Lifejacket (NEMO)
ISO 12402-3 Lifejacket	150N Lifejacket (NEMO+)
ISO 12401	Deck Harness (NEMO+)

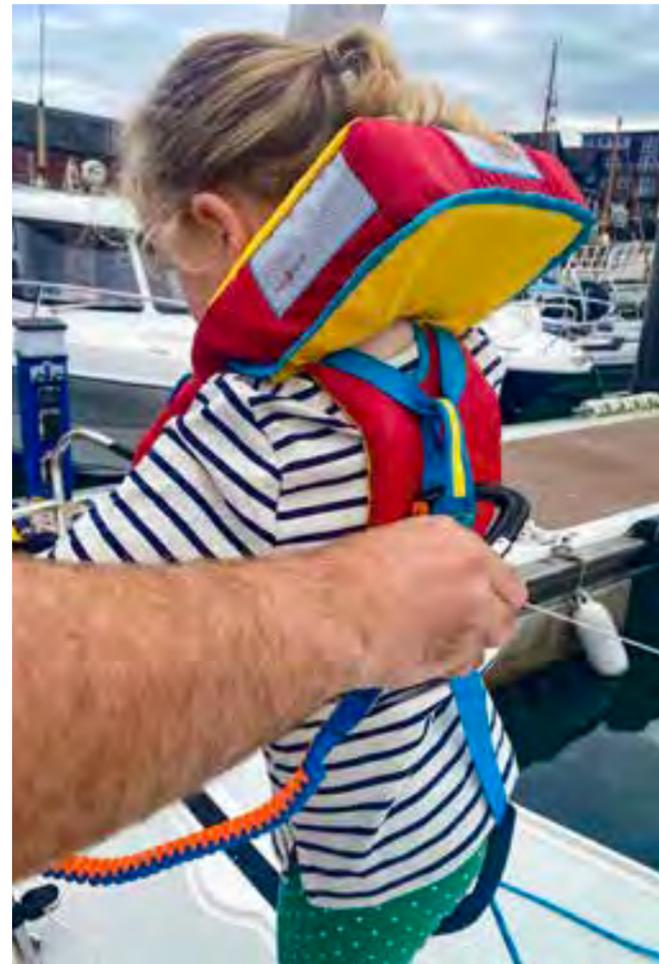

DECKVEST NEMO & NEMO+ INFANT & CHILD LIFEJACKET RANGE

NEW



REFLECTIVE
PANELS TO AID
VISIBILITY



PADDLED, SECURE LEG
STRAP TO HOLD
LIFEJACKET IN PLACE
IN THE WATER



PROTECTIVE COLLAR
WILL KEEP HEAD
SUPPORTED IN THE
WATER



WHISTLE
TO ALERT
ATTENTION



SOFT
NEOPRENE
NECK PANEL



WEBBING
BELT END
TIDY



ISO 12402-4
100N LIFEJACKET
(NEMO)



ONE SIZE:
CHILD 15-30KG
(NEMO)



NEMO

FRONT HAND-ONLY
GRAB HANDLE FOR
ADULTS TO LIFT CHILD
TO SAFETY

REAR
DECK HARNESS
FOR SAFETY LINE:
CLIP OR COW-HITCH



ISO 12402-3
150N LIFEJACKET
(NEMO+)

INTEGRATED
DECK HARNESS
ISO 12401 DECK HARNESS
(NEMO+)

TWO SIZES:
INFANT <15KG AND
CHILD 15-30KG
(NEMO+)



NEMO+

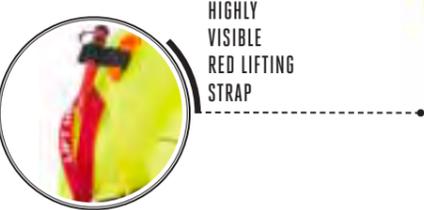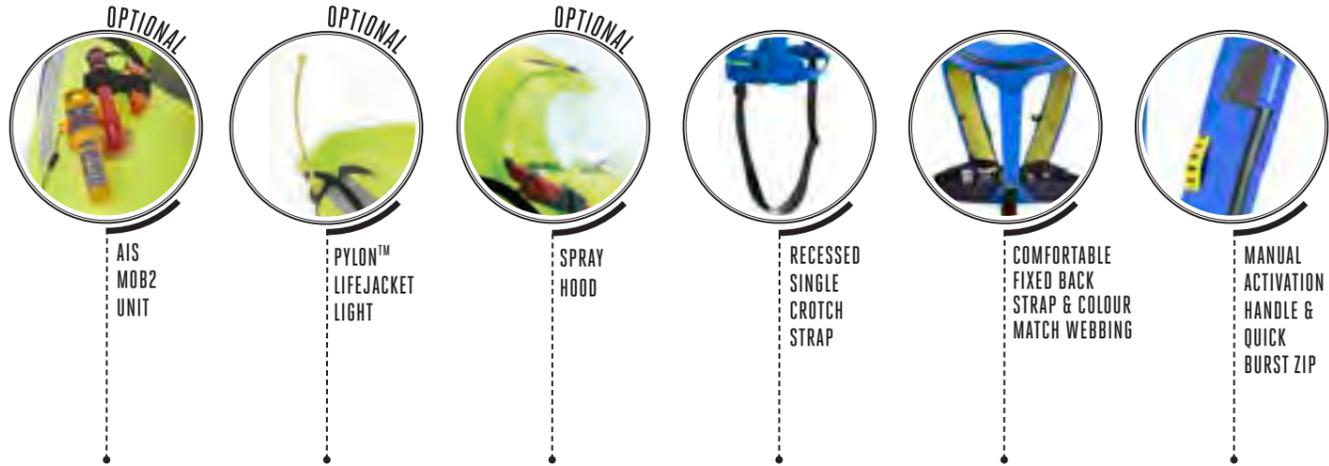


TARGET USERS

For serious Junior sailors who need the benefit of a comfortable automatic inflating Lifejacket and Harness

FEATURES


- Junior 150N Category Lifejacket Harness (100N required buoyancy)
- Weight range 20-50kgs
- Compact and lightweight with form-fitting shape
- Neoprene neck panel for added comfort
- Soft loop harness attachment point
- Lightweight easy adjust belt
- Single Crotch Strap
- Automatic inflation – UML Mk 5
- Optional Lume-On™ bladder illumination lights
- Optional Pylon™ 360 degree lifejacket light
- Attachment for optional Pylon™ Light
- Attachment for optional Sprayhood
- Through Life Support (TLS) Registration extends product warranty to 5 years

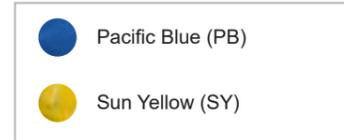

SUN YELLOW

Model	Description
DW-CEN/APB	Deckvest Cento, Pacific Blue
DW-CEN/ASY	Deckvest Cento, Sun Yellow
Optional Fitting	
DW-SHD/100-F	Cento Sprayhood Fitted
DW-PYL/L1-F	Pylon™ lifejacket light Fitted
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-MOB/2-F	Ocean Signal MOB2 AIS Beacon Unit Fitted
DW-MAK-F	UML Manual Conversion Kit available
DW-LMN-F	Lume-On™ Fitted

UKCA and CE approved
 ISO12402-3 150N Lifejacket
 ISO12401 Deck Harness
 ISO 12402-6 - Special application lifejackets

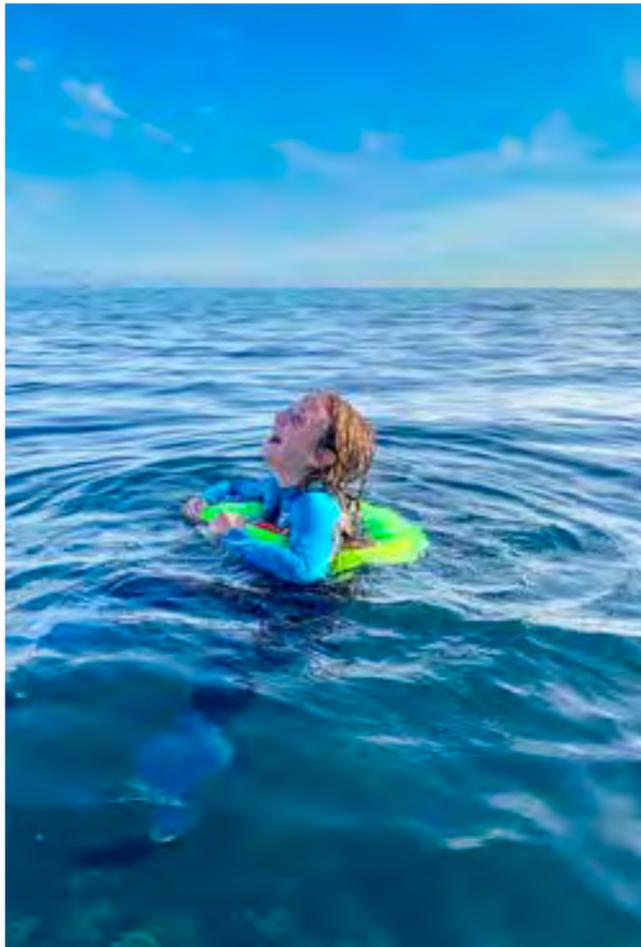

ALTO BELT PACK 75N WAIST-WORN FLOTATION AID

Designed for a range of watersports, the ALTO is a lightweight, compact, inflatable flotation device worn around the waist. Simple, discrete easy to use emergency inflation. Manually operated, the inflatable tube is released from the waist pack and then supports the user under the arms and around the chest. ALTO offers users such as SUP, fishermen and boaters, a simple and easy to use inflatable pack that feels invisible when worn.

FEATURES


- Large 75N of emergency buoyancy
- Compact and lightweight adjustable waist belt for a simple, close fit
- Can be worn on front or back
- Manually activated Halkey Roberts firing head and 16g Cylinder



ALTO ISO VERSION PART CODES

Model	Description
DW-AT/M75	ALTO 75N Flotation Aid (Black)
DW-AT/M75/MR	ALTO 75N Flotation Aid (Mercury Red)
DW-AT/M75/FO	ALTO 75N Flotation Aid (Fluro Orange)
DW-AT/M75/CY	ALTO 75N Flotation Aid (Citrus Yellow)
DW-AT/M75/AB	ALTO 75N Flotation Aid (Atoll Blue)
Rearming Kit	
DW-RAK/75	ALTO rearming kit (2 x 16g CO2 & 2 x manual clips)
Optional Fitting	
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted

UKCA and CE approved
 ISO12402-5 50N Buoyancy Aid
 ISO12402-6 Special application lifejackets

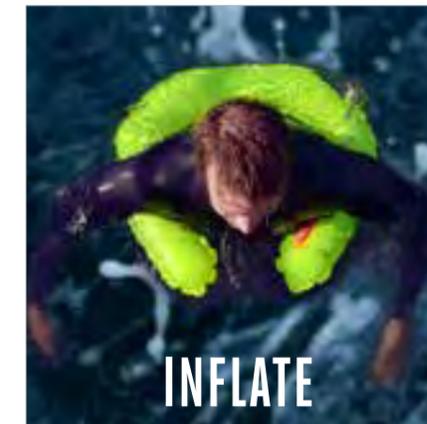



ALTO BELT PACK 75N WAIST-WORN FLOTATION AID



75N EMERGENCY INFLATABLE BUOYANCY



SLIM AND LIGHTWEIGHT DESIGN



ONE SIZE 60-145CM (27-57 INCH) WAIST



INFLATES ONLY WHEN YOU NEED IT TO, MANUALLY BY PULLING THE TOGGLE



INFLATES INTO A HORSE SHOE SHAPE



SUPPORTS THE USER AROUND THE CHEST WHEN INFLATED



ALTO THROW PACK & STORAGE POUCH FOR MOUNTING ON-DECK

ACCESSORIES



INTEGRATES WITH FULLY WATERPROOF IPX7 RATED SPINLOCK WATERPROOF PACK RANGE

ACCESSORIES



RE-ARMING KIT INCLUDES 2 x CO2 & 2 x CLIPS (DW-RAK/75)

ACCESSORIES



INTEGRATES WITH LUME-ON™ LIFEJACKET ILLUMINATION LIGHTS



ACCESSORIES

HALKEY ROBERTS OPERATING SYSTEM WITH 16g CO2 BOTTLE & MANUAL CLIP




SIT BACK & FLOAT OR TURN & SWIM TO SAFETY



ISO12402-5 50N BUOYANCY AID
ISO12402-6 SPECIAL PURPOSE BUOYANCY AID
USCG VERSION AVAILABLE!



WORN AROUND THE WAIST, FRONT OR BACK



VIVID COLOUR RANGE



ALTO THROW HOLDER STORAGE POUCH FOR THE ALTO

FEATURES

Storage pouch for the ALTO with multiple attachment options – allowing ALTO to be accessible as needed if not being worn

Multiple adjustable fitting options allows the pocket to be mounted in various accessible locations

ALTO can be thrown to casualties in the water if needed, ALTO will float when uninflated

Easy open lid – allows quick access to the ALTO when needed

Heavy duty materials protect the ALTO from the environment

High Visibility colours for easy location

Model	Description
DW-TAH/FO	ALTO Holder, Orange



WATERPROOF PACK RANGE FOR ALL YOUR ESSENTIALS

FEATURES

3 Sizes - Small, Medium, Large

Fully Waterproof - IPX7 Rated

Waterproof press closure

Opening belt loop attachment

Internal security loop

External tether point

Medium and Large packs include a window


Large pack - single pocket wraps over belt to form smaller pack

Universal back loop allows attachment to hard or soft mounts



●	Yellow Lime (YL)
●	Blue Azure (BA)

Model	Description
DW-PW/1YL	Pack size 1 small, Yellow Lime
DW-PW/1BA	Pack size 1 small, Blue Azure
DW-PW/2YL	Pack size 2 medium, Yellow Lime
DW-PW/2BA	Pack size 2 medium, Blue Azure
DW-PW/3YL	Pack size 3 large, Yellow Lime
DW-PW/3BA	Pack size 3 large, Blue Azure

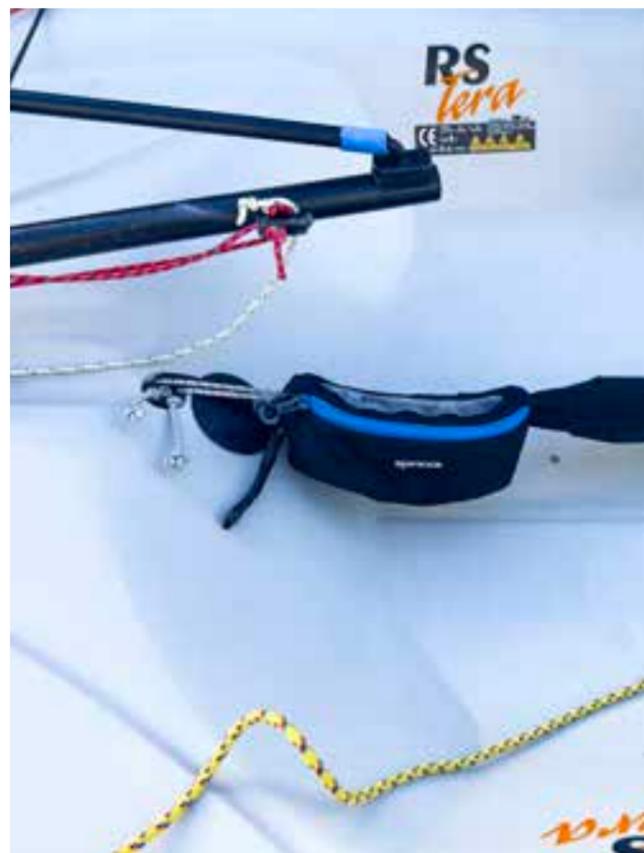

Our pack range is designed to integrate with our lifejacket range, but the versatile attachment systems allow them to be used for a wide range of applications - rail hanging, toestraps etc

CHEST PACK



DW-PCC

- Smallest pack - suitable for personal essentials
- Lightly padded with structured two way zip for easy access
- Internal lanyard attachment and key clip for security
- 'Toggle Fits' all Deckvest Models in chest position, left hand side
- Fits to any belt with secure double fold hook and loop attachment
- Self-draining

BELT PACK



DW-PCB

- Mid size pack - suitable for daily essentials
- Lightly padded with structured two way zip for easy access
- Internal lanyard attachment and key clip for security
- Clear panel window
- Fits to any belt with secure double fold hook and loop attachment
- Self-draining

SIDE PACK



DW-PCS

- Larger size pack - suitable for daily essentials
- Secure water bottle holder - includes 380ml bottle
- Lightly padded with structured two way zip for easy access
- Internal lanyard attachment and key clip for security
- Fits to any belt with secure double fold hook and loop attachment
- Self-draining

TOOL PACK



DW-PCT

- Heavy duty soft tool bucket for carrying large items aloft
- Big enough for power tools, hammers and range of hand tools
- Hard wearing PU coated fabric
- 3 large pockets
- Internal pocket for small items
- Lash points for tool security

EXPLORER

100% WATERPROOF PACK RANGE

EXPLORER 35 LITRE

EXPLORER 2 LITRE

EXPLORER 2 LITRE 100% WATERPROOF WAIST-WORN BAG

NEW

Super Versatile 100% waterproof belt storage pack with easy to use airtight/watertight zipper

FEATURES

Rated to IPX7 - fully waterproof up to 1 metre

2 litre capacity


PVC free waterproof fabric

Made with TRU ZIP waterproof and dustproof self-healing zipper

Internal mesh pocket and lanyard

Ideal to use with beacons such as AIS MOBI, PLB and PLB3

Large font panel can be easily branded to make custom products for teams, events or organisations

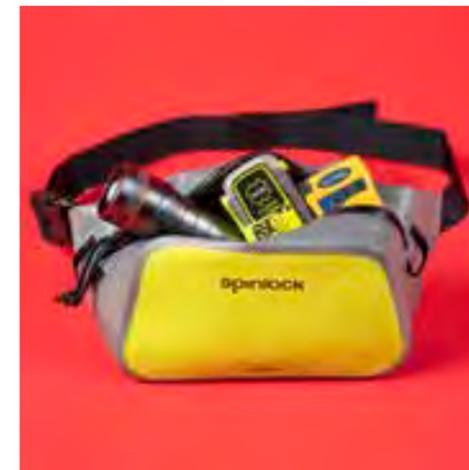

Model	Description
DW-PBW/2CY	Explorer, 2L, Waterproof, Citrus Yellow
Size	Description
2 Litre	120 H x 355 W x 60 D mm

NEW BLACK GRAPHITE
COLOUR-WAY



EXPLORER 35 LITRE 100% WATERPROOF ROLL TOP BAG

NEW

Now available in Black Graphite.

Keep your gear dry and secure with the Spinlock Explorer 35 Litre Waterproof Roll Top Bag. Perfect for all your watersports adventures, no matter the conditions.

Rugged and reliable waterproof bag ensures your belongings stay completely dry, providing the ultimate protection against water, dust, and dirt.

FEATURES

- 100% waterproof roll top backpack
- 35 litre capacity
- PVC-free waterproof fabric
- Sternum strap
- Side mesh water bottle pocket
- External essentials zipped pocket
- Elasticated bungee stash
- Attachment points on side



ATLANTIC BLUE



NEW BLACK GRAPHITE
COLOUR-WAY



Model	Description
DW-PBW/35BG	Explorer 35L, Waterproof, Black Graphite
DW-PBW/35AB	Explorer 35L, Waterproof, Atlantic Blue

Size	Description
35 Litre	D170mm x W300mm x H460mm (extended 720mm) Opening W440mm



55 LITRE DUFFLE BAG



27 LITRE DECK BAG



VENTURE BAG RANGE



55 LITRE DUFFLE BAG

NEW CARBON GREY
COLOURWAY

NEW

27 LITRE DECK BAG



NEW COLOUR

- Backpack for day adventures
- 27 litre capacity
- Heavy duty, lightweight nylon ripstop fabrics
- Breathable mesh back panel
- Sternum strap
- Side mesh water bottle pocket
- External attachment straps
- External essentials zipped pocket
- Internal padded laptop sleeve
- Internal zipped pocket

55 LITRE DUFFLE BAG



NEW COLOUR

- Cabin size duffle bag
- 55 litre capacity
- Heavy duty lightweight nylon ripstop fabrics
- Removable backpack straps
- Compression straps for reducing size when packed
- Large carry handle on top
- Four side carry/grab handles
- External essentials zipped pocket
- Internal large zipped mesh pocket
- ID pocket

100 LITRE KIT BAG



NEW COLOUR

- Kit bag for longer adventures
- 100 litre capacity
- Heavy duty lightweight nylon ripstop fabrics
- Internal and external compression straps for reducing size when packed
- Large carry handle on top (removable)
- Side carry/grab handles
- External essentials zipped pocket
- ID pocket

Model	Description
DW-PBS/27PB	Venture 27L, Deck Pack, Pacific Blue
DW-PBS/55PB	Venture 55L, Duffle Bag, Pacific Blue
DW-PBS/100PB	Venture 100L, Kit Bag, Pacific Blue
DW-PBS/27CG	Venture 27L Backpack, Carbon Grey & Black
DW-PBS/55CG	Venture 55L Duffle Bag, Carbon Grey & Black
DW-PBS/100CG	Venture 100L Kit Bag, Carbon Grey & Black

Size	Description
27 Litre	460 H x 300 W x 150 D mm
55 Litre	550 H x 350 W x 250 D mm (Cabin compliant, most airlines)
100 Litre	750 H x 350 W x 380 D mm

NEW TOTE BAGS

Reusable bags made from surplus rolls of fabric

These tote bags are designed with sustainability in mind. By repurposing leftover materials, we ensure nothing goes to waste while creating a product that's practical

FEATURES

Lightweight and compact - folds up small

Strong and durable

Last forever - Replacing single-use bags

Water resistant fabric

Height: 40cm / Width: 28cm / Depth: 13cm / Handle: 70cm

Model	Description
DW-PBT/BG	Black
DW-PBT/CB	Blue



NEW

WATERPROOF STORAGE BAG

COMPRESSIBLE ROLL TOP BAGS

NEW

FEATURES

15L and 25L dry bags with release valve for compression

Versatile and light

Roll top, waterproof* closure

One way valve allows the bag to compressed quickly, reducing the size of the bag

*dry bags do not provide submersible waterproof protection

WATERPROOFNESS	
WATER RESISTANT / WATERPROOF	SUBMERSIBLE
15L + 25L	X



Can be used to store multiple ALTO PFD on board

Model	Description
DW-PCD/15GY	15L Waterproof Dry Bag with release valve for compression
DW-PCD/25GY	25L Waterproof Dry Bag with release valve for compression

Size	Description
15 Litre	D 70cm x W 30cm x H 11cm
25 Litre	D 67cm x W 38cm x H 16cm



WING & FOIL 50N HIGH AGILITY FLOTATION PFD

TARGET USERS

Ideal for dinghies, keelboats, RIBs and watersport users

FEATURES

- 50N buoyancy
- Low profile with low snag body fit system
- Tapered high cut for action and mobility
- Front (FOIL) and Side (WING) zip models
- Articulated back panelling (FOIL)
- Double front pocket for additional security
- Dry coated elastic side panels to reduce water absorption
- Available in sizes S, M, L & XL
- WING available in XS



- Black Graphite (BG)
- Mercury Red (MR)

UKCA and CE approved
ISO12402-5 50N buoyancy Aid

COLOUR	BLACK GRAPHITE ●		MERCURY RED ●
	WING PFD SIDE ZIP	FOIL PFD FRONT ZIP	WING PFD SIDE ZIP
XS	DW-BA/SBG	-	DW-BA/SMR
S	DW-BA/S1BG	DW-BA/F1BG	DW-BA/S1MR
M	DW-BA/S2BG	DW-BA/F2BG	DW-BA/S2MR
L	DW-BA/S3BG	DW-BA/F3BG	DW-BA/S3MR
XL	DW-BA/S4BG	DW-BA/F4BG	DW-BA/S4MR

COMPATIBLE EMERGENCY BEACONS

The following devices have been tested and approved with the following Spinlock flotation products.

OCEAN SIGNAL MOB1

DW-MOB1

AIS Alert
DSC Alert
USA and ROW

Compatible Lifejackets

DURO SOLAS 275N
DURO SOLAS+ 275N
DURO+ 275N
DURO 170N & 275N
Deckvest VITO 170N & 275N
Deckvest VITO AFS
Deckvest 6D 170N & 275N
Deckvest LITE 170N
Deckvest LITE+ 170N & 275N
Deckvest CENTO 100N (Junior)



OCEAN SIGNAL MOB2

DW-MOB2

AIS Alert
DSC Alert
Class M Compliant

Compatible Lifejackets

DURO SOLAS 275N
DURO SOLAS+ 275N
DURO+ 275N
DURO 170N & 275N
Deckvest VITO 170N & 275N
Deckvest VITO AFS
Deckvest 6D 170N & 275N
Deckvest LITE 170N
Deckvest LITE+ 170N & 275N
Deckvest CENTO 100N (Junior)



OCEAN SIGNAL PLB3

DW-PLB/3

406 MHz distress signal
AIS Alert
DSC Alert
121.5 MHz Alert

Compatible Lifejackets

DURO SOLAS 275N
DURO SOLAS+ 275N
DURO+ 275N
Deckvest 6D 170N & 275N
Deckvest VITO 170N & 275N
Deckvest VITO AFS 170N



OCEAN SIGNAL M200

AIS Alert
DSC Alert
121.5 MHz Alert
Class M Compliant

Compatible Lifejackets

DURO+ 275N



ACR RESQLINK 450

DW-RQL400

406 MHz distress signal
AIS Alert
DSC Alert
121.5 MHz Alert

Compatible Lifejackets

DURO SOLAS 275N
DURO SOLAS+ 275N
Deckvest 6D 170N & 275N
Deckvest VITO 170N & 275N
Deckvest VITO AFS 170N



ACR PLB

406 MHz distress signal
121.5 MHz Alert
DSC Alert
USA and ROW

Compatible Lifejackets

DURO SOLAS 275N
DURO SOLAS+ 275N



SMRT V300 & SMRT ALERT

DW-MMRT/V300

AIS Alert
DSC Alert
121.5 MHz (not Alert model)
Water Activated
Class M Compliant

Compatible Lifejackets

DURO SOLAS 275N
DURO SOLAS+ 275N
DURO+ 275N
Deckvest 6D 170N & 275N



SMRT V300X

DW-MMRT/V300X

AIS Alert
DSC Alert
121.5 MHz
Water Activated
ATEX Compliant
Class M Compliant

Compatible Lifejackets

DURO SOLAS 275N
DURO SOLAS+ 275N
DURO+ 275N
Deckvest 6D 170N & 275N



WEATHERDOCK EASY2

AIS Alert
DSC Alert
121.5 MHz Alert
Water Activated
Class M Compliant

Compatible Lifejackets

DURO SOLAS 275N
DURO SOLAS+ 275N



UNIQUE AWARD-WINNING LIFEJACKET ILLUMINATION

LUME-ON™ LIFEJACKET BLADDER ILLUMINATION

FEATURES

2 flashing LED Lights (pair) illuminate the inflated lifejacket bladder to increase visibility and aid location

Water activated - waterproof (IP68)

Uses the inflated lifejacket bladder as diffuser to increase visibility

Compact design

Attaches and integrates only in lifejackets with separate bladder and cover construction. Sticks directly to underside of inflatable chamber

Retail packaged as a pair of self adhesive lights

Standard feature on Deckvest 6D and VITO

Multiple award winning product, including DAME design award 2015



EXCLUSIVE TO SPINLOCK

Model	Description
DW-LMN	Lume-On™ - Lifejacket Bladder Illumination x 2

PYLON™ THE ONLY LIFEJACKET LIGHT WITH ALL ROUND VISIBILITY

FEATURES

High visibility LED light

Compact, easily attachable lifejacket light


Raised 23cm antenna light significantly improves 360° visibility

Retrofits to other inflatable lifejackets with included hook and loop strap

Water activated with on/off switch

5 year shelf life

Exclusive to Spinlock

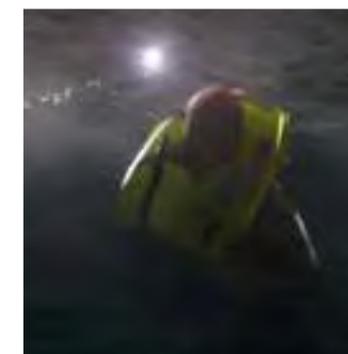

Model	Description
DW-PY/L1	1 Single retail unit
DW-PY/OEMBOX	PYLON Light - 24 units OEM (includes mounting band)

Approvals
Latest SOLAS MED and USCG Approvals Marine Equipment Directive
UK Merchant Shipping (Marine Equipment) Regulations 2016

SAFETY LINE CUTTER FOR CUTTING SAFETY LINE IN AN EMERGENCY

FEATURES

Fast emergency escape accessory for severing a safety line under load

With a guarded razor edge and stowed in a simple pouch worn on a lifejacket harness, the cutter is designed for severing safety lines under load

A/402 stainless steel blade, wax covered for protection

Provides the best protection against the risk of a safety line becoming unreleasable under load

By providing a reliable 'means of disconnection' anyone wearing the cutter satisfies ISAF and ORC recommendations, for all types of safety lines and all clips

Model	Description
DW-CTR	Safety Line Cutter



PERFORMANCE KNEEPADS LOW PROFILE IMPACT PROTECTION

Celebrating 15 years of the amazing knee pad we introduce a further refined design of our very popular kneepad. New materials and shaping coupled with great pricing ensure the Spinlock kneepad remains top of its class on the water and remains a top seller at retail. Expect to see new stock phased in from October on S and M sizes with L into 2026.

FEATURES

Slim and low profile design for ultimate long term comfort

High flex panelling – moves with the leg and knee to ensure the knee pad stays in place

High stretch, soft touch moulded foam provides patella support and protection

Extra tough 'Tatex' construction moulded outer fabric protection

Low volume back panelling prevents bulking

Available in 3 sizes: S, M and L

Extra grip - Sticky rubber compound increases grip in all conditions



Model	Description
DW-KPD/1	Kneepads - Small (pair)
DW-KPD/2	Kneepads - Medium (pair)
DW-KPD/3	Kneepads - Large (pair)

PERFORMANCE SAFETY LINES LIGHTWEIGHT SAFETY LINES

NEW

FEATURES

Safety Lines remain a stable product in the PROTECT category.

Always available, well priced at retail and a great addition to any lifejacket harness purchase. We introduce a new colour webbing Blue/Grey and jet black clip for 2026 with stock phased in through 2026.



DW-STR/1L/C
1 CLIP & 1 LOOP



DW-STR/2LE/C
1 CLIP, 1 LOOP, STRETCH



DW-STR/02E/C
2 CLIP STRETCH



DW-STR/3L/C
2 CLIP, 1 LOOP, STRETCH



DW-STR/03/C
3 CLIP, STRETCH



JET BLACK CLIP & NEW COLOURWAY



Model	Description
DW-STR/1L/C	1 Clip & 1 Link Performance Safety Line (1 metre length)
DW-STR/2LE/C	2 Clip Elasticated Performance Safety Line
DW-STR/02E/C	1 Clip & 1 Link Elasticated Performance Safety Line
DW-STR/3L/C	3 Clip Elasticated Performance Safety Line
DW-STR/03/C	2 Clip & 1 Link Elasticated Performance Safety Line

UKCA and CE Approved ISO12401 UIAA 121 Approved



DECK PRO REVOLUTIONARY DECK SAFETY HARNESS

FEATURES

- Ultra lightweight and comfortable design
- Easy to fit with quick adjust 'double back' twin buckles in marine grade stainless steel
- Soft loop tether attachment in high tensile webbing
- Shoulder straps shaped towards the centre of the chest, for exceptional comfort and freedom of movement
- 'S' Cutter accessory pocket
- Chest size adjustment 72-128cm (29-49")




UKCA and CE approved ISO 12401

Model	Description
DW-DPH	Deck Pro





MAST PRO MAST CLIMBING HARNESS

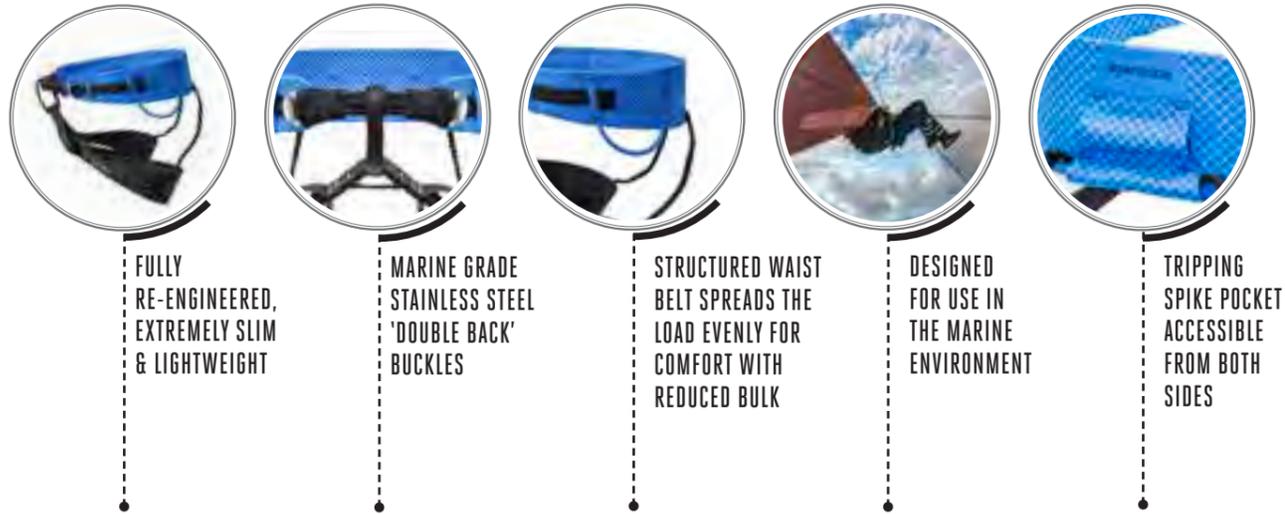

MAST PRO NEXT GENERATION MAST HARNESS

FEATURES

- Re-engineered for improved comfort
- Extremely lightweight minimal design
- Super slim, structured waist belt spreads the load evenly over its full width, for comfort with reduced bulk
- Unique Ratchet-Fit™ adjustment on leg straps for a secure, easy fit
- Marine grade stainless steel 'double-back' buckles
- Tripping spike pocket - accessible from both sides
- User replaceable leg strap elastics
- Tool attachment points
- Spinlock FID tripping spike available
- Compatible with Tool Pack

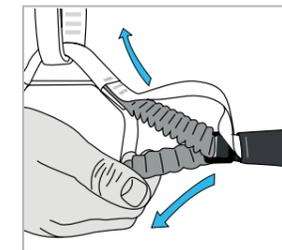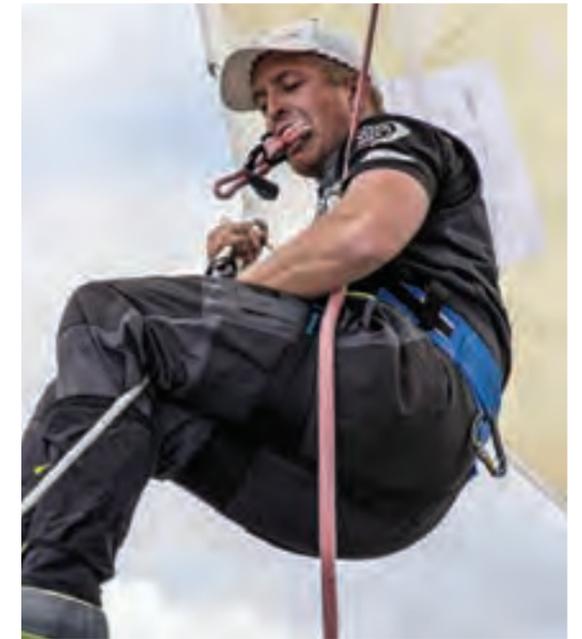


Ratchet Fit™ leg adjustment

 Cobalt Blue

UKCA and CE approved
0120 Type C - EN12277

Model	Description
DW-MPH	Mast Pro Harness

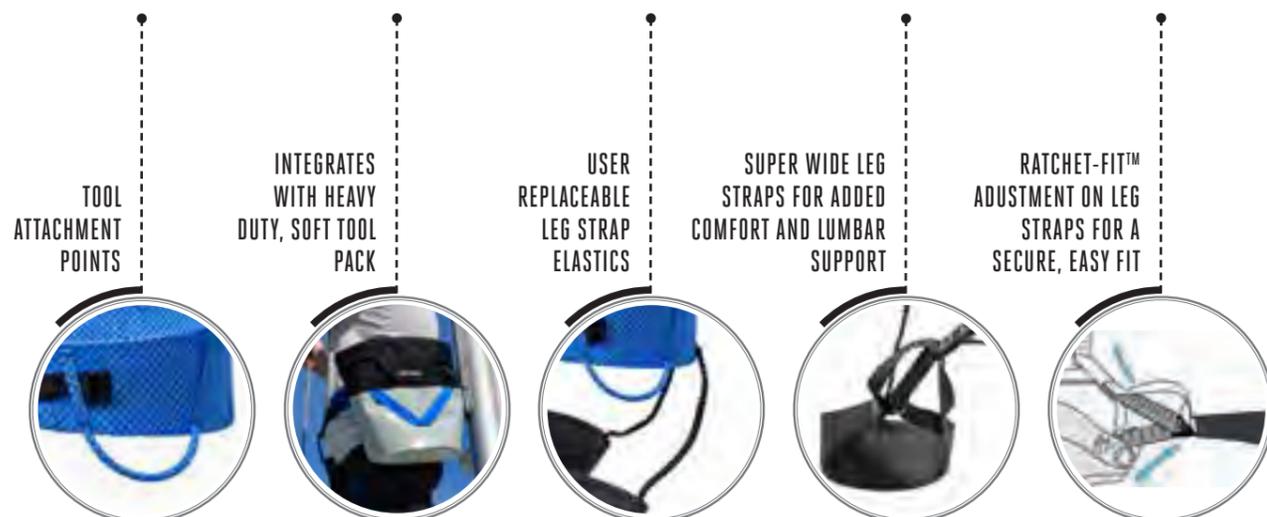

TOOL PACK HEAVY DUTY SOFT TOOL BUCKET

- Heavy duty soft tool bucket for carrying large items aloft
- Designed to work in conjunction with the Spinlock Mast Pro
- Large enough for power tools, hammers, and range of hand tools
- Hard-wearing PU coated fabric
- Internal pocket for small items
- Lash points for tool security
- Light coloured lining aids visibility of contents



Model	Description
DW-PCT	Tool Pack

MAST FLOAT SIMPLE TO USE FOR DINGHY MASTS



Responding to a market gap for a better product at a better price, we introduce a range of Dinghy Mast Floats.

Simple to use, Mast Floats are either tied to the head of the sail or hoisted in the mast track. Available in 5L and 20L buoyancy, Mast Float can be joined together to provide additional buoyancy.

Appealing to sailing schools, beach resorts and sailors in fleets still learning and developing skills, Mast Float provides buoyancy when capsized to reduce the risk of mast inversion.

FEATURES

- Universal valve for pump inflation
- Quick inflation and deflation
- Simple to attach
- Toggles for combining Mast Float together to increase buoyancy
- Robust and hard wearing for long life
- Highly visible fabric aids instructors and coaches
- Mast Track Tag allows for added security when fitting large or double floats



Model	Description
DW-MF/5	Mast Float 5L
DW-MF/20	Mast Float 20L (includes tag)
DW-MF/TT	Mast Float Track Tag



USCG
AND TRANSPORT CANADA*
APPROVED

*WHERE SHOWN





DECKVEST LITE USCg

ULTRA-LIGHTWEIGHT 160N AUTOMATIC LIFEJACKET



FEATURES

- Clean, contemporary design
- Designed for the perfect fit - every time
- Lightweight low profile design
- Durable honeycomb ripstop cover fabric
- 160N (36lbs) buoyancy
- One size
- Webbing end tidy
- Single crotch strap with recessed clip reduces risk of snagging
- Muted highly reflective panel detail
- Clipping area for PLB / VHF
- Attachment point for optional sprayhood
- Attachment point for Chest Pack
- Attachment point for kill cord or VHF leash
- Window for checking firing head status
- Neoprene neck panel for added comfort
- Optional Lume-On™ bladder illumination lights
- Optional Pylon™ 360 degree lifejacket light



- Black Graphite (R)
- Pacific Blue (RPB)
- Bleach White (RBW)



Part No. Description

DW-LCG/R	Deckvest LITE USCg, Black
DW-LCG/RPB	Deckvest LITE USCg, Pacific Blue
DW-LCG/RBW	Deckvest LITE USCg, Bleach White


Approvals

UL 1180 Approved
TYPE II USCg PFD

Optional Fitting

DW-SHD/170-F	Sprayhood LITE Fitted
DW-PYL/L1-F	Pylon™ SOLAS approved lifejacket light Fitted
DW-LMN-F	Lume-On™ Bladder illumination lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-MOB/2-F	Ocean Signal MOB2 AIS Beacon Unit Fitted
DW-RAR/33G	Re-arming kit for Deckvest LITE USCg 170N



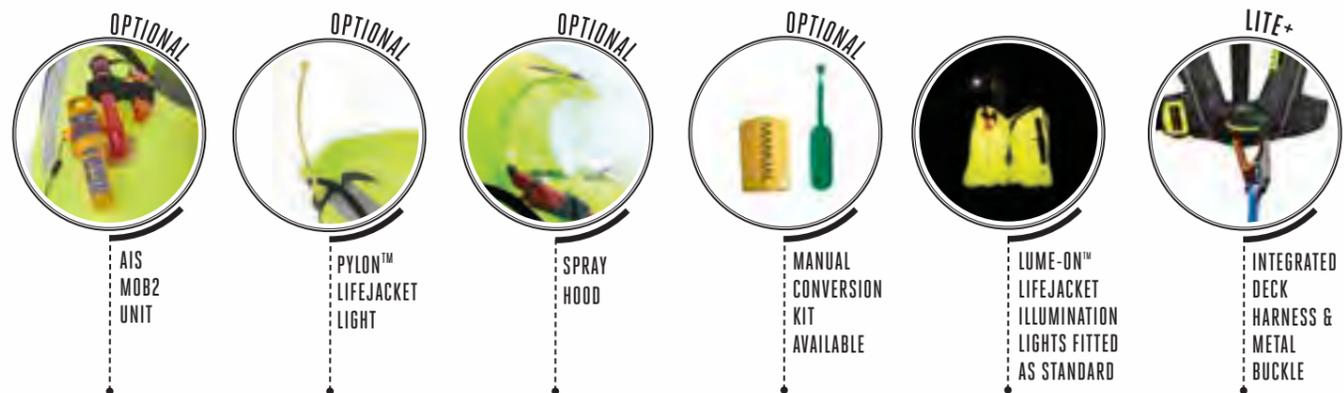

FEATURES

USCG Approved, Deck Harness version of the popular Deckvest LITE Lifejacket Harness with soft loop safety line clipping point
 160N (36lbs) buoyancy
 Fitted with Lume-On™ bladder illumination lights
 Optional Pylon™ 360 degree lifejacket light
 Quick and easy to use anodised buckle
 Designed for the perfect fit - every time
 Lightweight low profile design
 Durable honeycomb ripstop cover fabric
 Halkey Roberts Hydro 1F Automatic inflator
 One size
 Window for checking firing head status
 Single crotch strap with recessed clip reduces risk of snagging
 Clipping area for PLB / VHF
 Attachment point for optional Sprayhood
 Attachment points for optional Chest Pack
 Attachment point for kill cord or VHF leash
 Webbing end tidy
 Through Life Support (TLS) Registration extends product warranty to 5 years



● Black (R)

Part No. Description


DW-LCGH/R	Deckvest LITE+ USCG Lifejacket Harness, Black
-----------	---

Approvals

UL 1180 Approved
 TYPE II USCG PFD Meets ISO 12401 Deck safety harness standard
 TYPE V with TYPE II Performance.

Optional Fitting

DW-SHD/170-F	Sprayhood LITE Fitted
DW-PYL/L1-F	Pylon™ SOLAS approved lifejacket light Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-MOB/2-F	Ocean Signal MOB2 AIS Beacon Unit Fitted

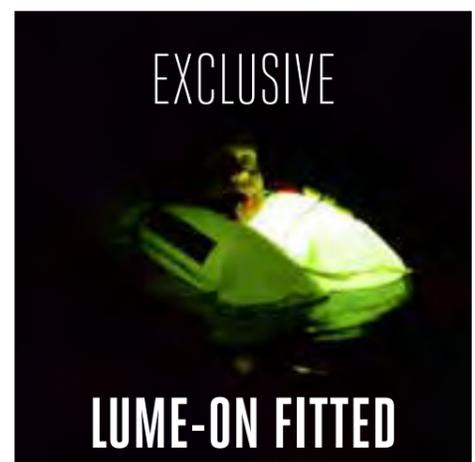

Includes Spinlocks revolutionary Lume-On™ bladder illumination as standard



NEW

DECKVEST NEMO & NEMO+

INFANT & CHILD LIFEJACKET RANGE



FEATURES

- Soft neck panels to reduce chafing
- Easy attach and adjust buckle for security
- Padded secure leg strap to hold the jacket in place
- Simple zip access for easy donning
- Whistle for alerting attention
- High-volume buoyancy with a supporting collar ensures that children will be turned over and the head supported out of the water even if they are non-swimmers
- NEMO:** One junior size for children weighing 15-30kg. Please note, children's lifeackets are best fitted by weight
- NEMO** has grab handle on the top of the neck
- NEMO+** Two Junior Sizes Infant <15kg and Child 15-30kg. Please note, children's lifeackets are best fitted by weight
- NEMO+** The harness point is positioned on the back to keep the safety line clear of the child, ensuring small hands stay safely out of the way
- NEMO+** has a front hand-only grab handle for adults to lift the child to safety, cleverly designed to reduce any snagging risk



NEMO+

NEMO

DECKVEST NEMO+ INFANT & CHILD LIFEJACKET



FRONT HANDLE

Front handle is a grabbing and lifting point only

BACK HARNESS

ISO12401 Certified rear harness attachment point. Back harness attachment point can be used in conjunction with a safety line

MODEL	SIZE	BUOYANCY	WEIGHT	CHEST
DW-CNMUH/1	Infant	45N	<15kg	40-50cm
DW-CNMUH/2	Child	60N	15kg - 30kg	45-50cm
DW-CNMU/2	Child	60N	15kg - 30kg	45-60cm

Model	Description
DW-CNMUH/1	Deckvest NEMO+ USCG 150N Lifejacket, Infant
DW-CNMUH/2	Deckvest NEMO+ USCG 150N Lifejacket, Child
DW-CNMU/2	Deckvest NEMO USCG 150N Lifejacket, Child

USCG and Transport Canada Approved
 UL 12402-5 – 70N Lifejacket (NEMO)
 UL 12402-4 - 100N Lifejacket (NEMO+)
 ISO 12401 Deck Harness (NEMO+)



ALTO BELT PACK 75N WAIST-WORN FLOTATION AID



Designed for a range of watersports, the ALTO is a lightweight, compact, inflatable flotation device worn around the waist. Simple, discrete easy to use emergency inflation. Manually operated, the inflatable tube is released from the waist pack and then supports the user under the arms and around the chest. ALTO offers users such as SUP, fishermen and boaters, a simple and easy to use inflatable pack that feels invisible when worn.

FEATURES


- Large 75N of emergency buoyancy
- Compact and lightweight adjustable waist belt for a simple, close fit
- Can be worn on front or back
- Manually activated Halkey Roberts firing head and 16g Cylinder

NEW USCG & TC APPROVED MODEL

Model	Description
DW-ATU/M75	ALTO USCG 75N Flotation Aid (Black)
DW-ATU/M75/MR	ALTO USCG 75N Flotation Aid (Mercury Red)
DW-ATU/M75/FO	ALTO USCG 75N Flotation Aid (Fluro Orange)
DW-ATU/M75/CY	ALTO USCG 75N Flotation Aid (Citrus Yellow)
DW-ATU/M75/AB	ALTO USCG 75N Flotation Aid (Atoll Blue)

Rearming Kit	
DW-RAK/75	ALTO rearming kit (2 x 16g CO2 & 2 x manual clips)
Optional Fitting	
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted

USCG and Transport Canada Approved
UL 12402-5 – 70N Buoyancy Aid

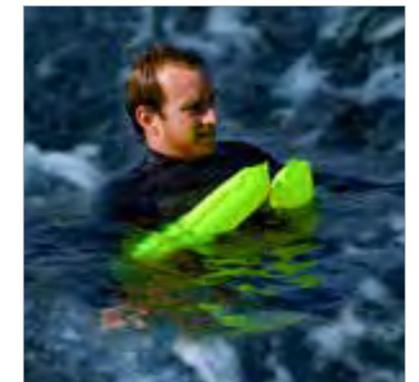



COMMERCIAL
INSPIRING CONFIDENCE



DURO SOLAS

SOLAS APPROVED 275N TWIN CHAMBER LIFEJACKET

Our popular DURO SOLAS 275N lifejacket has been engineered for demanding use and conditions with a heavy-duty, durable outer cover. An improved buckle system ensures easy donning, ultimate comfort and fit.

FEATURES

- Heavy duty outer cover
- UK Merchant Shipping (Marine Equipment Regulations 2016) Red Ensign
- Approval to latest 2010 SOLAS standard
- 275N (62 lbs) Buoyancy twin chamber lifejacket
- Structured shape and body for ultimate comfort and agility
- Single Belt adjustment with single crotch strap
- Compatible with most fall-arrest harness models
- VHF clipping point on shoulder
- Twin automatic inflation: UML Mk5, 2 x 60g CO2 cylinders
- Unique bladder shape lifts and supports body higher when in water
- Pylon™ SOLAS Approved life jacket light included
- Designed to be worn for extended periods of time in conjunction with other kit
- Heavy duty zip closure with protective covers
- Floating 'Buddy Line'
- Logo printing available
- Window pocket for ID/asset tracking

OPTIONAL FITTING

- Lume-On™ Bladder Illumination Lights
- Sprayhood
- AIS MOB1 & MOB2 Beacon Unit
- Pro-Tech Protective Cover
- Chest Pack



Model	Description
DW-SLS/A	DURO SOLAS Twin Chamber 275N lifejacket
Optional Fitting	
DW-SHD/SLS-F	SOLAS 275N Sprayhood Fitted
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-MOB/2-F	Ocean Signal MOB2 AIS Beacon Unit Fitted

- UKCA
- CE Approved
- 2010 SOLAS MSC200 (80)
- ISO12402-2 275N Lifejacket
- ISO 12402-6 Special application lifejackets

PRO-TECH HEAVY DUTY PROTECTIVE COVER

Heavy duty coated polyester cover for Spinlock Lifejackets. For use in dirty work operations like painting / jet washing: provides a resistant barrier where contaminants such as paint, oils and chemicals can quickly damage a lifejacket.

TARGET USERS

Commercial marine users who need to prolong the life of a lifejacket

FEATURES

Heavy duty cover for Spinlock Lifejackets

Provides some protection against sharps which can compromise lifejacket bladders

Designed to integrate with the DURO and DURO SOLAS lifejackets

Offers a low cost solution to prolong lifejacket life



Model	Description
DW-TEC	Pro-Tech Heavy Duty Protective Cover



PRO-TECH WELD HEAVY DUTY PROTECTIVE COVER FOR WELDING WORK

NEW

Heavy duty, fire retardant and welding protective cover tailored to fit DURO & DURO SOLAS models.

Attachment method: Velcro and Adjuster buckle. Magnetic in front closure

TARGET USERS

Commercial marine users who need to prolong the life of a lifejacket and require resistant barrier to help prevent damage to lifejackets.


FEATURES

Heavy duty cover for Spinlock Lifejackets

Provides some protection against sharps which can compromise lifejacket bladders

Designed to integrate with the DURO and DURO SOLAS lifejackets

Offers a low cost solution to prolong lifejacket life

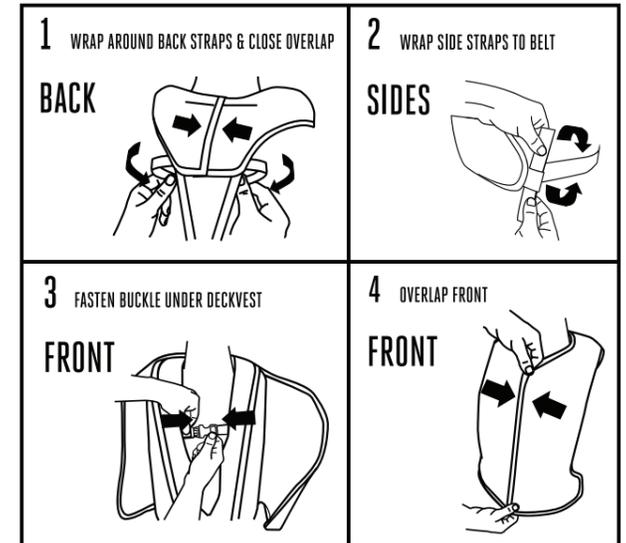


Model	Description
DW-TEC/WP	Pro-Tech Weld, Protective Deckvest Cover

Approvals
ISO 12402-8
Fabric approved to ISO 9150:1988

DURO SOLAS & DURO SOLAS+


SOLAS APPROVED 275N TWIN CHAMBER LIFEJACKET

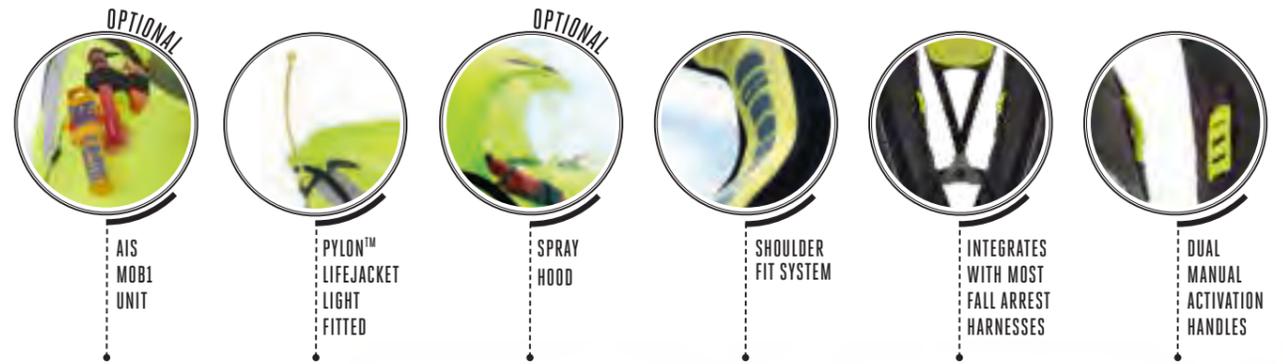

OPTIONAL



OPTIONAL



NEW SOLAS+ WITH DECK HARNESS





DURO SOLAS+

SOLAS APPROVED 275N TWIN CHAMBER LIFEJACKET WITH DECK HARNESS

Our popular DURO SOLAS 275N lifejacket has been engineered for demanding use and conditions with a heavy-duty, durable outer cover. The DURO SOLAS+ features an approved deck harness with rear attachment option. An improved buckle system ensures easy donning, ultimate comfort and fit. With a unique rear harness attachment point option to reduce the interference of the safety line in work situations

FEATURES

Approval to latest 2010 SOLAS standard

UK Merchant Shipping (Marine Equipment Regulations 2016) Red Ensign

275N (62 lbs) Buoyancy twin chamber lifejacket

Integrated ISO 12401 Deck Harness

Structured shape and body for ultimate comfort and agility

Compatible with most fall-arrest harness models

Extra wide single crotch strap for ease of use

Soft loop deck harness for Safety Line attachment

Optional Rear Harness attachment point moves harnessing point to the back of the jacket

VHF Clipping point on Shoulder

Twin automatic inflation: UML Mk5, 2 x 60g CO2 cylinders

Unique bladder shape lifts and supports body higher when in water

Pylon™ SOLAS approved life jacket light included

Designed to be worn for extended periods of time in conjunction with other kit

Heavy duty zip closure with protective covers

Floating 'Buddy Line'

Logo printing available

Window pocket for ID/asset tracking



LATEST SOLAS APPROVAL

UKCA
 CE Approved
 ISO 12402-2 275N Lifejacket
 ISO 12402-6 Special application lifejackets
 ISO 12401 Deck Harness (front and rear option)
 2010 SOLAS MSC200 (80)
 UK Merchant Shipping (Marine Equipment Regulations 2016)
 Red Ensign

Model	Description
DW-SLH/A	DURO SOLAS Twin Chamber 275N lifejacket
Optional Fitting	
DW-SHD/SLS-F	SOLAS 275N Sprayhood Fitted
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-MOB/2-F	Ocean Signal MOB2 AIS Beacon Unit Fitted
DW-RHA/F	Rear harness attachment point fitted



DURO COMPACT, FRONT OPENING 170N & 275N LIFEJACKET

TARGET USERS

Suitable option for all industrial users including SAR, Fishing, Construction, Canal and Barge, Tug and Work Boat

FEATURES

Designed to withstand the demands of tough environments

170N and 275N Versions (38lbs and 62lbs) buoyancy

Extra durable cover materials for a long life

Lightweight, low profile, compact design with easy side donning

One size

Straps with soft rear moulding reduces twisting and aids adjustment

Double crotch strap with recessed clip reduces risk of snagging

Attachment webbing point for VHF on shoulder

Clear pocket for identification card

Branded printing available

Attachment point for optional sprayhood (see page 90-91)

Attachment point for optional Chest Pack (see page 86)

Attachment for kill cord or VHF leash

Automatic Inflation - UML Pro Sensor Elite as standard with clear indicator status window

INFLATION SYSTEM

Fitted with Pro Sensor ELITE as Standard but can be specified with UML MK5 if required




- Black 170N & 275N
- Fluro Orange (FO) 275N only



Model	Description
DW-LTDFC/A170	Deckvest DURO Front Closing 170N Black
DW-LTDFC/A275	Deckvest DURO Front Closing 275N Black
DW-LTDFC/A275FO	Deckvest DURO 275N Front Closing Fluro Orange
Optional Fitting	
DW-MOB/1-F	Ocean Signal MOB1 Unit Fitted
DW-MOB/2-F	Ocean Signal MOB2 AIS Beacon Unit Fitted
DW-PY/L1-F	Pylon Lifejacket Light Fitted
DW-LMN-F	Lume-On™ Lifejacket Bladder Illumination x 2 Fitted
DW-SHD/170-F	Deckvest DURO Sprayhood Fitted, 170N
DW-SHD/275-F	Deckvest DURO Sprayhood Fitted, 275N
DW-TEC-F	Pro-Tech Protective Cover Fitted

- UKCA
- CE Approved
- ISO 12402-3 - 150N Lifejacket
- ISO 12402-2 - 275N Lifejacket
- ISO 12402-6 - Special application lifejackets

DURO+ 275N COMMERCIAL LIFEJACKET WITH SAFETY HARNESS

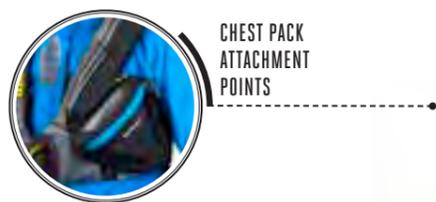

DURO+ 275N COMMERCIAL LIFEJACKET WITH SAFETY HARNESS

Based on our Deckvest 6D, the new DURO+ offers commercial marine users the ultimate in comfort and fit.

The DURO+ has an ISO approved deck safety harness with the option of the innovative Harness Release System for emergencies

FEATURES

- Designed to withstand the demands of tough environments
- 275N (62lbs) buoyancy
- Extra durable cover materials for a long life
- Low profile, compact design
- Chest and back adjustment for easy fit every time
- VHF clipping point on shoulder
- One size
- Single crotch strap with recessed clip reduces risk of snagging
- Cover window for CO2 Cylinder & Firing Head visual status
- ID and Asset Track Pocket
- Now available with optional Harness Release System (HRS)
- Optional Rear Harness Attachment
- Manual-Only version available in mid 2025 (DW-LTDH/M275)



Model	Description
DW-LTDH/A275	DURO+ 275N lifejacket
Optional Fitting	
DW-SHD/275-F	Sprayhood for 275N Deckvest 5D, Duro
DW-PYL/L1-F	Pylon™ Lifejacket light Fitted
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Unit Fitted
DW-MOB/2-F	Ocean Signal MOB2 AIS Beacon Unit Fitted
DW-RHA-F	Rear harness attachment point fitted
DW-CTR	Safety Line Cutter
DW-LTDH/M275	275N Deckvest Duro+ Lifejacket Harness (Black)

CE Approved
 ISO12402-2 275N Lifejacket
 ISO12401 Deck Harness (front and rear option)

PROTECT UPGRADES & SPARES MATRIX

A complete reference matrix of Spinlock lifejacket spares and upgrade kits, enabling precise identification for servicing, replacements, and compatibility across models. If you have any questions, please email prosupport@spinlock.co.uk for assistance.

BUOYANCY AID	PRODUCT	RE-ARMING KIT	SPRAYHOOD	CO2 CYLINDER	CROTCH STRAP	MANUAL CONVERSION KIT	FIRING CAP	PYLON LIGHT	LUME-ON LIGHTS	DECK HARNESS	SAFETY LINE CUTTER	SPARE BUCKLE	ZIP REPAIR KIT	COMPATIBLE BEACONS	NOTES
	ALTO (ISO/USCG/TC)	DW-RAK/75	N/A	DW-CYD16	N/A	N/A	N/A	N/A	DW-LMN	NO	N/A	N/A	N/A	N/A	DW-RAK/75 includes 2 x 16g cylinders
KIDS	Deckvest CENTO	DW-RAK/100	DW-SHD/100	DW-CYD20	N/A	DW-MAK	DW-UML5	DW-PY/L1	DW-LMN	YES	DW-CTR	N/A	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2	
LIFEJACKETS	Deckvest 6D 170N	DW-RAK/E170	DW-SHD/170	DW-CYD33	N/A	N/A	DW-UMLE	DW-PY/L1	DW-LMN	YES	DW-CTR	DW-BKL38	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2, Ocean Signal PLB 3, sMRT V300, sMRT V300-X1	When fitting a MOB1 to any compatible Deckvest lifejacket, a DW-MOB/RELEASEKIT may be required if the MOB1 wasn't purchased directly from Spinlock.
	Deckvest 6D 275N	DW-RAK/E275	DW-SHD/275	DW-CYD60	N/A	N/A	DW-UMLE	DW-PY/L1	DW-LMN	YES	DW-CTR	DW-BKL38	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2, Ocean Signal PLB 3, sMRT V300, sMRT V300-X1	
	Deckvest VITO AFS 170N	DW-RAH/V170	N/A	DW-CYD33	N/A	DW-HMAK	N/A	DW-PY/L1	DW-LMN	YES	DW-CTR	DW-BKL38	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2, Ocean Signal PLB 3	
	Deckvest LITE 170N	DW-RAK	DW-SHD/170	DW-CYD33	DW-DTS/L	DW-MAK	DW-UML5	DW-PY/L1	DW-LMN	NO	N/A	N/A	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2	
	Deckvest LITE+ 170N	DW-RAK	DW-SHD/170	DW-CYD33	DW-DTS/L	DW-MAK	DW-UML5	DW-PY/L1	DW-LMN	YES	DW-CTR	N/A	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2	
	Deckvest LITE+ 275N	DW-RAK/275	DW-SHD/275	DW-CYD60	DW-DTS/L	DW-MAK	DW-UML5	DW-PY/L1	DW-LMN	YES	DW-CTR	N/A	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2	
USCG	USCG Deckvest LITE 160N	DW-RAR/33G	DW-SHD/170	DW-CYD33	DW-DTS/LCG	DW-RMAKH	DW-UMLE	DW-PY/L1	DW-LMN	NO	N/A	N/A	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2	For pre-2019 models choose DW-RMAK
	USCG Deckvest LITE+ 160N	DW-RAR/33G	DW-SHD/170	DW-CYD33	DW-DTS/LCG	DW-RMAKH	DW-UMLE	DW-PY/L1	DW-LMN	YES	DW-CTR	N/A	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2	For pre-2019 models choose DW-RMAK
INDUSTRIAL	DURO 170N	DW-RAK	DW-SHD/170	DW-CYD33	DW-DTS/SLS	N/A	DW-UMLE	DW-PY/L1	DW-LMN	NO	N/A	DW-BKL38	DW-ZPL/8	Ocean Signal MOB1, Ocean Signal MOB2	
	DURO 275N	DW-RAK/275	DW-SHD/170	DW-CYD60	DW-DTS/SLS	N/A	DW-UMLE	DW-PY/L1	DW-LMN	NO	N/A	DW-BKL38	DW-ZPL/8	Ocean Signal MOB1, Ocean Signal MOB2	
	DURO+ 275N	DW-RAK/275	DW-SHD/SLS	DW-CYD60	DW-DTS/SLS	N/A	DW-UMLE	DW-PY/L1	DW-LMN	YES	DW-CTR	DW-BKL38	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2, Ocean Signal M200, Ocean Signal PLB 3, sMRT V300, sMRT V300-X1	
	DURO SOLAS 275N	DW-RAK/275	DW-SHD/SLS	DW-CYD60	DW-DTS/SLS	N/A	DW-UMLE	DW-PY/L1	DW-LMN	NO	N/A	DW-BKL38	DW-ZPL/8	ACR RescueLink PLB, ACR ResQlink 450, Ocean Signal MOB1, Ocean Signal MOB2, Ocean Signal M100, Ocean Signal PLB 3, sMRT V300, sMRT V300-X1, Weatherdock Easy2	For DURO SOLAS, 2 x 60g cylinders may be required
	DURO SOLAS+ 275N	DW-RAK/275	DW-SHD/SLS	DW-CYD60	DW-DTS/SLS	N/A	DW-UMLE	DW-PY/L1	DW-LMN	YES	DW-CTR	DW-BKL38	DW-ZPL/8	ACR RescueLink PLB, ACR ResQlink 450, Ocean Signal MOB1, Ocean Signal MOB2, Ocean Signal M100, Ocean Signal PLB 3, sMRT V300, sMRT V300-X1, Weatherdock Easy2	For DURO SOLAS, 2 x 60g cylinders may be required
DISCONTINUED	Deckvest 5D (pre-2018)	DW-RAK/170	DW-SHD/170	DW-CYD33	DW-DTS/5D2	DW-MAK	DW-UML5	DW-PY/L1	DW-LMN	YES	DW-CTR	N/A	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2	
	Deckvest 5D (post-2018)	DW-RAK/275	DW-SHD/275	DW-CYD60	DW-DTS/5D2	N/A	DW-UMLE	DW-PY/L1	DW-LMN	YES	DW-CTR	N/A	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2	
	Deckvest 5D Hammar (Pre-2018)	DW-RAH/275	DW-SHD/275	DW-CYD60	DW-DTS/5D2	DW-MAK	DW-UML5	DW-PY/L1	DW-LMN	YES	DW-CTR	N/A	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2	
	Deckvest VITO 170N	DW-RAH/V170	DW-SHD/170VT	DW-CYD33	DW-DTSL	DW-HMAK	N/A	DW-PY/L1	DW-LMN	YES	DW-CTR	DW-BKL38	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2, Ocean Signal PLB 3, sMRT V300, sMRT V300-X1	
	Deckvest VITO 275N	DW-RAH/V275	DW-SHD/275VT	DW-CYD60	DW-DTSL	DW-HMAK	N/A	DW-PY/L1	DW-LMN	YES	DW-CTR	DW-BKL38	DW-ZPL	Ocean Signal MOB1, Ocean Signal MOB2, Ocean Signal PLB 3	



Pro Sensor ELITE inflator

UML PRO SENSOR ELITE INFLATOR FOR DECKVEST 6D 170N / 275N, DURO & DURO+

The Pro Sensor Elite® Automatic Inflator replaced the Pro Sensor® Automatic Inflator late in 2018: 13mm shorter and 4 grams lighter than the original Pro Sensor® Automatic Inflator. ProSensor Elite units have a Green/Red indicator for the cylinder and auto cartridge

All UML systems use a compressed paper capsule that dissolves in water releasing a spring to puncture the gas cylinder

UML Elite auto caps will not fit other UML units, UML Elite firing cap must be used



UML Mk5 Inflator

UML MK5 AUTOMATIC INFLATOR FOR DECKVEST LITE, LITE+, CENTO & SOLAS

The cap is designed so that only water flowing upwards through the unit will cause it to activate

Water, spray and rain running downwards will not cause activation

Benefits

Very reliable

Easy to check and re-arm

3 year replacement date printed on firing cap

UML Rearming kits are inexpensive and stocked by most marine stores

Easy to convert to 'manual firing' only



Halkey Roberts Inflator

HALKEY ROBERTS HYDRO 1F AUTOMATIC INFLATOR FOR DECKVEST LITE AND LITE+ USCG ONLY

Benefits

Very reliable

Easy to check and re-arm

Splash and humidity resistant

Rearming kits are inexpensive and stocked by most marine stores



Hammar MA1 Inflator

HAMMAR® INFLATOR HEAD FOR DECKVEST VITO

The Hammar system is activated by water pressure and will not inflate until the cap is approximately 10cm under water

Benefits

Will not inflate accidentally in very wet conditions

Cylinder is glued to firing head so will not work loose

Cylinder is contained inside the bladder so will not corrode

Single indicator clearly shows if unit is armed

5 year expiry date printed on firing head

PRODUCT	WEIGHT
Deckvest 6D 170N	1300g (2lb 9oz)
Deckvest 6D 275N	1600g (3lb 5oz)
Deckvest VITO AFS 170N	1200g (2lb 6oz)
Deckvest LITE and LITE+ 170N	860g (1lb 14.3oz)
Deckvest LITE+ 275N	1200g (2lb 16oz)
Deckvest LITE & LITE+ USCG	850g (1lb 8oz)
Deckvest CENTO	720g (1lb 9.4oz)
Deckvest NEMO	Child 580g
Deckvest NEMO+	Infant 640g Child 740g
WING	470g (1lb 0.6oz)
FOIL	470g (1lb 0.6oz)
ALTO Belt Pack & Alto USCG	376g (13.3oz)
Waterproof Packs	Small: 40g Medium: 60g Large: 80g
EXPLORER Pack Range	2 Litre: 180g 35 Litre: 920g
VENTURE Pack Range	27 Litre: 680g 55 Litre: 800g 100 Litre: 880g
DURO 170N	1015g (2lb 3.8oz)
DURO 275N	1305g (2lb 14oz)
DURO+	1650g (3lb 10.2oz)
DURO SOLAS	2002g (4lb 6.6oz)
DURO SOLAS +	2005g (4lb 6.7oz)
Lume-On™	14g (0.5oz)
Pylon™ Light	37g (1.3oz)
Safety Lines: DW-STR/03/C	565g (19.93oz)
Safety Lines: DW-STR/02E/C	367g (12.95oz)
Safety Lines: DW-STR/2LE/C	245g (8.64oz)
Safety Lines: DW-STR/3L/C	414g (14.60oz)
Kneepads	136g pair (4.8oz)
Chest Pack	83g (2.9oz)
Belt Pack	80g (2.8oz)
Side Pack (including bottle)	160g (5.6oz)
Tool Pack	440g (15.5oz)
Deck Pro	581g (1lb 4.5oz)
Mast Pro	445g (15.6oz)

ALTO

ONE SIZE
WAIST MEASUREMENT: 70-145cm (27.5 - 57 inches)
WEIGHT: OVER 40KG

DECKVEST CENTO

ONE SIZE
CHEST MEASUREMENT: 60-90cm (23.5-35.5 inches)
WEIGHT: 20-50KG
For juniors aged approximately 8-15 years old

DECKVEST NEMO & NEMO+

TWO JUNIOR SIZES
INFANT UP TO 15KG - CHEST 40-60cm
CHILD 15-30KG - CHEST 45-60cm
Aged approximately 2 to 8 years old

DURO

ONE SIZE
CHEST MEASUREMENT: 60-145cm (23.5-57 inches)
WEIGHT: OVER 50KG

DURO SOLAS - DURO SOLAS+

ONE SIZE
CHEST MEASUREMENT: 60-175cm (23.5-69 inches)
WEIGHT: OVER 43KG

DURO+

ONE SIZE
CHEST MEASUREMENT: 60-145cm (23.5-57 inches)
WEIGHT: OVER 50KG

DECKVEST VITO AFS

ONE SIZE
CHEST MEASUREMENT: 80-145cm (31.5-57 inches)
WEIGHT: OVER 50KG

DECKVEST 6D

ONE SIZE
CHEST MEASUREMENT: 60-150cm (23.5-59 inches)
WEIGHT: OVER 50KG

DECKVEST LITE & LITE+

ONE SIZE
CHEST MEASUREMENT: 60-145cm (23.5-57 inches)
WEIGHT: OVER 50KG

WING & FOIL

XS 25-40kg 35N	S 40-60kg 40N
76-85cm 30-32"	86-96cm 33-37"
M 60-70kg 45N	L 70kg+ 50N
97-106cm 38-41"	107-116cm 42-45"
XL 70kg+ 50N	
117-132cm 46-52" Chest Measurement	

KNEE PADS

S 34-42cm 13½-16½"
DW-KPD/1
M 40-48cm 15½-18½"
DW-KPD/2
L 46-56cm 18-22"
DW-KPD/3





SENSE
ENHANCING PERFORMANCE



SENSE LOAD CELLS MOBILE DATA TESTING



Simple, soft loop attachment offers fast connection to any application, for quick load measurement

Loads up to 20000kg (44092lbs)



LWS works with LOAD SENSE App



ZS-LOOP

FEATURES

Actual loads often vary widely from design loads

Robust design with protective bumper to prevent damage to both Load Sense and other equipment

Load-Sense range offers the ability to quickly and easily confirm actual working loads, refine deck hardware, rope selection, sail choice and even sail trim

Ultra compact and designed to be quickly attached between any two loaded points

Data displayed and record wirelessly via free Load-Sense App IOS and Android

Custom load-limit alarms to ensure important data is not missed

Continuous real time 'Actual' and 'Peak' read out with trend graph

Peak Load displayed both during and after the session

Overall accuracy 0.5% of full scale

Rated to IP67, protected against short term immersion in water

Attachment loops available: ZS-LOOP/5 and ZS-LOOP/10



LWS with ZS Loop



Model	Description
LWS/5	Load-Sense W - Wireless Sense with wireless read out connection only, 5T maximum mobile load cell (No Display)
LWS/10	Load-Sense W - Wireless Sense with wireless read out connection only, 10T maximum mobile load cell (No Display)
LWS/20	Load-Sense W - Wireless Sense with wireless read out connection only, 20T maximum mobile load cell (No Display)
ZS-LOOP/5	5 Tonne Loop
ZS-LOOP/10	10 Tonne Loop



FEATURES

Rig-Sense Pro joins the massively successful Rig-Sense range where we find an increasing number of professional users, measuring and recording loads.

Increasingly, professional users are needing to demonstrate that rigging has been installed to a determined load and then recorded and certified. This is often for insurance purposes.

Masts and rigging need to be installed, commissioned and checked to a set of precise loads, both Rod and Wire. Over the lifetime of the mast and rigging continual checking and referencing to these defined loads is also required.

Rig-Sense Pro provides accurate measurement of Ø5-20mm Cable, -6 to -16 Rod up to 8000kg max tension.

Handheld, simple to operate with a clear digital display, Rig-Sense Pro offers OEM's, Riggers, Spar Manufacturers and industrial installers an easy to use tool for accurately recording the load data. For a pre-installed array of calibrations for cable and rod.

Interfacing with a comprehensive Rig-Sense App the data is collected and stored for report writing later.

Supplied with calibration check rod.

Supplied in protective storage and travel case with charging cable and vernier.



Model	Description
RGS-PRO/0520	Rig Sense Pro

Product Weight	2.65kg
-----------------------	--------

DETAILS

Wide Range

- Ø5-20mm cable
- 06 to -16 rod
- 8000kg max tension

High Contrast Read-Out

- Stores multiple cable calibrations
- Navigate to desired cable for adjustment setting

Operation

- Select cable type/size defined on display
- Adjust sliding deflector to required setting
- Unlock handle
- Lift handle fully
- Hook lower sheave on cable
- Hook upper sheave on cable
- Close handle
- Adjust cable to desired tension
- Select from multiple units and % of breaking strain
- Set visual/audible load warning

Auto Close Gate

- Remains attached to cable even if cable goes slack
- Additional cable lock supplied (not shown) to grip cable and prevent falling
- Hand tether for secure use

Handle Lock

- Operated from lower handle
- Prevents unsafe one-handed removal
- Allows carrying from central handle

High Accuracy Measurements

- Small cable deflection to minimize tightening effect from bending
- Cable adjuster increases leverage for smaller cables for increased sensitivity
- IPX7 waterproof

Robust marine construction:-


- Anodized aluminium plate structure - Stiff and lightweight
- Stainless steel deflector sheaves for low wear
- 316 stainless pins and fixings

Battery

- UN38.3 Certified Flight Safe
- 3.7V Lithium Polymer (LiPo) 2000 mAh (7.4Wh)
- USB-C charging (cable supplied)
- Detach Screen Unit (3 screws) to separate battery, if required for flying



RIG SENSE RIG TENSION GAUGE FOR 2-5MM & 5-8MM WIRE & CABLE

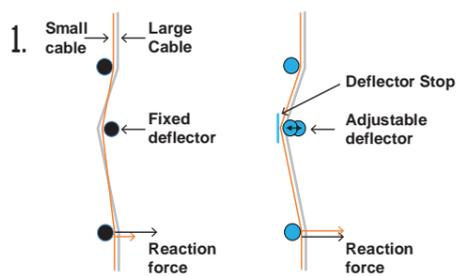

LOOS GAUGE RIG-SENSE

Rig-Sense by Spinlock is a rig tension device for measuring the loads in wire and rope standing rigging used on boats. Cable tension gauges generally operate using the same principle: bend the cable between three points and measure the reactive force on one of those points:

- Mechanically with a spring
- Electronically with strain

Rig-Sense uses a mechanical principle similar to other rig gauges, but with four distinct improvements to achieve the key features

1. ADJUSTABLE CABLE DEFLECTOR

Rig-Sense uses an adjustable central deflector, same deflection for all cable sizes. So output does not vary with cable size

The other rig tension gauges have a fixed central deflector which means larger diameter cable will have larger deflection than smaller cable diameter, so output varies with cable size

2. MEASUREMENT IN KG

With the Rig-Sense scale, we've kept the scale true, so there is no need for conversion

All cable sizes use the whole scale and work with both imperial and metric cable, fibre and even rope

3. PROFILED STAINLESS STEEL DEFLECTORS

Rig-Sense uses large radius stainless steel deflectors which follow the natural bend in cable. This cancels out differences in cable bending stiffness. Tension will measure the same for different sizes and materials

Hard material supports cable over larger area – with no indentation and consistent, repeatable output

4. COMPOSITE LEAF SPRING

Rig-Sense uses a composite leaf spring. The advantages are:

- High precision control of spring rate
- Compact shape allows slender design less likely to be damaged
- Cannot over-stretch
- Allows for calibration during assembly
- No corrosion



RIG SENSE RIG TENSION GAUGE FOR 2-5MM & 5-8MM WIRE & CABLE

FEATURES

Rig Tension gauge for repeatable rig settings - aids race set up and preparation

Measure and set loads on both wire and fibres

Diameter range 2-5mm and 5-8mm

Direct linear scale with tension output

Composite calibrated leaf spring

Stainless steel contact points

Ergonomic robust body

Compact size, durable and light

Easy one-handed operation

Storage bag included

Free Rig-Sense App(iOS and Android)



Model	Description
RGS/0205	Rig Sense 2-5mm Wire/Fibre
RGS/0508	Rig Sense 5-8mm Wire/Fibre



SENSE APPS

THREE NEW APPS FOR THE SENSE RANGE

NEW

LOAD-SENSE APP


Free iOS & Android App

Completely rebuilt with a simplified user interface and sleek new design

Full screen modes for numerical and graphical display

Wireless Device bonding for secure connection

Display and log and share data from multiple devices

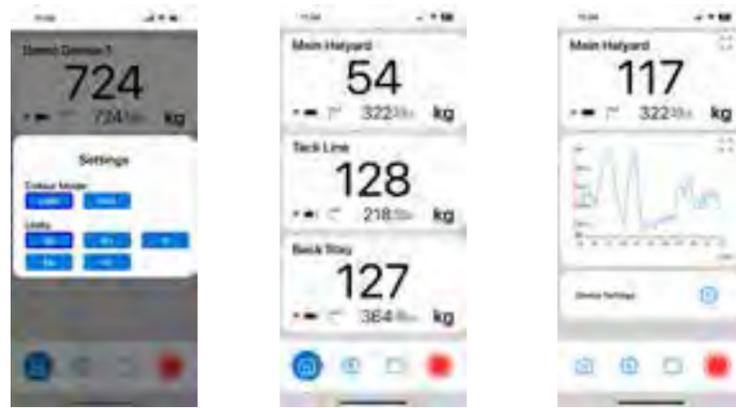

RIG-SENSE APP

Free iOS & Android App


Completely rebuilt with a simplified user interface and sleek new design

Tension Converter Tool to instantly transfer readings from other gauges

Pre-loaded with rig settings for most dinghy and small keelboat classes

Create, edit, duplicate and share tables with ease

Adjustable text size and dark theme

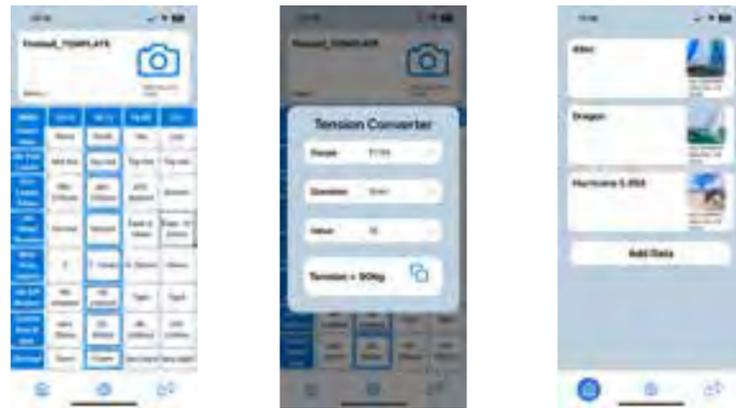

RIG-SENSE PRO APP

Free iOS & Android App


iOS & Android App

Monitor and log Cable & Rod tension remotely

Full screen modes for numerical and graphical display

Wireless Device bonding for secure connection

Display and log and share data from multiple devices

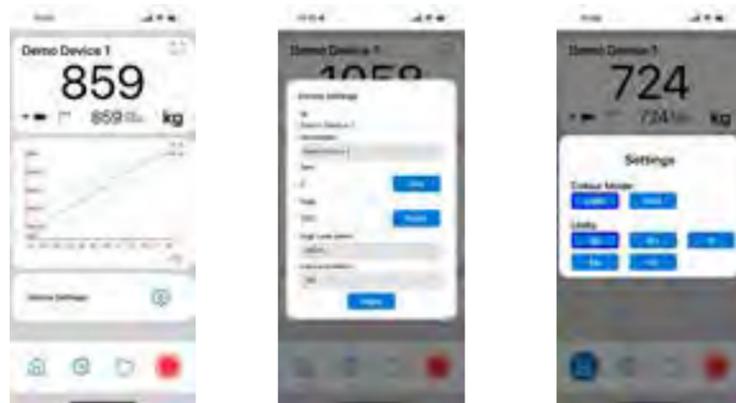

Download App



Download App



Download App



MARKETING MATERIALS

A GUIDE TO SPINLOCK RESOURCES AVAILABLE TO YOU

Our growing range requires many display options for store and exhibition. We have a new set of displays for the Protect range which offers a complete flexible system of assembly to suit the space and stock being displayed

Displays are also coupled with a wide range of posters, standup graphics and headers, and we are always happy to discuss custom options to suit your display and merchandising needs

MEDIA PORTAL

Online portal for all resources and technical support from the Spinlock team, including; images, video, social media content, point of sale, brochures, logos, training, weights and press releases - spinlock.co.uk/portal

Please share the Spinlock Marketing Portal with your network, we are happy for this great resource to be shared with dealers, stores, influencers and many more!

PRO SUPPORT

Online technical support from the Spinlock team - prosupport@spinlock.co.uk

CAD LIBRARY

Technical files including drill guides and cad files are available to download from the Cad Library - spinlock.co.uk/cadlibrary

PROTECT RETAIL GRAPHICS & POSTERS

Contact Spinlock for custom sizes and artwork



RET-DVR/GRAPHIC
Deckvest 6D
Retail Graphic



RET-PFDW/GRAPHIC
CONTROL
Retail Graphic



RET-DV/GRAPHIC
Deckvest 6D
Retail Graphic




RET-DVL/GRAPHIC
ALTO BELT PACK
Retail Graphic



RET-DVC/GRAPHIC
Deckvest VITO
Retail Graphic



RET-PFD/GRAPHIC
FOIL
Retail Graphic

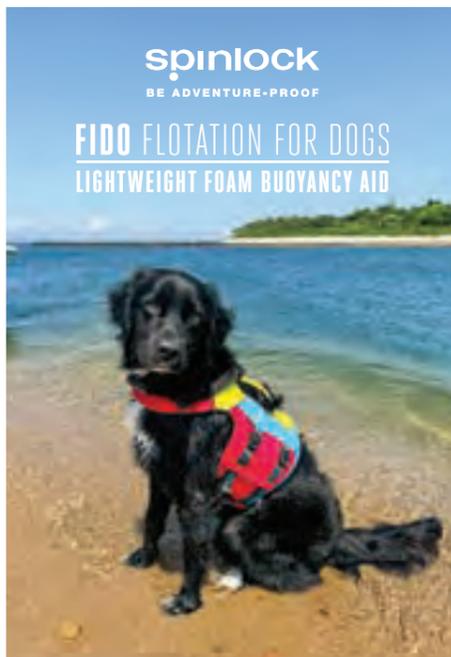

VENTURE ADVENTURE BAG RANGE

- | | | |
|--|--|---|
| 27 LITRE DECK BAG | 55 LITRE DUFFLE BAG | 100 LITRE KIT BAG |
| <ul style="list-style-type: none"> Heavy duty ripstop fabric Sternum strap Water bottle pocket Laptop sleeve Internal zipped pocket | <ul style="list-style-type: none"> Heavy duty ripstop fabric Large carry handle on top Removable backpack straps Side carry grab handles Cabin bag size | <ul style="list-style-type: none"> For longer adventures Top carry handle Side carry handles End grab handles External zipped pocket |



FIDO FLOTATION VEST FOR DOGS

- Lightweight foam flotation
- 3 sizes; extra small, small and medium
- Secure and snug fit that allows for freedom of movement
- Breathable fabrics ensures proper ventilation, keeping your dog cool
- Tailored adjustable straps, can be adjusted to fit your dog comfortably
- Convenient handle allows for easy and retrieval of your dog from the water
- Designed with your dog's comfort in mind, prevents discomfort during extended wear




EXPLORER 100% WATERPROOF BAGS

- | | |
|--|---|
| 35 LITRE ROLL TOP BAG | 2 LITRE WAIST-WORN BAG |
| <ul style="list-style-type: none"> Multiple ways to close the top opening Side mesh water bottle pocket External essentials zipped pocket Attachment points and bungee stash | <ul style="list-style-type: none"> Rated to IPX7 - fully waterproof up to 1 metre Use with beacon: AIS MOBIL, PLB and PLB3 Made with TRU ZIP self-healing zipper Internal mesh pocket and lanyard |



MARKETING AND ADVERTISING MATERIALS

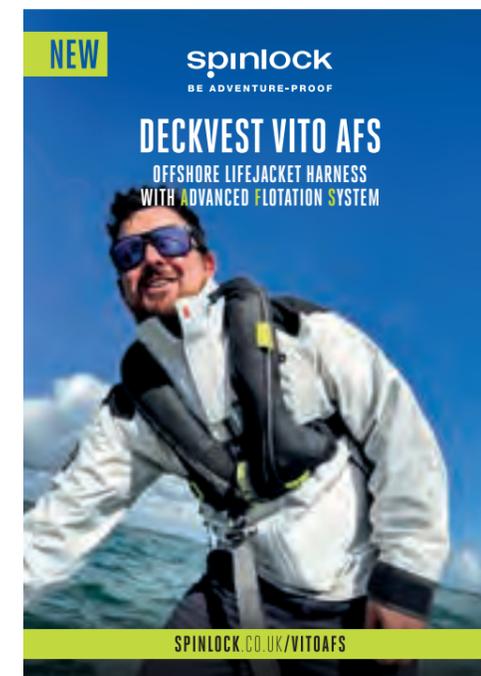

Model	Description
Additionally, with these units, customers might order product wire frames of choice:	
RET-DW/FRAMEDV	Deckvest 6D frame
RETDW/FRAMEDVL	Deckvest LITE frame
RET-DW/FRAMEFOIL	FOIL frame
RET-DW/FRAMEWING	WING frame
RET-DW/FRAMECENTO	Deckvest CENTO frame
RET-DW/FRAMEMPH	Wire Frame Display Mast Pro Harness
RET-DW/FRAMESFL	Wire Frame Display Safety Lines
RET-DW/FRAMEKNEE	Wire Frame Display Kneepads
RET-DW/FRAMEVT	Deckvest VITO Frame
RET-DW/FRAMEDVL+	Deckvest LITE+ Frame



RETAIL SLAT WALL DISPLAY
RET-WALLO4
£40.00



RETAIL SLAT WALL WITH SHELF DISPLAY
RET-COMBO4
£80.00



PRODUCT WIRE FRAME DISPLAYS FOR SHOP WALLS



HIGH LOAD SHELF EXTENSION
RET-SHELFHLO8
£60.00



RETAIL ACTIVE SHELF DISPLAY
(Includes PXR, XAS & XTS)
RET-SHELF14
£40.00



RETAIL ACTIVE PXR SHELF DISPLAY
RET-SHELFPXR06
£20.00


RETAIL IDEAS

Retail Gondola Display

The 4 side retail gondola display unit is now available. This display enables the clear and simple display of Spinlock products from both the CONTROL and PROTECT ranges together if necessary, maximising space

The unit has a small footprint measuring 1200mm². The height of the unit measures 1300mm with the option for a removable mannequin or wire frame system to be on top creating more interest and using all available space. It works well in conjunction with the new PROTECT retail displays


Contact Spinlock to discuss requirements

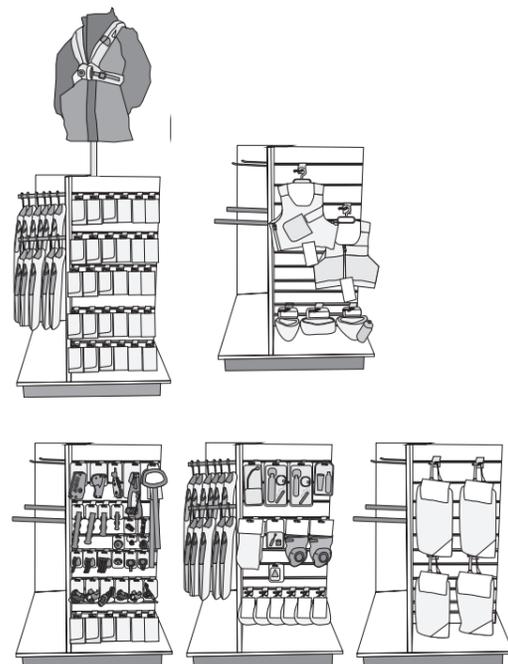

ALTO RETAIL DISPLAY

RET-ALTO

Freestanding or wall mountable ALTO display with top graphic. Holds 8 packaged ALTO products on standard retail pegs. Comes with pegs. Order ALTO product separately

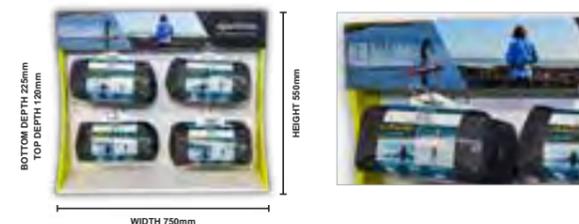

RETAIL WALL VERTICAL LOGOS

RET-VLOGO

A logo graphic that hangs vertically to mark the edges of Spinlock products on retail walls or other displays



TILLER EXTENSION SAMPLE CARD

RET-TILLER

Hanging card graphic with sample tiller tubes attached demonstrating the colour and finish of the range



CATEGORY HEADINGS GRAPHIC

RET-WALLHEADER/CONTROL
RET-WALLHEADER/PROTECT
RET-WALLHEADER/SENSE



RETAIL DISPLAY STRIP GRAPHICS

RET-STRIP
CONTROL PROTECT OR SENSE

A range of strip graphics that sit between standard slat wall channels, these assorted graphics lift and freshen a display. A mix of images for Control, Protect and Sense, the graphics position the Spinlock brand at retail



RETAIL HANGER WITH GRAPHICS

RET-HANGER GRAPHIC
CONTROL PROTECT OR SENSE

Available in packs of 6, these retail hooks also have a graphic card with product information and support 6 retail hangers with 6 graphics in the product range of CONTROL and PROTECT



spinlock

PORTAL

- IMAGES
- VIDEOS
- SOCIAL MEDIA CONTENT
- DOCUMENTS
- LOGOS
- TRAINING
- PRODUCT WEIGHTS
- POINT OF SALE

SOCIAL MEDIA

Category: **All**

All
Control
Protect
Sense

Select all Download Selected

hello@retailplus.co.uk
Log Out

RECENT UPLOADS



The Spinlock Portal is for the use of the marine trade for information not available on our main website

CONTROL, PROTECT and SENSE categories re-ordered and updated

ALTO Orange and Atoll Blue images on Portal with a rear shot of the usage print and 'pull to inflate' print

Deckvest 6D images in Black/Grey are on the Portal

spinlock

PORTAL

- IMAGES
- VIDEOS
- SOCIAL MEDIA CONTENT
- DOCUMENTS
- LOGOS
- TRAINING
- PRODUCT WEIGHTS
- POINT OF SALE

IMAGES

Category: **All**

All
Control
Protect
Sense

Select all Download Selected

hello@retailplus.co.uk
Log Out

RECENT UPLOADS



The Spinlock Portal is for the use of the marine trade for information not available on our main website

CONTROL, PROTECT and SENSE categories re-ordered and updated

ALTO Orange and Atoll Blue images on Portal with a rear shot of the usage print and 'pull to inflate' print

Deckvest 6D images in Black/Grey are on the Portal

spinlock

PORTAL

-  IMAGES
-  VIDEOS
-  SOCIAL MEDIA CONTENT
-  DOCUMENTS
-  LOGOS
-  TRAINING
-  PRODUCT WEIGHTS
-  POINT OF SALE

ACCESS EVERYTHING YOU NEED FROM SPINLOCK

POINT OF SALE	
BROCHURES	
LOGOS	
TRAINING	
WEIGHTS	
PRESS RELEASES	

Select all Download Selected

hello@retailplus.co.uk

Log Out

RECENT UPLOADS




The Spinlock Portal is for the use of the marine trade for information not available on our main website

CONTROL, PROTECT and SENSE categories re-ordered and updated

ALTO Orange and Atoll Blue images on Portal with a rear shot of the usage print and 'pull to inflate' print

Deckvest 6D images in Black/Grey are on the Portal

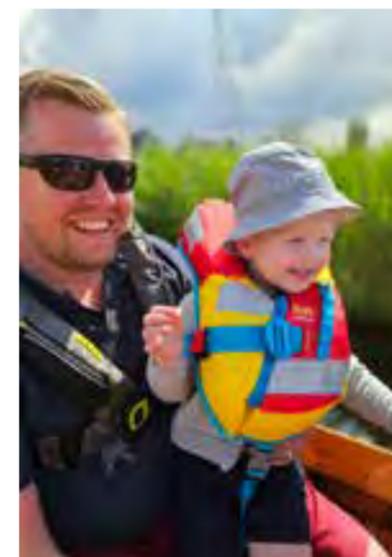

spinlock

PORTAL

-  IMAGES
-  VIDEOS
-  SOCIAL MEDIA CONTENT
-  DOCUMENTS
-  LOGOS
-  TRAINING
-  PRODUCT WEIGHTS
-  POINT OF SALE

VIDEOS

Category: All Control Protect Sense

 Deckvest VITO: Adjusting size	 Rearing repacking	 EAC Carbon explained
 Ceramic parts explained	 Servicing XCS Clutch	 DURO+ features & fit
 MOB1 features & fitting	 Deckvest VITO features & fit	 DURO SOLAS features & fit
 Rig-Sense	 Deckvest 6D features & fit	 DURO features & fit

Select all Download Selected

hello@retailplus.co.uk

Log Out

RECENT UPLOADS



The Spinlock Portal is for the use of the marine trade for information not available on our main website

CONTROL, PROTECT and SENSE categories re-ordered and updated

ALTO Orange and Atoll Blue images on Portal with a rear shot of the usage print and 'pull to inflate' print

Deckvest 6D images in Black/Grey are on the Portal

EMPOWERING YOUR KNOWLEDGE AND EXPERTISE

Welcome to the Spinlock Training Programme. These courses are crafted to enhance your understanding of our company and the wide variety of products we offer. Whether you're involved in sales, marketing, customer service, or work as an online influencer, by the end of the course, you'll be equipped to confidently discuss Spinlock with anyone.

IMPROVE KNOWLEDGE

IMPROVE CUSTOMER SERVICE

IMPROVE CUSTOMER RETENTION

IMPROVE SALES

REVIEWS

"Absolutely a great course, nice videos and you held my attention the whole time. A great refreshment even after being Spinlock Distributor for 25 years. Well done!"

"I have been selling Spinlock for over 20 years and I enjoyed this course"

"I have a vast knowledge of the Spinlock lifejacket line and was happy to learn more about Control and Sense lines."

FLEXIBLE, ENGAGING AND ACCESSIBLE

Complete the course at your convenience from your mobile phone or computer. Each lesson is crafted into bite-sized videos, making it easy to follow, absorb, and revisit whenever you need a refresher.

EXCLUSIVE BENEFITS

Upon completing the course, you'll receive the prestigious Spinlock Ambassador certificate. This not only recognises your expertise but also unlocks exclusive benefits.

MOBILE APP

Once you have signed up and enrolled on the Spinlock Ambassador course, you can download the 'Thinkific' App to take the course from any mobile device, anywhere, anytime! Search 'Spinlock' in the Thinkific App and login.

ALL

This all-encompassing course covers our entire product range across all three categories; Control, Protect and Sense, making it ideal for dealers who represent our full line up

PROTECT

This course is dedicated to our Protect line, featuring Deckvests, Harnesses, Safety Lines, Packs, and more. It's perfect for dealers targeting markets like water-sports and Fishing.

CONTROL & SENSE

This course focuses on our Control products, such as Clutches, Jammers, and Organisers, and includes Load Gauges from our Sense category. It's designed to give boat manufacturers and riggers a deeper understanding of our hardware range.



Any questions email ash@spinlock.co.uk

[TRAINING.SPINLOCK.CO.UK](https://www.spinlock.co.uk/training)



ENG

